

UV SENSOR TYPE FD1xx - FD2xx

FLAME DETECTION DEVICES FOR FUEL OIL AND GAS BURNERS EMITTING BLUE LIGHT



INTRODUCTION

The combustion process, depending on the type of fuel used, emits more or less light radiation belonging to the ultraviolet, visible or infrared spectrum.

Of course, gas oil combustion generates a very bright flame, which is easily detectable by means of sensors using common photocells; nevertheless, at the same time gas oil combustion generates a quantity of substances not completely burnt (unburnt substances), which pollute and dirty the combustion chamber step by step.

By suitably adjusting the combustion, it is possible to solve this problem and improve the flame quality, making it similar to the flame produced by gas, natural gas or propane combustion (blue flame).

Since photocells are not sensitive to blue flame light, in most gas burners the presence of flame is detected by exploiting the ionization principle; to this purpose, you simply need an electrode (electrically isolated metal rod) suitably "immersed" in the flame. This principle is not easily applicable in oil burners, as the electrode immersed in the flame gets dirty quickly (consequently losing its efficiency) and modifies the turbulence in the combustion chamber, thus creating serious problems.

For all these reasons, it is necessary to detect the presence of flame by means of ultraviolet sensitive detectors.

DESCRIPTION

The FDx sensor uses a silicon preamplified active element, specifically designed for blue flame burner applications; the UV light peak detection of this sensor is around 310 nm.

Thanks to the incorporation of suitable electronic components, this device can be fitted both to the BRAHMA analogical control boxes (for example EUROBOX, EUROFLAT, MINIFLAT, MICROFLAT, EUROGAS, EUROOIL, OIL-SYSTEM series) and to the BRAHMA digital control boxes (for example Digital Microflat, Digital Microflat "N", EUROGAS type VM44G, EUROOIL type VM44O series).

In order to meet the widest range of market requirements, this device is available in the FD1 version (with front view) and in the FD2 version (with lateral view). In application where the flame is far from the point of detection a high sensitivity sensor can be required.

Other versions of the sensor are also available with dedicated documentation:

- photodiode type FD.... BT, for 12 / 24Vac / dc operating gas and oil burners, document 30897;
- photodiode type FD. /S for Brahma gas and oil burners, document 20884.

Please note that the FDx detector is sensitive to the ultraviolet component of visible light; therefore, its use is recommended in burners fitted with closed combustion chambers and in an application environment perfectly shielded from visible light.

FEATURES

- | | |
|-------------------------------|--------------------|
| - Supply voltage | 220-240V @ 50-60Hz |
| on request: | 110-120V @ 50-60Hz |
| - Power consumption | 1VA |
| - Visible band | 290-350nm |
| - Reception angle | 8° |
| - Max. output current | 500µA |
| - Operating temperature range | -20 to +70°C |
| - Max. humidity | 95% |

FD1xx mechanical features

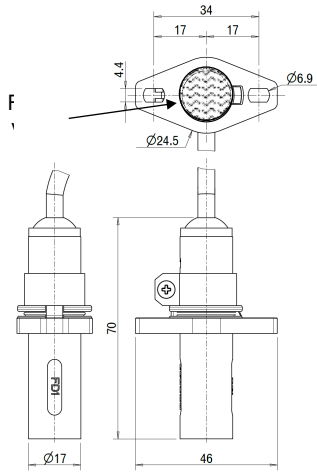


Figure 1

FD2xx mechanical features

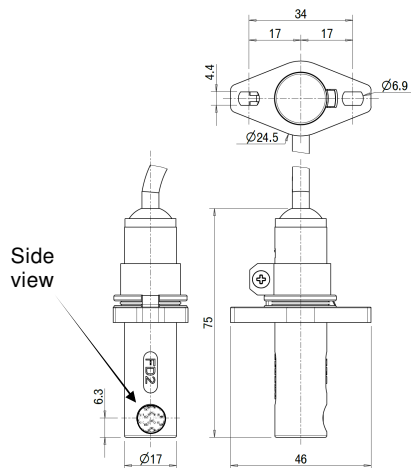


Figure 2

Drilling plane (for FD1 and FD2)




Figure 3

Note: all measurements are expressed in mm

WARNINGS

For a correct and safe use of FDx sensors, please follow the directions below:


- Place the device so that the light from the flame hits the field of view (8°).
- Avoid placing unsuitable transparent materials between the sensor and the flame light; for example, glass has filter characteristics (shield) against the ultraviolet component of light.
- Avoid installing the device close to heat sources, which may cause inner temperature increase and consequently damage the sensor.
- The device must be exclusively fitted to the control boxes mentioned in the paragraph “Description”.
- Avoid wiring the FDx cable with ignition or high voltage cables.

WIRING DESCRIPTION


- Brown wire Live
- Cyan wire Neutral
- White wire Output

APPLICATION EXAMPLE

The following diagram shows an application example with a gas oil burner using an EUROOIL safety device type GR1.

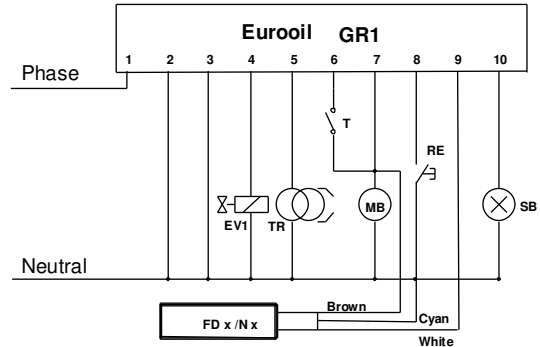

The following diagram instead shows an application example with a gas burner using an EUROGAS safety device type VM44G.

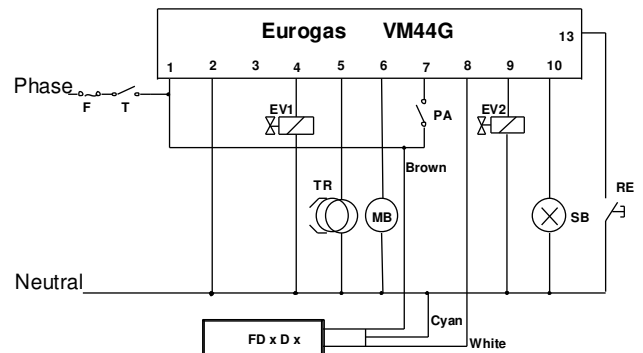

PART REFERENCE

FD (a) (b) (c) (d) CM (e)

- (e) 11/12: Supply voltage 110/120Vac
- 22/24: Supply voltage 220/240Vac
- (d) Length of the cable
- (c) no letter: standard sensitivity
- H: high sensitivity
- (b) /N: analogical control boxes
- D: digital control boxes
- (a) 1: Front view (figure 1)
- 2: Side view (figure 2)

Examples:

- **FD1DH 60CM 22/24:** sensor with front view, used with digital BRAHMA control boxes, with a high sensitivity. The length of the cable is 60cm. Supply voltage is 220/240Vac.
- **FD2/N 60CM 22/24:** sensor with lateral view, used with analogical BRAHMA control boxes. The length of the cable is 60cm. Supply voltage is 220/240Vac.



NOTES ABOUT PRODUCT DISPOSAL The device contains electronic components and cannot therefore be disposed of as normal household waste. For the disposal procedure, please refer to the local rules in force for special waste.

ATTENTION -> Company Brahma S.p.A. takes no responsibility for any damage resulting from Customer tampering with the product.

BRAHMA S.p.A.

Via del Pontiere, 31
37045 Legnago (VR)
Tel. +39 0442 635211 - Telefax +39 0442 25683
http://www.brahma.it
E-mail: brahma@brahma.it

10/1/2022 Subject to amendments without notice