

IFRM 08P1703/S14L

Inductive proximity switch - miniature

Article number: 10224348

overview

- 2 mm
- PNP make function (NO)
- connector M12
- -25 ... 75 °C
- IP 67



Technical data

general data

mounting type	flush
nominal sensing distance Sn	2 mm
hysteresis	3 ... 20 % of Sr
output indicator	3 port LED red

electrical data

switching frequency	< 5 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	12 mA
output circuit	PNP make function (NO)
voltage drop Vd	< 2 VDC
output current	< 200 mA

electrical data

short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
material (sensing face)	PBT
housing material	stainless steel
dimension	8 mm
housing length	50 mm
connection types	connector M12
tightening torque max.	10 Nm (Front: 7 Nm)

ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

remarks

- M12 x 1 quick disconnect


2020-06-26 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

IFRM 08P1703/S14L

Inductive proximity switch - miniature

Article number: 10224348

dimension drawing

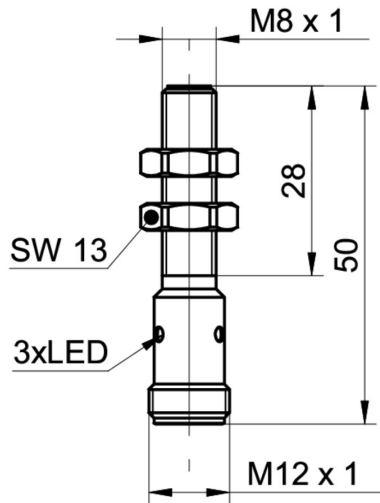

connection diagram

