

IFRM 12P13T1/PL

Inductive proximity switch - outdoor and washdown

Article number: 11016679

overview

- 6 mm
- PNP make function (NO)
- cable PUR 3 x 0,25, 2 m
- -40 ... 80 °C
- IP 67



Technical data

general data

mounting type	non-flush
special type	Outdoor design
nominal sensing distance Sn	6 mm
hysteresis	2 ... 15 % of Sr
output indicator	LED red

electrical data

switching frequency	< 2 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	10 mA
output circuit	PNP make function (NO)
voltage drop Vd	< 2 VDC
output current	< 200 mA

electrical data

short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
material (sensing face)	PBT
housing material	brass nickel plated
dimension	12 mm
housing length	50 mm
connection types	cable PUR 3 x 0,25, 2 m
tightening torque max.	15 Nm (Front: 10 Nm)

ambient conditions


operating temperature	-40 ... +80 °C
protection class	IP 67

IFRM 12P13T1/PL

Inductive proximity switch - outdoor and washdown

Article number: 11016679

dimension drawing

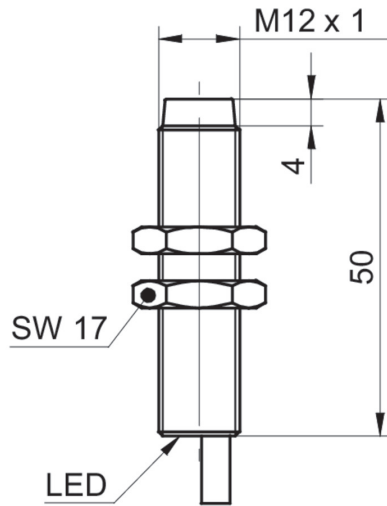

connection diagram

