


Inductive sensor


NBB15-30GM50-WO



- Basic series
- 15 mm flush
- 2-wire AC

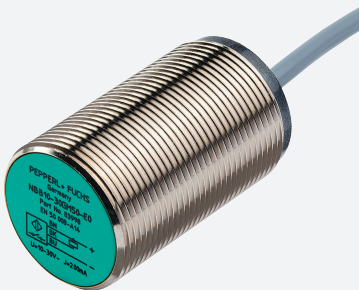

Dimensions



Technical Data

General specifications		
Switching function		Normally closed (NC)
Output type		Two-wire
Rated operating distance	s _n	15 mm
Installation		quasi flush
Output polarity		AC
Assured operating distance	s _a	0 ... 12.15 mm
Actual operating distance	s _r	13.5 ... 16.5 mm
Reduction factor r _{Al}		0.33
Reduction factor r _{Cu}		0.28
Reduction factor r ₃₀₄		0.81
Nominal ratings		
Operating voltage	U _B	20 ... 253 V

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group USA: +1 330 486 0001 Germany: +49 621 776 1111 Singapore: +65 6779 9091
www.pepperl-fuchs.com fa-info@us.pepperl-fuchs.com fa-info@de.pepperl-fuchs.com fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Switching frequency	f	0 ... 20 Hz
Hysteresis	H	typ. 5 %
Reverse polarity protection		reverse polarity tolerant
Voltage drop	U _d	< 5 V (I _L > 50 mA); < 8 V (I _L < 50 mA)
Momentary current (20 ms, 0.1 Hz)		0 ... 1600 mA
Operating current	I _L	5 ... 200 mA
Off-state current	I _r	0 ... 1.7 mA
Operating voltage indicator		LED, green
Switching state indicator		LED, yellow

Compliance with standards and directives

Standard conformity		
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

UL approval		cULus Listed, General Purpose
CSA approval		cCSAus Listed, General Purpose
CCC approval		Certified by China Compulsory Certification (CCC)


Ambient conditions

Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
---------------------	--	--------------------------------

Mechanical specifications


Connection type		cabl PVC , 2 m
Core cross-section		0.75 mm ²
Housing material		brass, nickel-plated
Sensing face		PBT
Degree of protection		IP67
Note		1) In the temperature range below 0 °C, permissible operating voltage U _b 80...253 V Safety fuse ≤ 0.3 A (quick-blow) according to IEC 60127-2 Sheet 1 Recommendation: after a short circuit, check that the device is functioning correctly.

Connection



Mounting

Installation conditions



Accessories

	BF 30	Mounting flange, 30 mm
	EXG-30	Quick mounting bracket with dead stop

Release date: 2020-03-23 Date of issue: 2020-03-30 Filename: 801649_eng.pdf