




Inductive sensor

NJ1,5-F2-E2-V1

- 1.5 mm with switching tappet
- 3-wire DC



Dimensions

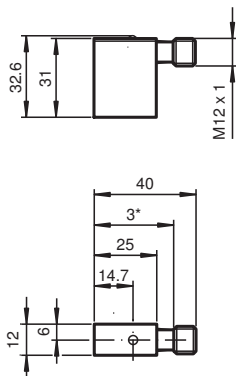


Technical Data

General specifications		
Switching function		Normally open (NO)
Output type		PNP
Rated operating distance	s _n	1.5 mm
Installation		flush
Output polarity		DC
Assured operating distance	s _a	0 ... 1.215 mm
Nominal ratings		
Operating voltage	U _B	10 ... 30 V DC
Switching frequency	f	0 ... 1000 Hz
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U _d	≤ 3 V


Technical Data

Operating current	I_L	0 ... 200 mA
No-load supply current	I_0	≤ 15 mA
Switching state indicator		LED, red
Compliance with standards and directives		
Standard conformity		
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CSA approval		cCSAus Listed, General Purpose
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		Connector M12 x 1 , 4-pin
Housing material		PA
Degree of protection		IP67
Note		Use a stop screw combined with a model -F2 sensor from Pepperl+Fuchs GmbH. The maximum actuation speed of the control slide is 0.1 m/s

Connection



Connection Assignment



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Release date: 2020-03-20 Date of issue: 2020-03-30 Filename: 086588_eng.pdf

Additional Information


The inductive proximity sensor with plug-in acknowledgement elements is designed for applications where the simple installation of an adjustable mechanical stop with electronic acknowledgement is required.

Heavy duty fine threaded stop screws serve as finely adjustable end stops.


The state of the acknowledgement element is indicated by the built-in LED on the proximity sensor.

Accessories:

Stop screws (Acknowledgement elements)



Type Coding	A	B	L	L1	L2	Load F max.
AS 08/15	M 8 x 1	6	15	3.5	2	2 000 N
AS 08/40	M 8 x 1	6	40	3.5	2	2 000 N
AS 10/50	M 10 x 1	7	50	2.5	1	9 500 N
AS 12/60	M 12 x 1	9	60	2	0.5	20 500 N
AS 12/80	M 12 x 1	9	80	2	0.5	20 500 N

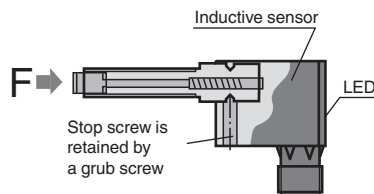

Accessories

	AS 12/80	Stop screw for series F2 sensors
	V1-G-2M-PUR	Female cordset, M12, 4-pin, PUR cable
	V1-W-2M-PUR	Female cordset, M12, 4-pin, PUR cable
	AS 08/15	Stop screw for series F2 sensors
	AS 08/40	Stop screw for series F2 sensors
	AS 10/50	Stop screw for series F2 sensors
	AS 12/60	Stop screw for series F2 sensors