

overview

- distance measuring
- 0 ... 3 mm
- push-pull / IO-Link
- IO-Link
- connector M8
- 25 ... 75 °C
- IP 67



Technical data

general data

mounting type	flush
special type	linearized
type	distance measuring
measuring distance Sd	0 ... 3 mm
resolution	< 0,005 mm (High Accuracy Mode)
repeat accuracy	< 0,01 mm
adjustment	IO-Link
teach	Single point, Two point, Window
linearity error	± 10 µm (S = 0 ... 2 mm) ± 90 µm (S = 0 ... 3 mm)
temperature drift	± 2 % (Full Scale; S = 0 ... 2 mm) ± 3 % (Full Scale; S = 0 ... 3 mm)
hysteresis	< 99 % (adjustable)
power on indication	LED green
output indicator	LED yellow

electrical data

response time (factory characteristic)	< 1 ms
switching frequency	< 1,25 kHz
voltage supply range +Vs	8 ... 36 VDC
current consumption max. (no load)	15 mA
output circuit	push-pull / IO-Link
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

communications interface


interface	IO-Link V1.1
baud rate	230,4 kBaud (COM 3)
cycle time	≥ 0,6 ms
process data length	32 Bit
process data structure	Bit 0 = SSC1 (distance) Bit 1 = SSC2 (distance) Bit 3 = alarm Bit 4 = SSC3 (frequency) Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement
IO-Link port type	Class A
adjustable parameters	measuring range switching point switching hysteresis measured value filtering time filters LED status indicators output logic output circuit counter deactivate the sensor element Find Me function
additional data	distance frequency operating cycles operating hours boot cycles operating voltage device temperature histograms

Technical data

mechanical data

type	cylindrical threaded
housing material	stainless steel
dimension	8 mm
housing length	46 mm

dimension drawing

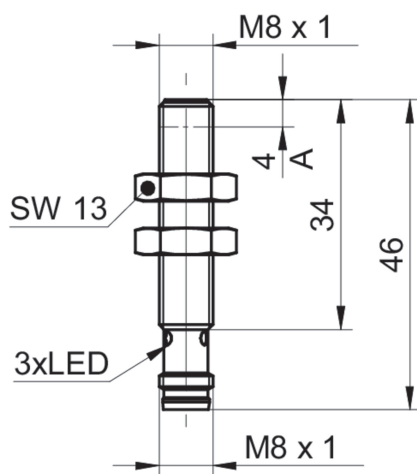


mechanical data

connection types	connector M8
tightening torque max.	10 Nm (A: 7 Nm)


ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

resolution

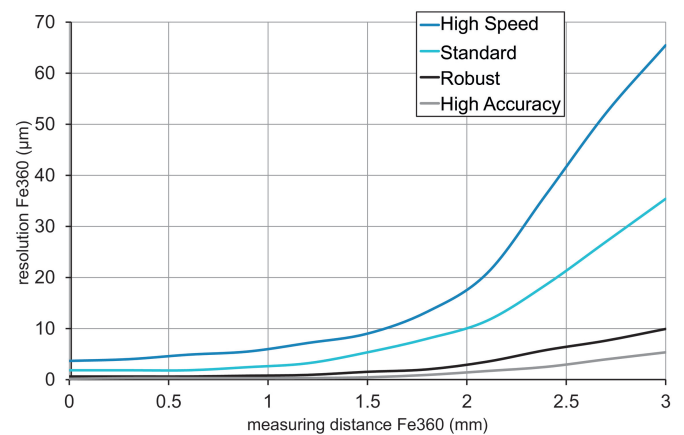

connection diagram

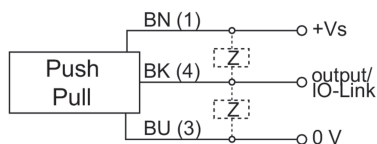

pin assignment

