

overview

- 0 ... 24 mm
- current output
- external Teach-in
- connector M12
- -25 ... 75 °C
- IP 67



Technical data

general data

mounting type	non-flush
special type	linearized
measuring distance Sd	0 ... 24 mm
sensitivity	0,67 mA/mm
resolution	< 0,005 mm (stat.) < 0,01 mm (dynam.)
repeat accuracy	< 0,02 mm
adjustment	external Teach-in
teach	1-point analog, 2-point analog, factory re-set
linearity error	± 480 µm
temperature drift	± 6 % (Full Scale)
Teach-Feedback	LED yellow

electrical data

response time (factory characteristic)	< 5 ms
voltage supply range +Vs	8 ... 36 VDC
current consumption max. (no load)	20 mA

remarks

- external Teach-in
- linear analog output

electrical data

output circuit	current output
output signal	4 ... 20 mA
load resistance	< 50 Ohm/V * Vs - 250 Ohm > 500 Ohm (Vs = 30 ... 36 VDC)
short circuit protection	yes
reverse polarity protection	yes


mechanical data

type	cylindrical threaded
housing material	brass nickel plated
dimension	30 mm
housing length	60 mm
connection types	connector M12
tightening torque max.	100 Nm


ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

dimension drawing

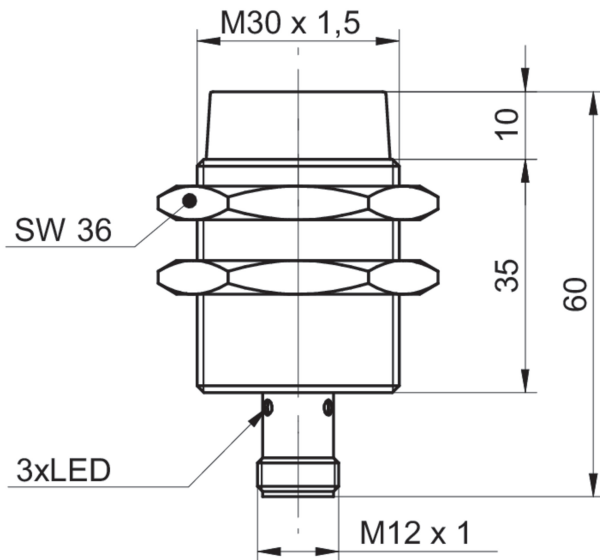

connection diagram

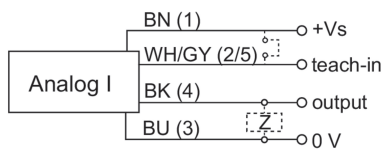

pin assignment

