

overview

- 0 ... 4 mm
- voltage output / PNP
- external Teach-in
- connector M12
- -10 ... 70 °C
- IP 67



Technical data

general data

mounting type	quasi-flush
special type	2 adjust. switching points linearized
measuring distance Sd	0 ... 4 mm
resolution	< 0,005 mm (stat.) < 0,005 mm (dynam.)
repeat accuracy	< 0,01 mm
adjustment	external Teach-in
linearity error	± 16 µm
temperature drift	± 5 % (Full Scale)
output indicator	LED red
Teach-Feedback	LED yellow

electrical data

response time (factory characteristic)	< 2,5 ms
response time (teach in characteristic)	< 3,1 ms
voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	20 mA

remarks

- external Teach-in
- integrated analog- and switching output
- linear analog output

electrical data

output circuit	voltage output / PNP
output signal	0 ... 10 VDC
load resistance	> 1000 Ohm
output current	< 10 mA (PNP)
voltage drop Vd	< 5 VDC (PNP)
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
dimension	12 mm
housing length	60 mm
connection types	connector M12
tightening torque max.	15 Nm (Front: 10 Nm)

ambient conditions


operating temperature	-10 ... +70 °C
protection class	IP 67

IWRM 12Z8704/S14C


Inductive distance measuring sensors - linearized

Article number: 10144963

dimension drawing

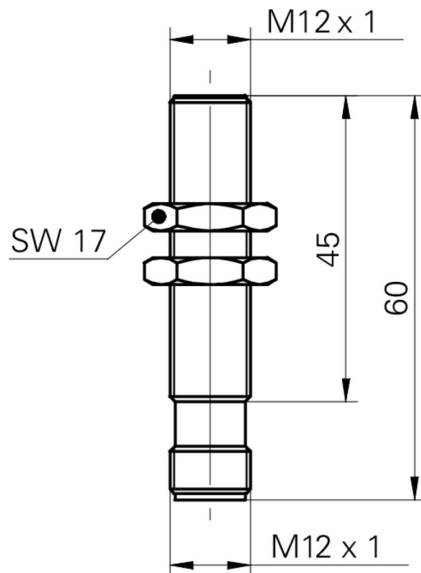

installation drawing

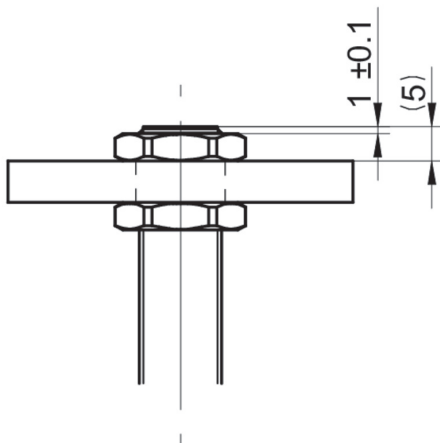

connection diagram

