Baumer
Passion for Sensors

My-Com precision switches

MY-COM B75/200

My-Com precision switches

Article number: 10223759

overview

- break function (NC) mechanical
- cable, 2 m
- -20 … 75 °C
- IP 50

Technical data

general data	
repeat accuracy	< 0,001 mm
activating force	75 cN
mech. pre-run / overrun	- / 1,5 mm approx.
measurement type	contact with medium
direction of approach	frontal
electrical data	
DC voltage max.	15 VDC
switch. current DC max.	2 mA
AC voltage max.	24 VAC
switch. current AC max.	50 mA

electrical data	
output circuit	break function (NC) mechanical
mechanical data	
activating pin	zirconium oxide ZrO<tief>2</tief>
housing material	brass nickel plated
dimension	8 mm
type	cylindrical threaded
housing length	20 mm
connection types	cable, 2 m
ambient conditions	
operating temperature	-20 … +75 °C
protection class	IP 50

2019-10-09 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

ПРОМЭЛЕКТРОНИКА / sales@prom-elec.com

MY-COM B75/200

My-Com precision switches

Article number: 10223759

dimension drawing

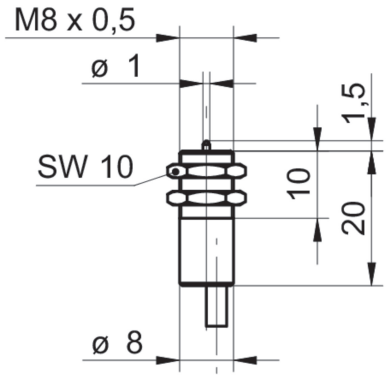

connection diagram



2019-10-09 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.