



Automation for a Changing World

Delta Elevator Drive ED Series



www.deltaww.com

www.importsnab24.ru





Elevator Drive - ED Series

Delta introduces its innovative new elevator control solution: the ED Series Elevator Drive. Based on years of elevator control experience with Delta's first generation VFD-VL series elevator drive, the ED series provides extending features with outstanding performance.

The Delta ED series is UL/CE certified ensuring the best operation reliability. Designed to high safety standards and for high durability, the ED series is an excellent solution for elevator operation in critical environments. It provides versatile and flexible control functions, and an especially smooth start and stop. Smooth operation is critical for providing passengers and goods a safe and comfortable ride. Delta's ED series delivers the best operation efficiency for both passenger and cargo elevators

Delta global sales and services channels are located in 74 countries with professionals and technical teams always available to provide instant support in the shortest time and most cost-effective way. With excellent functions and services, the ED series elevator drive is your most reliable choice for elevator control.



Features

- Supports both asynchronous and synchronous motors
- Auto-tuning with the load attached
- Auto-adjust starting torque, load compensation, manual control
- Precise time sequence for elevator motion (start/stop)
- Compact size for easy installation in the elevator control cabinet and more available space
- Dual-output protection for reliable rides
- Supports 1-phase 230V_{AC} Uninterrupted Power System (UPS)
- Built-in LED keypad, also offers optional pull-out type LCD keypad upon purchase



Features

Simple Instructions


- ▶ **Auto-tuning with the load attached**
 - Ability to perform auto-tuning with load when elevator structure is complete
 - Supports all types of encoders
 - Precisely measures the motor parameters and PG offset angle
 - Load balance without adding additional loads, safe and convenient
- ▶ **Auto-homing mode reduces maintenance costs**
- ▶ **Built-in LED digital keypad. Pull-out type digital keypad is available upon purchase**
- ▶ **Compact control box design strengthens the drive structure**



- Thin body design, with a minimum thickness of only 146mm

Ride Comfort

- ▶ **High efficiency scheduling, precisely controls the elevator for smooth start and stop**

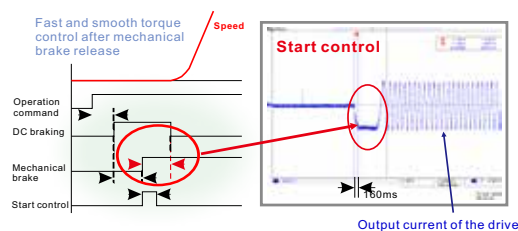

- ▶ **DC braking level and slip compensation to enhance the leveling accuracy and provide a comfortable ride**


Safety Ensured

- ▶ **Dual output protection for reliable ride**
 - Auto-detect output phase loss to ensure proper motor operation
 - Auto-check torque output before the mechanical brake is released




Dual output protection mechanisms strictly ensure elevator operation for passenger safety

- ▶ **Emergency Operation**
 - Supports single-phase 230VAC Uninterrupted Power System (UPS). Light-load direction search function is triggered automatically when power failure occurs
- ▶ **Built-in STO (Safe Torque Off) function**
 - Complies with EN61800-5-2 (STO) and EN61508 (SIL2) standards for high safety protection and reliability
 - Lowers system construction cost by reducing the required amount of output contactors




The light-load direction search function is triggered when power failure occurs and brings the elevator to the nearest floor immediately

System Structure

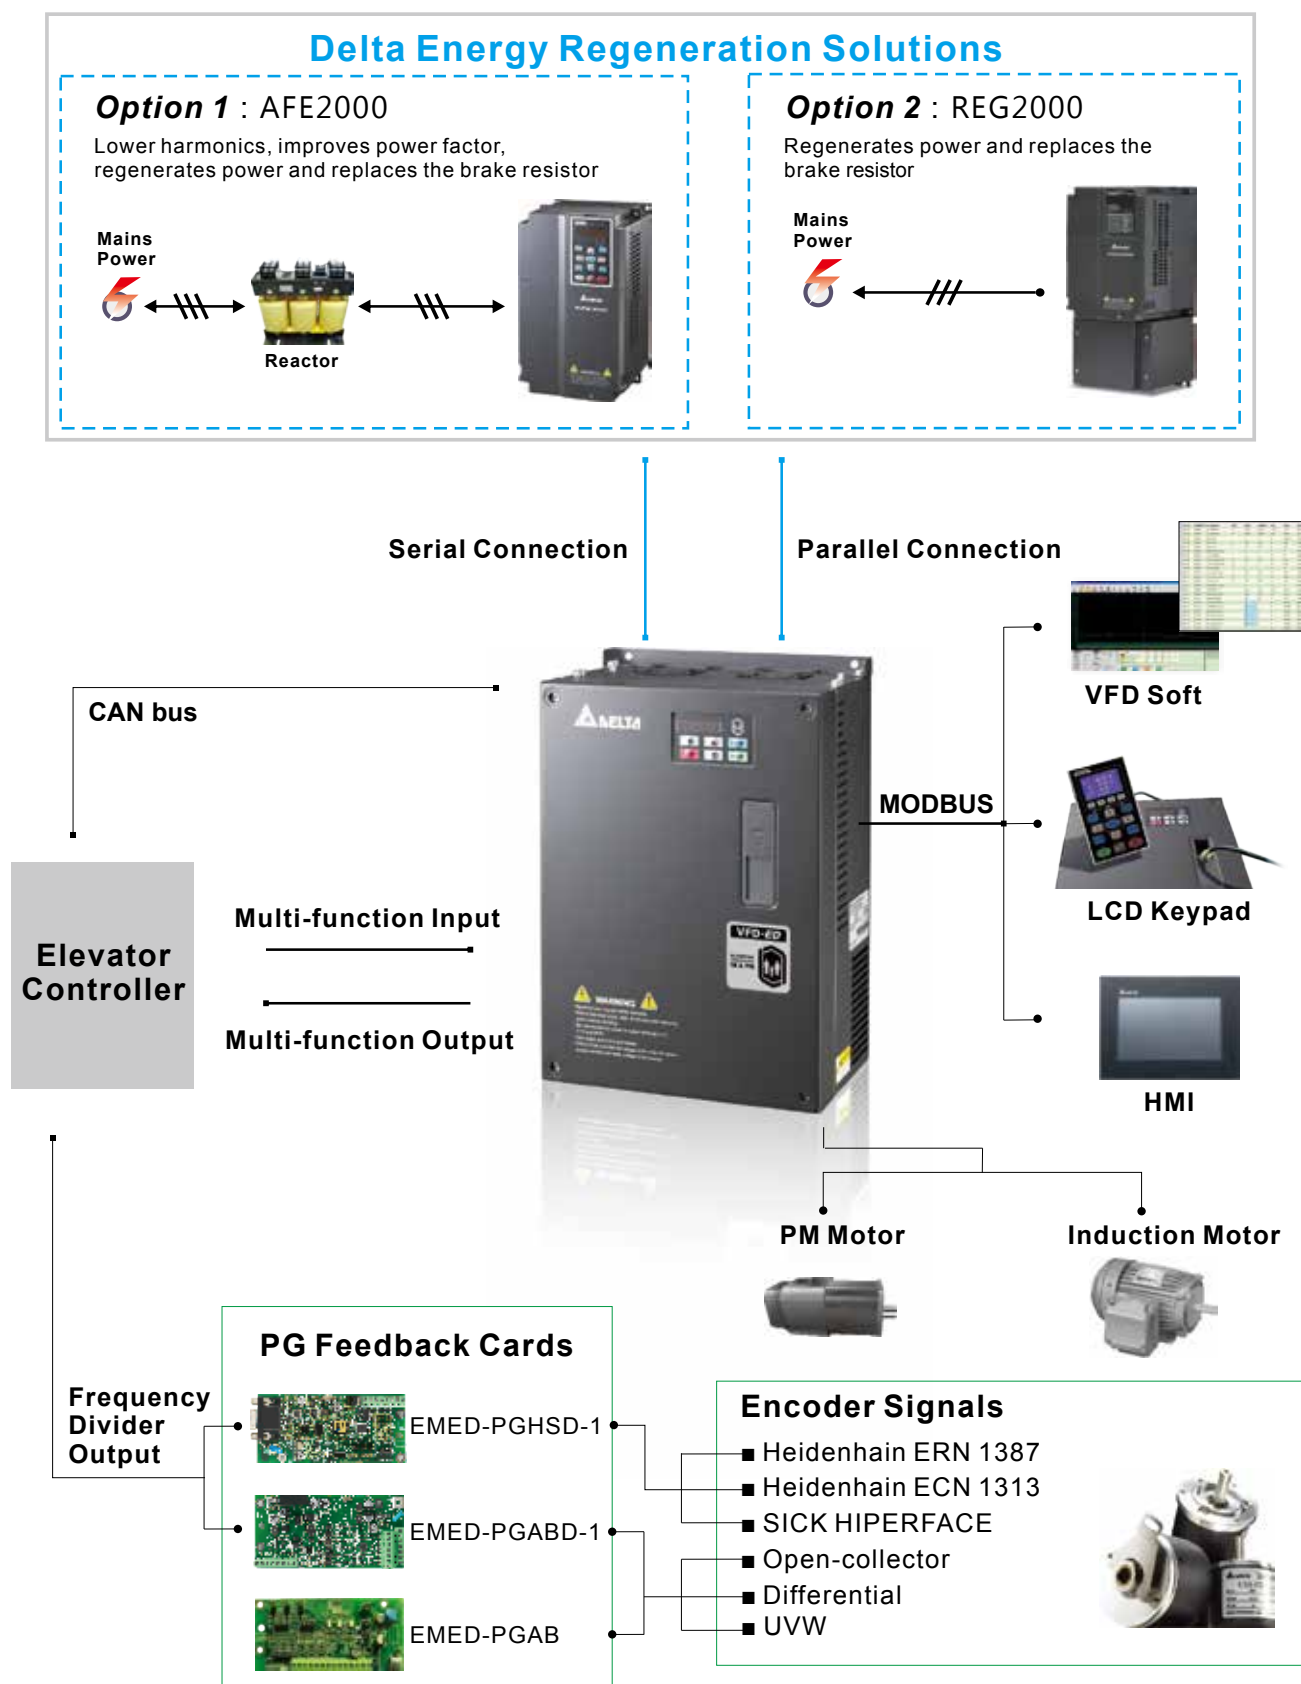


Control Terminals

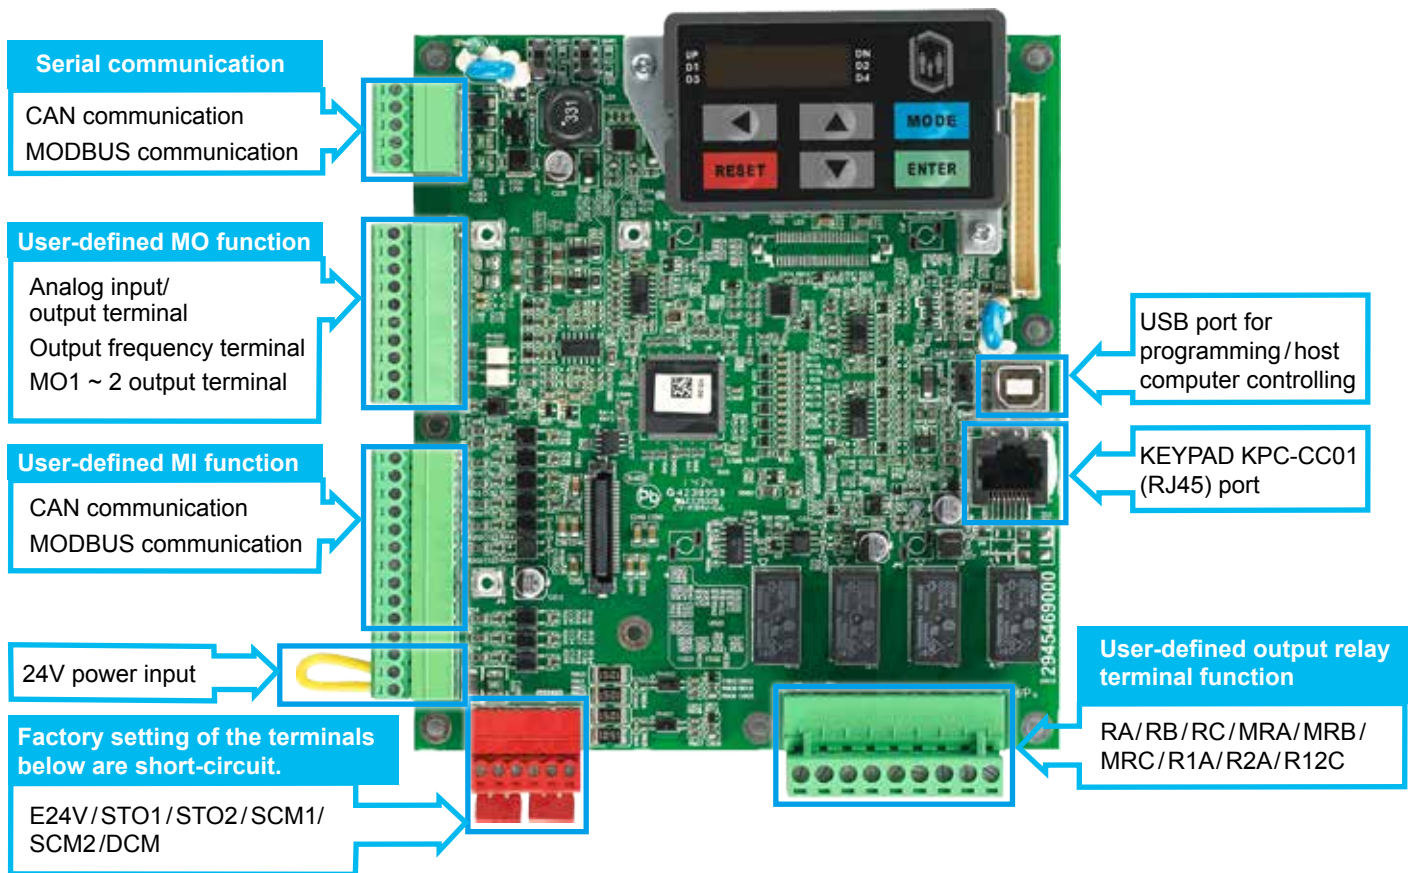


Name	Quantity	Terminal
Multi-function digital input (MI)	FWD x 1 REV x 1 MI x 8	1. FWD: Forward Run/Stop 2. REV: Reverse Run/Stop 3. MI1 ~ MI8 user-defined functions 4. Input impedances: app. 3.75k Ω 5. Input voltage range: 0 ~ 24V _{DC}
Analog input terminal (AUI)	2 units	1. User-defined functions 2. Input range: -10 ~ +10V 3. Input impedance = 20k Ω
Multi-function relay output terminal	4 units (Normally Open/ Normally Close)	1. User-defined functions 2. 3A(N.O.)/3A(N.C.) 250V _{AC} 5A(N.O.)/3A(N.C.) 30V _{DC} (min. 5V _{DC} , 10mA)
Output frequency terminal (MO)	2 units	1. User-defined functions 2. Max. 48V _{DC} 50mA
Analog output terminal (AFM)	2 units	1. User-defined functions 2. Max. load: 5k Ω 3. Output current: Max. 2mA 4. Resolution : 0 ~ 10V corresponds to the Max. operation frequency 5. Range: 0 ~ 10V $\rightarrow$ -10 ~ +10V
Safety Torque Off terminal (STO)	2 units	1. Power removal safety function for EN954-1 and IEC/EN61508 2. Factory setting of E24V/STO1/STO2 are short-circuit. 3. Factory setting of SCM1/SCM2/DCM are short-circuit. 4. When STO1 ~ SCM1; STO2 ~ SCM2 is activated, the activation current is 3.3mA $\geq$ 11V _{DC}
Serial communication ports	2 units	1. CAN communication 2. MODBUS communication
USB port	1 unit	1. Programming / host computer controlling

Wiring

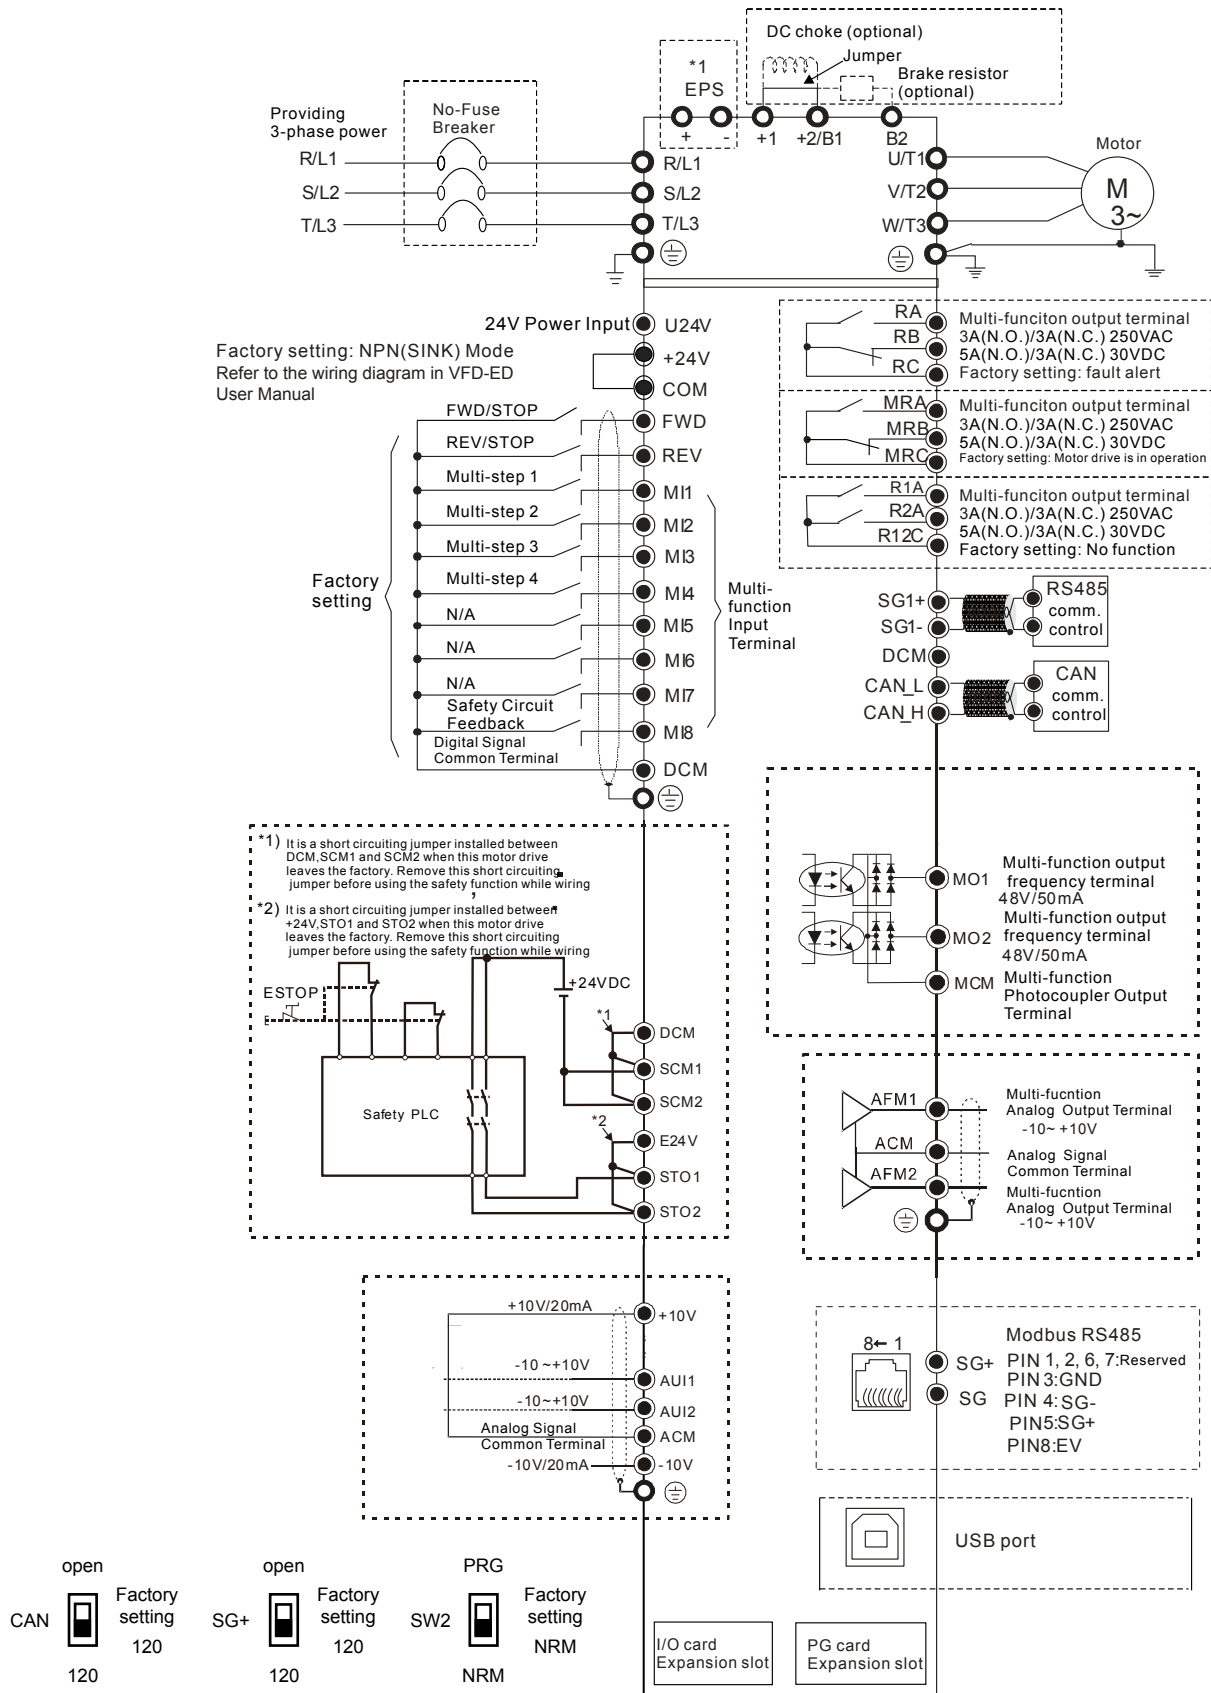

Specifications

Model Name

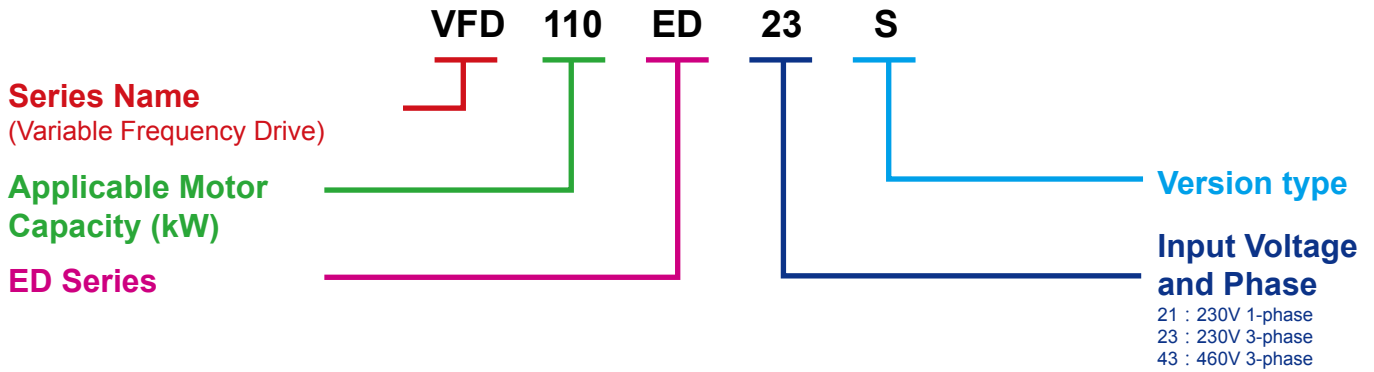

Frame Size		230V										
		B			C			D			E	
Model VFD-__ED23/21S		022*	037*	40	55	75	110	150	185	220	300	370
Applicable Motor Output (KW)		2.2	3.7	4	5.5	7.5	11	15	18.5	22	30	37
Applicable Motor Output (HP)			5	5	7.5	10	15	20	25	30	40	50
Output Rating	Rated Output Capacity (KVA)	4.8	6.8	7.9	9.5	12.5	19	25	29	34	46	55
	Rated Output Current (A)	12.0	17	20.0	24.0	30.0	45.0	58.0	77.0	87.0	132.0	161.0
	Maximum Output Voltage (V)	3-phase Proportional to Input Voltage										
	Output Frequency	0.00 ~ 400Hz										
	Carrier Frequency	2 ~ 15kHz										2 ~ 9kHz
	Rated Output Maximum Carrier Frequency	8kHz			10kHz			8kHz			6kHz	
Input Rating	Input Current (A)	24	34	20	23	30	47	56	73	90	132	161
	Rated Voltage / Frequency	1-phase 200 ~ 240V 50/60Hz			3-phase 200 ~ 240V 50/60Hz							
	Voltage Tolerance	±10% (180 ~ 264V)										
	Frequency Tolerance	±5% (47 ~ 63Hz)										
Cooling Method		Fan cooling										
Weight (kg)		6	6	6	8	10	10	13	13	13	36	36

*VFD022ED21S & VFD037ED21S are single phase model

Frame Size		460V											
		B	C					D		E			
Model VFD-__ED43S		40	55	75	110	150	185	220	300	370	450	550	750
Applicable Motor Power (KW)		4	5.5	7.5	11	15	18.5	22	30	37	45	55	75
Applicable Motor Power (HP)		5	7.5	10	15	20	25	30	40	50	60	75	100
Output Rating	Rated Output Capacity (KVA)	9.2	10.4	13.5	18.3	24	30.3	36	46.2	63.7	80	96.4	116.3
	Rated Output Current (A)	11.5	13	17	23	30	38	45	58	80	100	128	165
	Maximum Output Voltage (V)	3-phase 380 ~ 480V, 50/60Hz											
	Output Frequency	0.00 ~ 400Hz											
	Carrier Frequency	2 ~ 15kHz								2 ~ 9kHz		2 ~ 6kHz	
	Rated Output Maximum Carrier Frequency	8kHz	10kHz			8kHz			6kHz				
Input Rating	Rated Input Current (A)	11.5	14	17	24	30	37	47	58	80	100	128	165
	Rated Voltage	3-phase 380 ~ 480V, 50/60Hz											
	Voltage Tolerance	±10% (342 ~ 528V)											
	Frequency Tolerance	±5% (47 ~ 63Hz)											
Cooling Method		Fan cooling											
Weight (kg)		6	8	10	10	10	10	13	14.5	36	36	50	50

The measure of input and output current is influenced by the power supply, input reactor, wiring cables and the power supply impedance applied to the AC motor drive.




General Specifications

Protection Characteristics	Control Method	1: V/F, 2: VF+PG, 3: SVC, 4: FOC+PG, 5: TQC+PG, 6: FOC+PM
	Starting Torque	Reach up to 150% or above at 0.5Hz. Under FOC+PG or FOC+PM mode, starting torque can reach 150% at 0Hz.
	Speed Control Range	1:100 (up to 1:1000 when using PG card)
	Speed Control Resolution	±0.5% (up to ±0.02% when using PG card)
	Speed Response Ability	5Hz (Up to 30Hz for vector control)
	Max. Output Frequency	0.00 to 400Hz
	Output Frequency Accuracy	Digital Command 0.005%, Analog Command 0.5%
	Frequency Setting Resolution	Digital Command 0.01Hz, Analog Command: 1/4096 (12 bit) of the max. output frequency.
	Torque Limit	Max. is 190% torque current
	Torque Accuracy	±5%
	Accel/Decel Time	0.00 ~ 600.00 seconds
	V/F Curve	Adjustable V/F curve using 4 independent points and square curve.
	Frequency Setting Signal	±10V
Protection Characteristics	Motor Protection	Electronic thermal relay protection.
	Over-current Protection	Over-current protection for 250% rated current Current clamp for 190% rated current
	Ground Leakage Current Protection	Higher than 50% rated current
	Overload Ability	Constant torque: 150% for 60 seconds, variable torque: 190% for 5 seconds
	Over-voltage Protection	Over-voltage level: $V_{DC} > 400/800V$; low-voltage level: $V_{DC} < 200/400V$
	Over-voltage Protection for the Input Power	Varistor (MOV)
	Over-temperature Protection	Built-in temperature sensor
Environment	Protection Level	NEMA 1/IP20
	Operation Temperature	-10°C~ 40°C, Up to 50°C under derating operation
	Storage Temperature	-20°C~ 60°C
	Ambient Humidity	Below 90% RH (non- condensing)
	Vibration	1.0G less than 20Hz, 0.6G at 20 ~ 60Hz
	Installation Location	Altitude 1,000m or lower, keep from corrosive gasses, liquid and dust.
	Power System	TN System ^{*1 *2}
Certifications		  (UL mark excludes VFD022ED21S and VFD037ED21S)

^{*1} TN System: The neutral point of the power system is connected to the ground directly. The metal components that are exposed in the air are connected to the ground via a protective earth conductor.
^{*2} Single phase models use single phase three wire power system.

Dimensions

■ Frame B

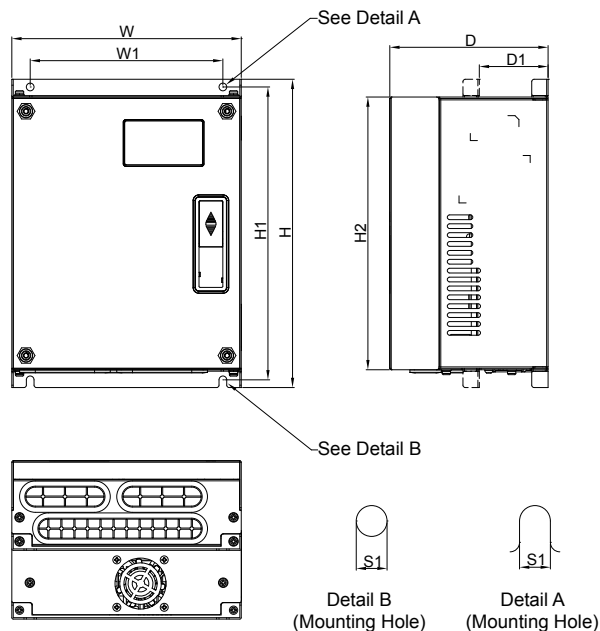


MODEL

VFD022ED21S VFD040ED43A
VFD037ED21S
VFD040ED23S

Frame		W	W1	H	H1	H2	D	D1*	S1
B	mm	193.5	162.5	260.0	247.0	230.0	133.5	58.0	6.5
	inch	7.60	6.39	10.22	9.71	9.04	5.25	2.28	0.26

*D1: This dimension is for flange mounting application reference.

■ Frame C

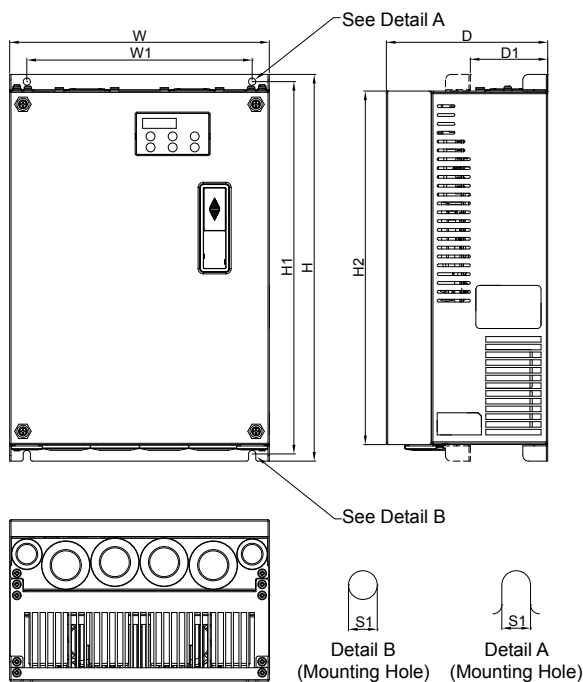

MODEL

VFD055ED23S VFD055ED43S
VFD075ED23S VFD075ED43S
VFD110ED23S VFD110ED43S
VFD150ED43S
VFD185ED43S


Frame		W	W1	H	H1	H2	D	D1*	S1
C	mm	235.0	204.0	350.0	337.0	320.0	146.0	70.0	6.5
	inch	9.25	8.03	13.78	13.27	15.60	5.75	2.76	0.26

*D1: This dimension is for flange mounting application reference.

■ Frame D

MODEL

VFD150ED23S VFD220ED43S
VFD185ED23S VFD300ED43S
VFD220ED23S

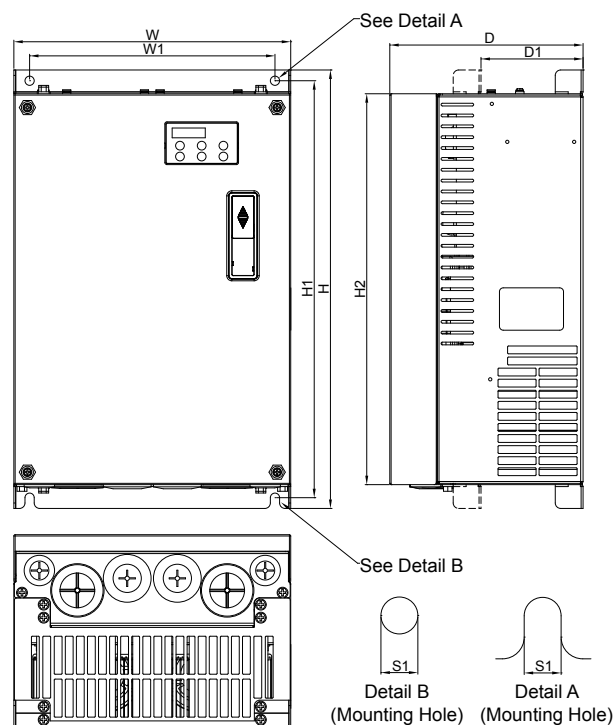


Frame		W	W1	H	H1	H2	D	D1*	S1
D	mm	255.0	226.0	403.8	384.0	360.0	178.0	94.0	8.5
	inch	10.4	8.9	15.9	15.12	14.17	7.01	3.70	0.33

*D1: This dimension is for flange mounting application reference.

■ Frame E

MODEL

VFD220ED43S VFD370ED43S
VFD300ED43S VFD450ED43S
VFD550ED43S
VFD750ED43S

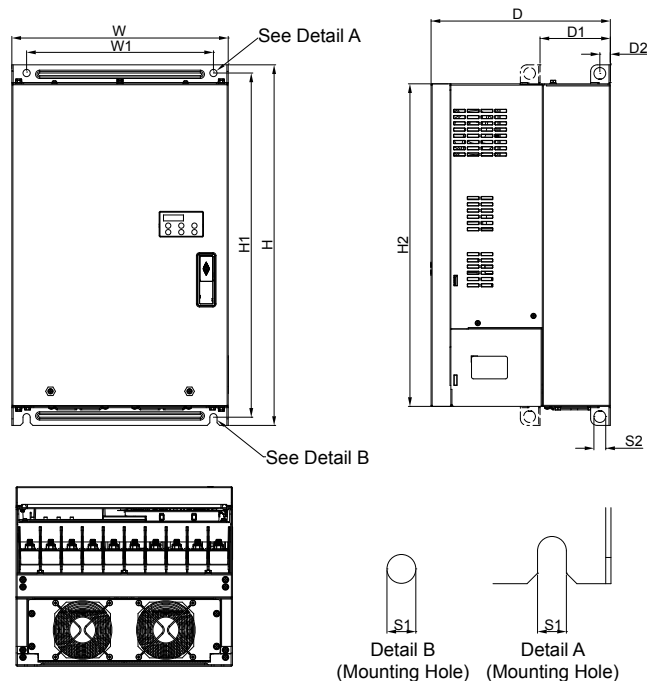

Frame		W	W1	H	H1	H2	D	D1*	D2	S1	S2
E	mm	330.0	285.0	550.0	525.0	492.0	273.4	107.2	16.0	11.0	18.0
	inch	12.99	11.22	21.65	20.67	19.37	10.76	4.22	0.63	0.43	0.71

*D1: This dimension is for flange mounting application reference.

Accessories

■ PG Card (EMED-PGAB)

Supports open-collector, line driver and UVW encoder signal

	Terminals	Descriptions
	VP	Output power of encoder Output voltage: +5V/+12V (determined by SW1) Maximum output current: 200mA
	0V	Power source common for encoder
	A, /A, B, /B, Z, /Z	Incremental encoder signal input Line driver input complies to the RS422 standard Single-phase input of +12V open collector signal (can be set by SW2) Maximum input frequency: 100kHz
	U, /U, V, /V, W, /W	Hall sensor signal input Maximum input frequency: 50kHz
	SW1, SW2	Encoder voltage: +5V/12V Input encoder signal: Open-collector or Line Driver

■ PG Card (EMED-PGHSD-1)

Supports Heidenhain ERN1387/ECN1313, SICK HIPERFACE

	Terminals	Descriptions
	Vin	Port for voltage input (for adjusting the value of voltage amplitude from push-pull pulse output) Maximum input voltage: 24 V _{DC}
	GND	Power source common for encoder
	A/O, B/O	Push-pull pulse output signal Maximum output frequency: 50kHz
	AO, /AO, BO, /BO	Line driver pulse output signal Maximum output frequency: 100kHz
	D-SUB Connector (J3)	Encoder signal input Support Heidenhain ERN1387 encoder Heidenhain EnDat 2.1 SICK HIPERFACE
	SW1 SW2	Switch between output IN.P/EX.P Switch between encoder power 5V/8V

■ PG Card (EMED-PGABD-1)

Supports open-collector, differential, UVW signal and frequency divider output

	Terminals	Descriptions
	Vin	Port for voltage input, to adjust the amplitude of output voltage at terminal A/O and terminal B/O.
	GND	Common ground terminal connecting to the host controller and the motor drive.
	A/O, B/O	Output signal of the push-pull frequency divider Factory setting: Output amplitude is about +24V. Use SW2 to cut off the internal default power. Input required power (i.e. output voltage's amplitude) Max. output frequency: 100kHz Frequency dividing range: 1 ~ 31Hz
	AO, /AO, BO, /BO	Line driver pulse output signal Maximum output frequency: 150kHz Frequency dividing range: 1 ~ 31Hz
	VP	Power output of encoder Note: Use SW1 to set up output voltage Voltage: +5V±0.5V or +12V±1V Current: Max. 200mA
	0V	Common power terminal of encoder
	A, $\bar{A}$, B, $\bar{B}$, Z, $\bar{Z}$	Incremental encoder signal input (differential motion, voltage, push-pull, open-collector) Note: Different input signal needs different wiring method. See user manual for wiring diagrams. Maximum input frequency: 150kHz
	U, $\bar{U}$, V, $\bar{V}$, W, $\bar{W}$	Absolute encoder signal input (differential motion, voltage, push-pull, open-collector) Note: Different input signal needs different wiring method. See user manual for wiring diagrams. Maximum input frequency: 150kHz
	SW1	Switch between encoder power 5V/12V
	SW2	Switch between OPEN-C/LINE-D
	SW3	Switch between output IN.P/EX.P

Accessories



KPC-C01

- High illuminated LCD display
- MODBUS RS-485
- Supporting languages:
 - English
 - Traditional Chinese
 - Simplified Chinese

Ordering Information

Frame		Applicable Models		
			230V	460V
Frame B		230V: 2.2kW ~ 4kW 460V: 4kW	VFD022ED21S VFD037ED21S VFD040ED23S	VFD040ED43S
Frame C		230V: 5.5kW ~ 11kW 460V: 5.5kW ~ 18.5kW	VFD055ED23S VFD075ED23S VFD110ED23S	VFD055ED43S VFD075ED43S VFD110ED43S VFD150ED43S VFD185ED43S
Frame D		230V: 15kW ~ 22kW 460V: 22kW ~ 30kW	VFD150ED23S VFD185ED23S VFD220ED23S	VFD220ED43S VFD300ED43S
Frame E		230V: 30kW ~ 37kW 460V: 37kW ~ 75kW	VFD300ED23S VFD370ED23S	VFD370ED43S VFD450ED43S VFD550ED43S VFD750ED43S

Global Operations

ASIA (Taiwan)



Taoyuan Technology Center (Green Building)



Taoyuan Plant 1



Taoyuan Plant (Diamond-rated Green Building)

ASIA (China)



Wujiang Plant 3



Delta Electronics

▲ Factories 4

Sales Channels of Delta Industrial Automation are Located Worldwide in 74 Countries





4
 
 Branch Offices 71


 R&D Centers 5


 Distributors 711

tries

Russia





Smarter. Greener. Together.

Industrial Automation Headquarters

Delta Electronics, Inc.

Taoyuan Technology Center
No.18, Xinglong Rd., Taoyuan City,
Taoyuan County 33068, Taiwan
TEL: 886-3-362-6301 / FAX: 886-3-371-6301

Asia

Delta Electronics (Jiangsu) Ltd.

Wujiang Plant 3
1688 Jiangxing East Road,
Wujiang Economic Development Zone
Wujiang City, Jiang Su Province,
People's Republic of China (Post code: 215200)
TEL: 86-512-6340-3008 / FAX: 86-769-6340-7290

Delta Greentech (China) Co., Ltd.

238 Min-Xia Road, Pudong District,
ShangHai, P.R.C.
Post code : 201209
TEL: 86-21-58635678 / FAX: 86-21-58630003

Delta Electronics (Japan), Inc.

Tokyo Office
2-1-14 Minato-ku Shibadaimon,
Tokyo 105-0012, Japan
TEL: 81-3-5733-1111 / FAX: 81-3-5733-1211

Delta Electronics (Korea), Inc.

1511, Byucksan Digital Valley 6-cha, Gasan-dong,
Geumcheon-gu, Seoul, Korea, 153-704
TEL: 82-2-515-5303 / FAX: 82-2-515-5302

Delta Electronics Int'l (S) Pte Ltd

4 Kaki Bukit Ave 1, #05-05, Singapore 417939
TEL: 65-6747-5155 / FAX: 65-6744-9228

Delta Electronics (India) Pvt. Ltd.

Plot No 43 Sector 35, HSIIDC
Gurgaon, PIN 122001, Haryana, India
TEL : 91-124-4874900 / FAX : 91-124-4874945

Americas

Delta Products Corporation (USA)

Raleigh Office
P.O. Box 12173, 5101 Davis Drive,
Research Triangle Park, NC 27709, U.S.A.
TEL: 1-919-767-3800 / FAX: 1-919-767-8080

Delta Greentech (Brasil) S.A

Sao Paulo Office
Rua Itapeva, 26 - 3° andar Edificio Itapeva One-Bela Vista
01332-000-São Paulo-SP-Brazil
TEL: +55 11 3568-3855 / FAX: +55 11 3568-3865

Europe

Delta Electronics (Netherlands) B.V.

Eindhoven Office
De Witbogt 15, 5652 AG Eindhoven, The Netherlands
TEL: +31 (0)40-8003800 / FAX: +31 (0)40-8003898

*We reserve the right to change the information in this catalogue without prior notice.