


overview

- break function (NC) mechanical
- cable, 2 m
- -20 ... 75 °C
- IP 50

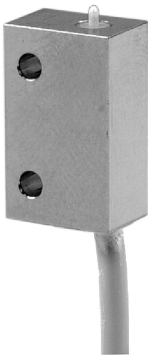

Technical data


general data		electrical data	
repeat accuracy	< 0,001 mm	output circuit	break function (NC) mechanical
activating force	75 cN	mechanical data	
mech. pre-run / overrun	- / 1,5 mm approx.	activating pin	zirconium oxide ZrO ₂
measurement type	contact with medium	housing material	brass nickel plated
direction of approach	frontal	dimension	8 mm
electrical data		type	rectangular
DC voltage max.	15 VDC	housing length	20 mm
switch. current DC max.	2 mA	connection types	cable, 2 m
AC voltage max.	24 VAC	ambient conditions	
switch. current AC max.	50 mA	operating temperature	-20 ... +75 °C
		protection class	IP 50

MY-COM C75/200

My-Com precision switches

Article number: 10215325

dimension drawing

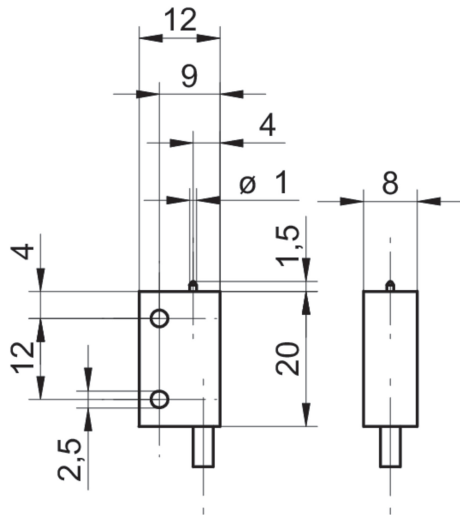

connection diagram

