Baumer
Passion for Sensors

My-Com precision switches

MY-COM E75P/200/L

My-Com precision switches

Article number: 10241446

overview

- PNP make function (NO)
- cable, 2 m
- -20 … 75 °C
- IP 50

Technical data

general data	
repeat accuracy	< 0,001 mm
activating force	75 cN
mech. pre-run / overrun	- / 0,8 ... 1,5 mm approx.
measurement type	contact with medium
direction of approach	frontal and lateral approach
output indicator	LED red
electrical data	
voltage supply range +Vs	5 … 36 VDC
load current max. at 24 VDC	50 mA
output circuit	PNP make function (NO)

electrical data	
load resistance min.	480 Ohm
mechanical data	
activating pin	hardened steel
housing material	brass nickel plated
dimension	6 mm
type	cylindrical threaded
housing length	47 mm
connection types	cable, 2 m
ambient conditions	
operating temperature	-20 … +75 °C
protection class	IP 50

2019-10-10 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

ПРОМЭЛЕКТРОНИКА / sales@prom-elec.com

MY-COM E75P/200/L

My-Com precision switches

Article number: 10241446

dimension drawing

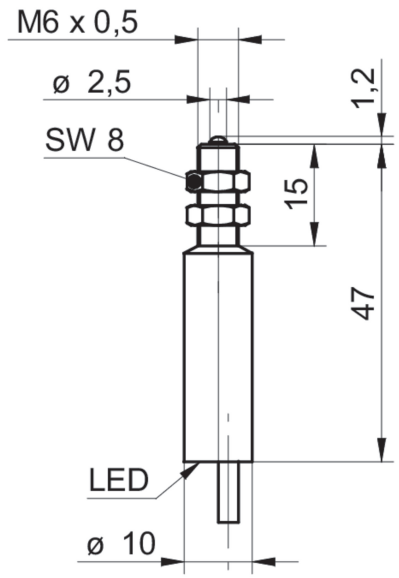

connection diagram

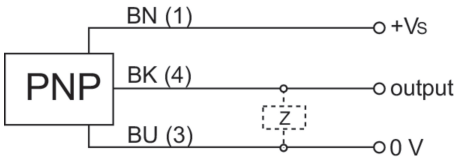

2019-10-10 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.