

overview

- SmartReflect - Safe barrier principle without reflector
- Baumer PinPoint LED: Small, homogeneous light spot with sharp edges
- Long-term stable detection of transparent objects thanks to compensation of environmental influences
- Manipulation-proof, simple teach-in via qTeach or line teach
- IO-Link for extended parameterization options and additional diagnostic data
- Robust housing with stainless steel spacer sleeves



Technical data

general data

type	light barrier
version	transparency object detection
light source	pulsed PinPoint LED
background position Sde	15 ... 180 mm
scanning range Sa	90% ... 85% Sde
minimal signal attenuation	5 %
alignment / soiled lens indicator	flashing output indicator
power on indication	LED green
output indicator	LED yellow
sensing distance adjustment	Teach-in and IO-Link
wave length	644 nm
suppression of reciprocal influence	yes
beam type	point
alignment optical axis	< 1,5°

electrical data

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	40 mA (@ 10 VDC)
current consumption typ.	16 mA (@ 24 VDC)
voltage drop Vd	< 2 VDC
output function	light / dark operate
output circuit	push-pull

electrical data

output current	< 50 mA
short circuit protection	yes
reverse polarity protection	yes

communication interface

baud rate	230,4 kBaud (COM 3)
adjustable parameters	switching point switching hysteresis time filters LED status indicators output logic counter operation mode deactivate the sensor element Find Me function Teach-in mode background tracking

IO-Link port type	Class A
process data length	32 Bit
process data structure	Bit 0 = SSC1 (presence) Bit 2 = quality Bit 3 = alarm Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement

interface	IO-Link V1.1
-----------	--------------

additional data	signal attenuation excess gain operating cycles device temperature
-----------------	---

Technical data

communication interface

cycle time	$\geq 0,6 \text{ ms}$
------------	-----------------------

mechanical data

width / diameter	8 mm
height / length	25,1 mm
depth	15,8 mm
type	rectangular
mechanical mounting	sleeve smooth (stainless steel)


mechanical data

housing material	plastic (ASA, PMMA)
front (optics)	PMMA
connection types	cable 4 pin, 2 m
cable characteristics	PVC / PVC 4 x 0,08 mm ²


ambient conditions

operating temperature	-25 ... +50 °C
protection class	IP 67

dimension drawing

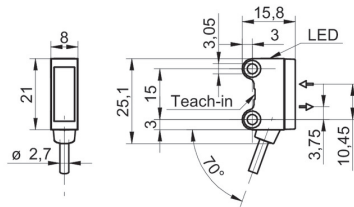

connection diagram

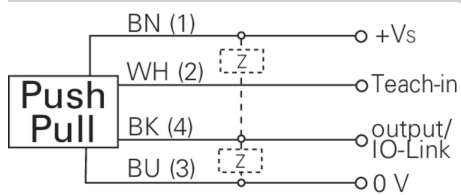

beam characteristic (typically)

