

O200.ZR-GW2I.72NV/A014_E026_H006

Article number: 11231269

overview

- Reliable intensity-based object detection
- IO-Link interface independent of the switching output (Dual Channel)
- Extended parameterization options and additional diagnostic data
- Quick mounting by means of M3 threaded bushes made of stainless steel



Picture similar



Technical data

general data	
type	intensity difference
version	IO-Link dual channel
light source	pulsed red LED
sensing distance Tw	20 ... 200 mm
smallest object recognizable typ.	2 mm at 100 mm
alignment / soiled lens indicator	flashing output indicator
power on indication	LED green
output indicator	LED yellow
sensing distance adjustment	IO-Link
wave length	644 nm
suppression of reciprocal influence	yes
beam type	point
alignment optical axis	< 1,5°
electrical data	
response time / release time	< 0,4 ms
jitter	< 0,21 ms
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	45 mA (@ 10 VDC)
current consumption typ.	16 mA (@ 24 VDC)

electrical data	
voltage drop Vd	< 2 VDC
output function	light / dark operate
output circuit	push-pull
output current	< 50 mA
short circuit protection	yes
reverse polarity protection	yes
communication interface	
baud rate	38,4 kBaud (COM 2)
adjustable parameters	switching point time filters LED status indicators output logic output circuit counter deactivate the sensor element Find Me function Teach-in mode
IO-Link port type	Class A
process data length	32 Bit
process data structure	Bit 0 = SSC1 (presence) Bit 2 = quality Bit 3 = alarm Bit 5 = SSC4 (counter) Bit 16-31 = 16 Bit measurement
interface	IO-Link V1.1

Technical data

communication interface

additional data	signal strength excess gain operating cycles device temperature
cycle time	≥ 2,7 ms

mechanical data

width / diameter	8 mm
height / length	25,1 mm
depth	15,8 mm
type	rectangular


mechanical data

mechanical mounting	threaded sleeves M3 (stainless steel)
housing material	plastic (ASA, PMMA)
front (optics)	PMMA
connection types	flylead connector M8 4 pin, L=200 mm
cable characteristics	PVC / PVC 4 x 0,08 mm ²


ambient conditions

operating temperature	-25 ... +50 °C
protection class	IP 67


dimension drawing

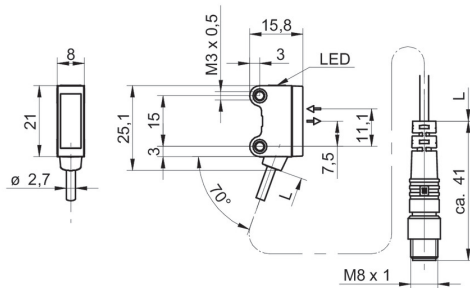


connection diagram

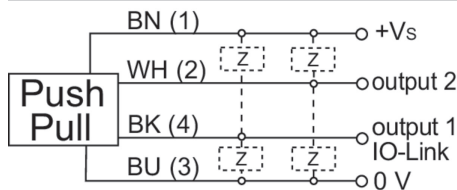

pin assignment

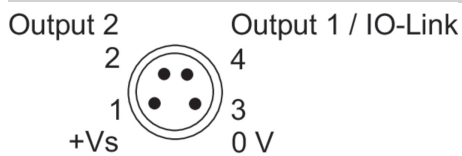

beam characteristic (typically)

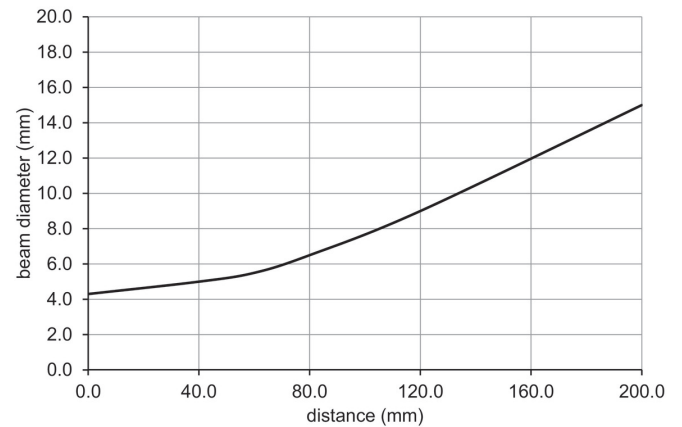

relative receiving signal

