

overview

- Most reliable object detection through barrier principle
- Flexible parameterization and additional diagnostic data thanks to IO-Link
- High performance in compact housing



Picture similar



Technical data

general data

scanning range Sd	0 ... 500 mm
reflector position Sde	0 ... 500 mm
adjusting range reflector (operating range)	± 2,5 % Sde
adjusting range reflector (limit range)	± 5 % Sde
version	IO-Link
repeat accuracy	< 0,5 mm
response time ton/toff min	< 16 ms
response time ton/toff standard	< 40 ms
temperature drift	< 2 % Sde
power-up drift	compensated after 15 min.
sonic frequency	290 kHz
adjustment	qTeach, line-Teach, IO-Link
alignment aid	light indicator flashing
light indicator	LED yellow
power on indication	LED green
alignment measuring axis	< 2°

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption typ.	35 mA
output circuit	push-pull
output current	< 100 mA
voltage drop Vd	< 3 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

communication interface

interface	IO-Link V1.1
-----------	--------------

communication interface

baud rate	38,4 kBaud (COM 2)
cycle time	≥ 8 ms
process data length	32 Bit
process data structure	Bit 0 = SSC1 (distance) Bit 1 = SSC2 (distance) Bit 2 = quality Bit 3 = alarm Bit 5 = SSC4 (counter) Bit 8-15 = scale factor Bit 16-47 = 32 Bit measurement

IO-Link port type

additional data

Class A
distance
excess gain
operating cycles
operating hours
boot cycles
operating voltage
device temperature
histograms
adjustable parameters
time filters
LED status indicators
output logic
output circuit
counter
beam forming
deactivate the sensor element
Find Me function

mechanical data

type	rectangular
housing material	plastic (ASA, PMMA)
width / diameter	12,9 mm
height / length	32,2 mm
depth	23 mm

Technical data

mechanical data

connection types connector M8 4 pin

ambient conditions


operating temperature -25 ... +65 °C

ambient conditions


storage temperature -40 ... +75 °C

protection class IP 67


dimension drawing

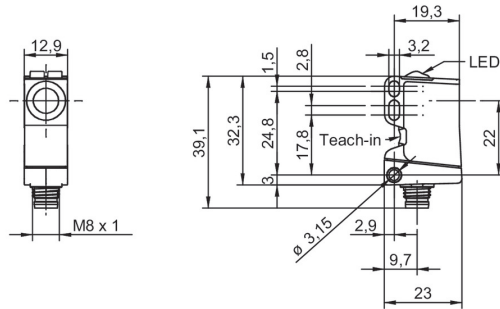

typical sonic cone profile

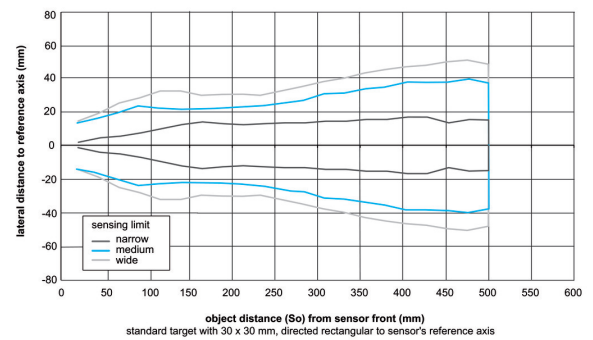

connection diagram

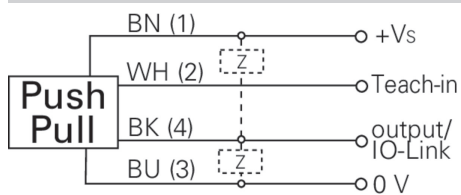

pin assignment

