IXYS
INTEGRATED CIRCUITS DIVISION



CPC2017N
60V Dual Normally-Open Single-Pole 8-Pin SOIC OptoMOS® Relay

Parameter	Rating	Units
Blocking Voltage	60	V_P
Load Current	120	mA_{rms} / mA_{DC}
On-Resistance (max)	16	Ω
LED Current to operate	1	mA

Features
- Designed for use in Security Systems Complying with EN50130-4
- 1500V_{rms} Input/Output Isolation
- Arc-Free With No Snubbing Circuits
- No EMI/RFI Generation
- Immune to Radiated EM Fields
- Wave Solderable
- Tape & Reel Version Available
- Small 8-Pin SOIC Package

Applications
- Security
  - Passive Infrared Detectors (PIR)
  - Data Signalling
  - Sensor Circuitry
- Instrumentation
  - Multiplexers
  - Data Acquisition
  - Electronic Switching
  - I/O Subsystems
- Medical Equipment—Patient/Equipment Isolation
- Aerospace
- Industrial Controls

Description
The CPC2017N is a miniature device with two independent, normally-open (1-Form-A) solid state relays in an 8-pin SOIC package that employs optically coupled MOSFET technology to provide 1500V_{rms} of input to output isolation.

Optically coupled outputs that use the patented OptoMOS architecture are controlled by a highly efficient infrared LED.

The CPC2017N uses IXYS Integrated Circuits Division's state of the art, double-molded, vertical construction packaging to produce one of the world's smallest relays. The CPC2017N offers substantial board space savings over the competitor's larger 8-pin SOIC relay.

Approvals
- UL Recognized Component: File E76270
- CSA Approval Pending
- EN/IEC 60950-1 Certified Component: TUV Certificate B 13 12 82667 003

Ordering Information

Part #	Description
CPC2017N	8-Pin SOIC (50/tube)
CPC2017NTR	8-Pin SOIC (2000/reel)

Pin Configuration



Switching Characteristics of Normally-Open (Form-A) Devices

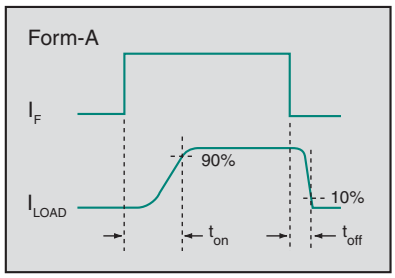

ПРОМЭЛЕКТРОНИКА / sales@prom-elec.com

Absolute Maximum Ratings @ 25ºC

Parameter	Ratings	Units
Blocking Voltage	60	V_P
Reverse Input Voltage	5	V
Input Control Current	50	mA
Peak (10ms)	1	A
Total Power Dissipation [1]	600	mW
Isolation Voltage, Input to Output	1500	V_{rms}
Operational Temperature	-40 to +85	°C
Storage Temperature	-40 to +125	°C

[1] Derate linearly 5mW / ºC

Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.

Typical values are characteristic of the device at +25°C, and are the result of engineering evaluations. They are provided for information purposes only, and are not part of the manufacturing testing requirements.

Electrical Characteristics @ 25ºC

Parameter	Conditions	Symbol	Min	Typ	Max	Units
Output Characteristics						
Load Current						
Continuous [1]	I_F=1mA	I_L	-	-	120	mA_{rms} / mA_{DC}
Peak	t =10ms	I_{LPK}	-	-	±350	mA_P
On-Resistance [2]	I_L=120mA	R_{ON}	-	7.1	16	Ω
Off-State Leakage Current	V_L=60V_P	I_{LEAK}	-	-	1	µA
Switching Speeds						
Turn-On	I_F=5mA, V_L=10V	t_{on}	-	1.25	3	ms
Turn-Off		t_{off}	-	0.45	3	
Output Capacitance	I_F=0mA, V_L=50V, f=1MHz	C_{OUT}	-	5	-	pF
Capacitance, Input to Output	V_{IO}=0V, f=1MHz	C_{IO}	-	1	-	pF
Input Characteristics						
Input Control Current to Activate [3]	I_L=120mA	I_F	-	0.40	1	mA
Input Control Current to Deactivate	-	I_F	0.1	0.35	-	mA
Input Voltage Drop	I_F=5mA	V_F	0.9	1.2	1.4	V
Reverse Input Current	V_R=5V	I_R	-	-	10	µA

[1] Load current derates linearly from 120mA @ 25ºC to 60mA @80ºC, and must be derated for both poles operating simultaneously.
[2] Measurement taken within 1 second of on-time.
[3] For applications requiring high temperature operation (greater than 60ºC) a minimum LED drive current of 3mA is recommended.

PERFORMANCE DATA @ 25°C (Unless Otherwise Noted)*

Typical LED Forward Voltage Drop (N=50, I_F=5mA)

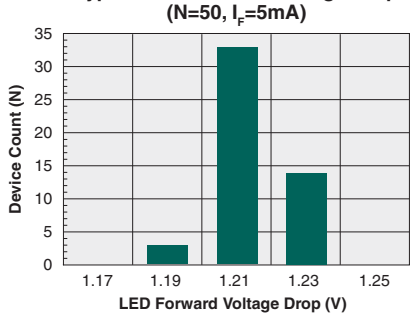

Typical Turn-On Time (N=50, I_F=5mA, I_L=120mA)

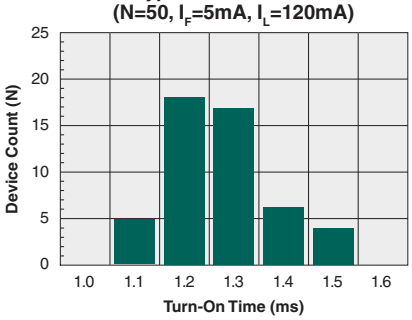

Typical Turn-Off Time (N=50, I_F=5mA, I_L=120mA)

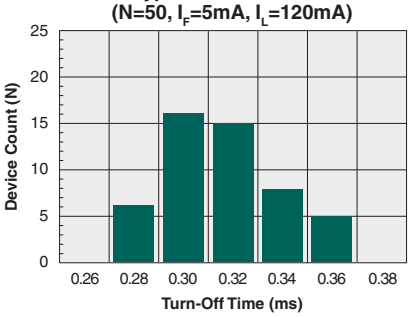

Typical I_F for Switch Operation (N=50, I_L=120mA)

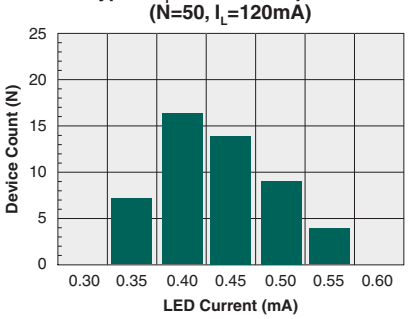

Typical I_F for Switch Dropout (N=50, I_L=120mA)

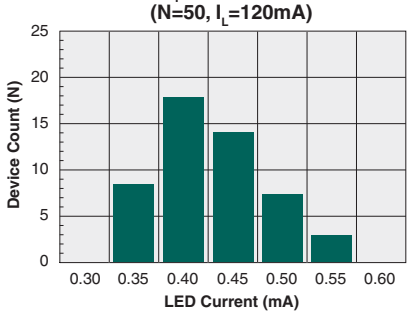

Typical On-Resistance Distribution (N=50, I_F=1mA, I_L=120mA)

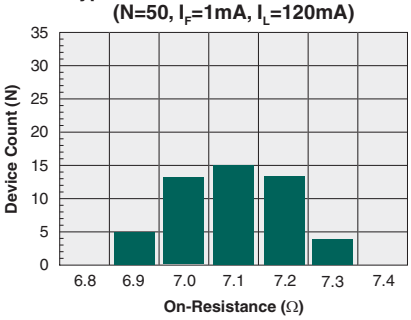

Typical Blocking Voltage Distribution (N=50)

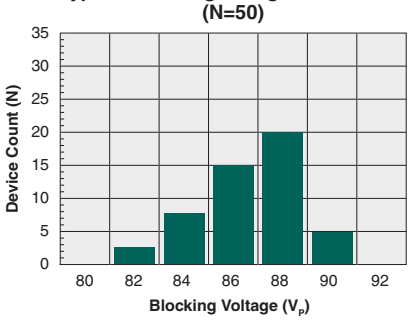

Typical LED Forward Voltage Drop vs. Temperature

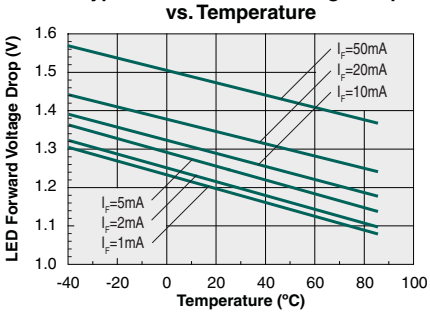

Typical Turn-On Time vs. LED Forward Current (I_L=120mA)

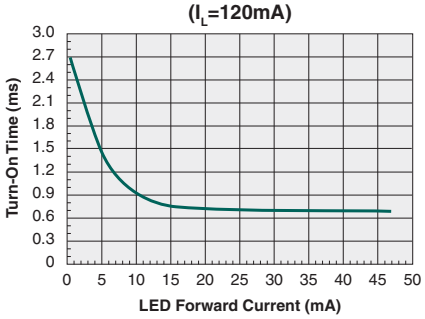

Typical Turn-Off Time vs. LED Forward Current (I_L=120mA)

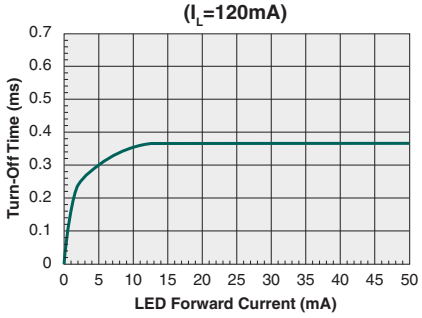

*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

PERFORMANCE DATA @ 25°C (Unless Otherwise Noted)*

Typical I_F for Switch Operation vs. Temperature (I_L=60mA)

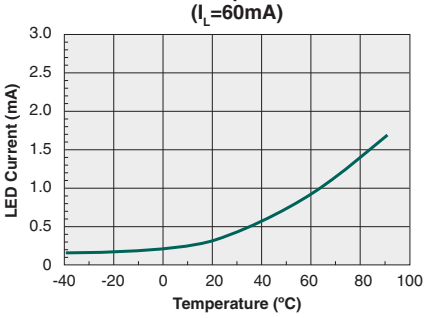

Typical Turn-On Time vs. Temperature (I_L=50mA)

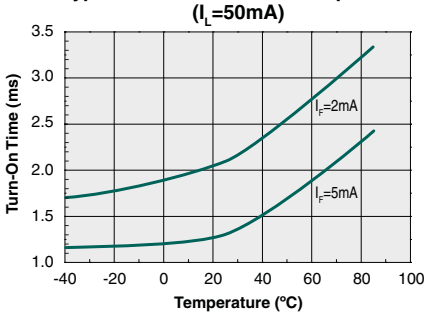

Typical Turn-Off Time vs. Temperature (I_L=50mA)

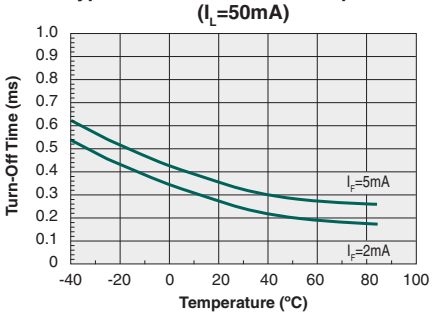

Typical On-Resistance vs. Temperature (I_L=60mA)

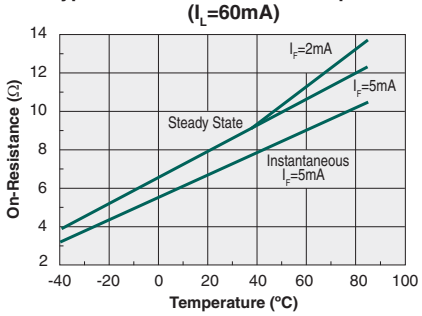

Typical Load Current vs. Load Voltage (I_F=1mA)

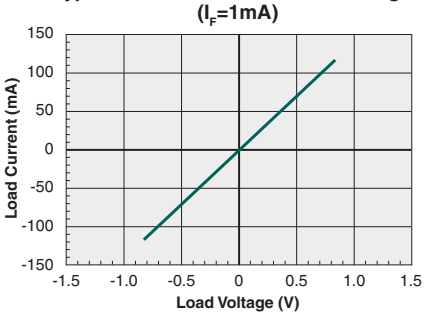

Maximum Load Current vs. Temperature (I_F=2mA)

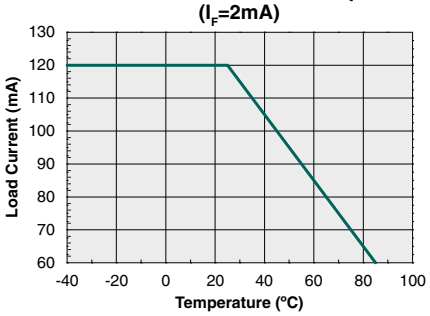

Typical Blocking Voltage vs. Temperature

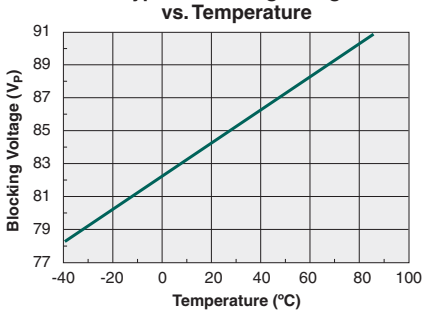

Typical Leakage vs. Temperature (Measured Across Pins 5&6, 7&8) (V_L=60V)

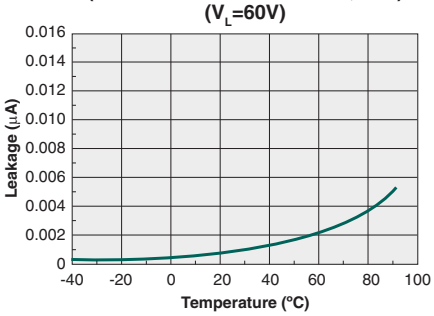

Output Capacitance vs. Load Voltage (I_F=0mA, f=1MHz)

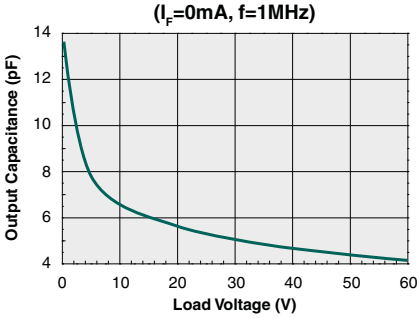

Energy Rating Curve

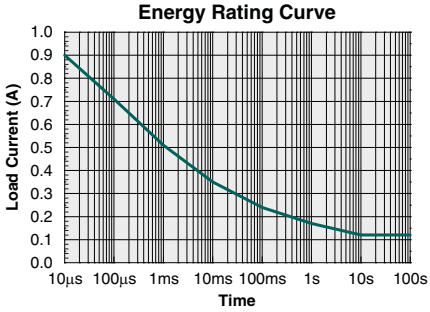

*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

Manufacturing Information

Moisture Sensitivity

All plastic encapsulated semiconductor packages are susceptible to moisture ingression. IXYS Integrated Circuits Division classified all of its plastic encapsulated devices for moisture sensitivity according to the latest version of the joint industry standard, **IPC/JEDEC J-STD-020**, in force at the time of product evaluation. We test all of our products to the maximum conditions set forth in the standard, and guarantee proper operation of our devices when handled according to the limitations and information in that standard as well as to any limitations set forth in the information or standards referenced below.

Failure to adhere to the warnings or limitations as established by the listed specifications could result in reduced product performance, reduction of operable life, and/or reduction of overall reliability.

This product carries a **Moisture Sensitivity Level (MSL) rating** as shown below, and should be handled according to the requirements of the latest version of the joint industry standard **IPC/JEDEC J-STD-033**.

Device	Moisture Sensitivity Level (MSL) Rating
CPC2017N	MSL 3

ESD Sensitivity

This product is **ESD Sensitive**, and should be handled according to the industry standard **JESD-625**.

Soldering Profile

This product has a maximum body temperature and time rating as shown below. All other guidelines of **J-STD-020** must be observed.

Device	Maximum Temperature x Time	Maximum Reflow Cycles
CPC2017N	260°C for 30 seconds	3

Board Wash

IXYS Integrated Circuits Division recommends the use of no-clean flux formulations. However, board washing to remove flux residue is acceptable. Since IXYS Integrated Circuits Division employs the use of silicone coating as an optical waveguide in many of its optically isolated products, the use of a short drying bake could be necessary if a wash is used after soldering processes. Chlorine- or Fluorine-based solvents or fluxes should not be used. Cleaning methods that employ ultrasonic energy should not be used.

MECHANICAL DIMENSIONS

CPC2017N

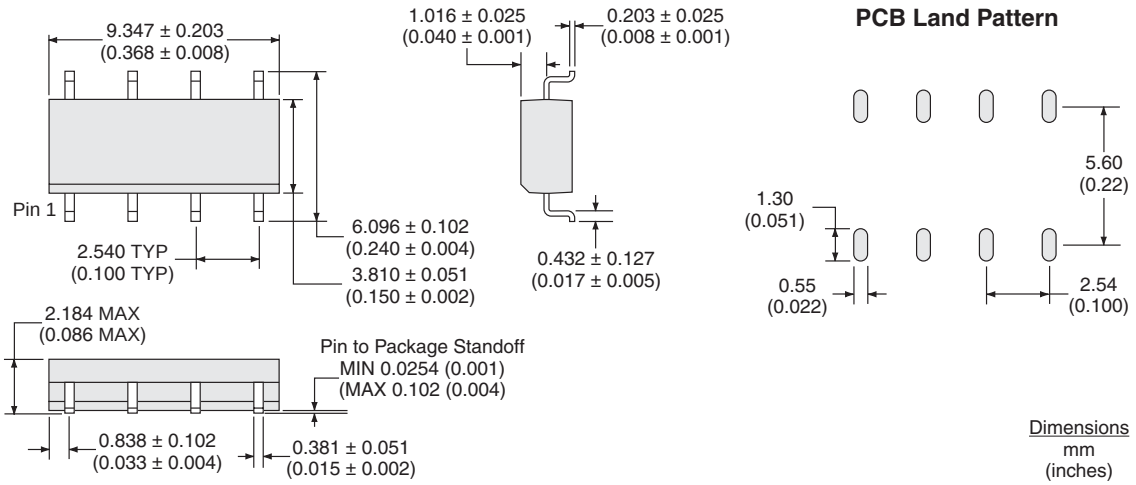

CPC2017NTR Tape & Reel

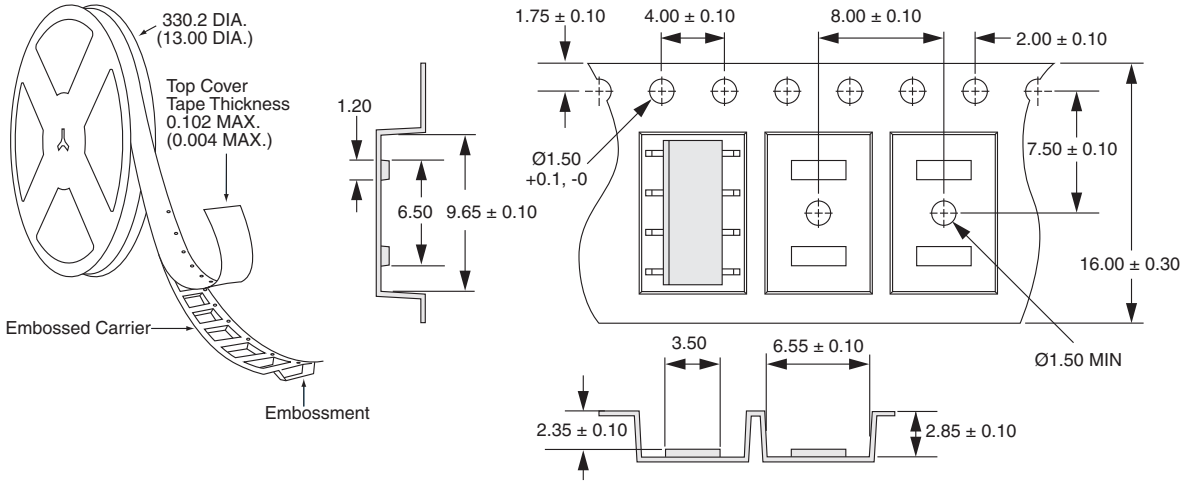

NOTES:
1. All dimensions in millimeters
2. 10 sprocket hole pitch cumulative tolerance ± 0.20.
3. Carrier camber is within 1mm in 250mm.
4. Tape material : Black Conductive Polystyrene Alloy.
5. All dimensions meet EIA-481-C requirements.
6. Thickness : 0.30 ± 0.05mm.

For additional information please visit our website at: www.ixysic.com

IXYS Integrated Circuits Division makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in IXYS Integrated Circuits Division's Standard Terms and Conditions of Sale, IXYS Integrated Circuits Division assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of IXYS Integrated Circuits Division's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. IXYS Integrated Circuits Division reserves the right to discontinue or make changes to its products at any time without notice.

Specification: DS-CPC2017N-R04
©Copyright 2014, IXYS Integrated Circuits Division
OptoMOS® is a registered trademark of IXYS Integrated Circuits Division
All rights reserved. Printed in USA.
11/18/2014

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

IXYS:
CPC2017N