

DIP8-pin type featuring  
low on-resistance with  
200V/400V load voltage

PhotoMOS<sup>®</sup>  
RF 2 Form A  
Low on-resistance (AQW22○N)

## FEATURES

1. 2-channels (Form A) type with high response speed, low leakage current and low on-resistance.

2. Applicable for 2 Form A use as well as two independent 1 Form A use

3. Low capacitance between output terminals ensures high response speed:

The capacitance between output terminals is small; typ. 10 pF. This enables for a fast operation speed of typ. 0.2 ms.

4. High sensitivity and low on-resistance:

Max. 0.07 A of load current can be controlled with input current of 5 mA.

The on-resistance is less than our conventional models.

5. Low-level off state leakage current


6. Controls low-level analog signals:

PhotoMOS features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.


## TYPICAL APPLICATIONS

• Measuring instruments

Scanner, IC checker, Board tester, etc.

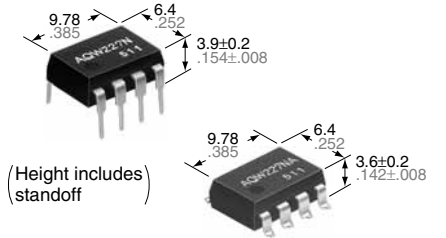

mm inch



RoHS compliant

## TYPES

	Output rating*		Package	Part No.				Packing quantity	
				Through hole terminal	Surface-mount terminal		Tube	Tape and reel	
	Load voltage	Load current			Tube packing style				Tape and reel packing style
					Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side			
AC/DC dual use	200 V	50 mA	DIP8-pin	AQW227N	AQW227NA	AQW227NAX	AQW227NAZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.
	400 V	40 mA		AQW224N	AQW224NA	AQW224NAX	AQW224NAZ		

\*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

## RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQW227N(A)	AQW224N(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA		
	LED reverse voltage	V <sub>R</sub>	5 V		
	Peak forward current	I <sub>FP</sub>	1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW		
Output	Load voltage (peak AC)	V <sub>L</sub>	200 V	400 V	
	Continuous load current	I <sub>L</sub>	0.05 A (0.07 A)	0.04 A (0.05 A)	Peak AC, DC ( ) : in case of using only 1 channel
	Peak load current	I <sub>peak</sub>	0.15 A	0.12 A	A connection: 100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	800 mW		
Total power dissipation		P <sub>T</sub>	850 mW		
I/O isolation voltage		V <sub>iso</sub>	1,500 V AC		
Temperature limits	Operating	T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F		Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F		

# RF 2 Form A Low on-resistance (AQW220N)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQW227N(A)	AQW224N(A)	Remarks
Input	LED operate current	Typical	I <sub>Fon</sub>	0.9 mA		I <sub>L</sub> = Max.
		Maximum		3.0 mA		
	LED turn off current	Minimum	I <sub>Foff</sub>	0.4 mA		I <sub>L</sub> = Max.
		Typical		0.8 mA		
LED dropout voltage	Typical	V <sub>F</sub>	1.25 V (1.14 V at I <sub>F</sub> = 5 mA)		I <sub>F</sub> = 50 mA	
	Maximum		1.5 V			
Output	On resistance	Typical	R <sub>ton</sub>	30 Ω	70 Ω	I <sub>F</sub> = 5 mA I <sub>L</sub> = Max. Within 1 s on time
		Maximum		50 Ω	100 Ω	
	Output capacitance	Typical	C <sub>out</sub>	10 pF		I <sub>F</sub> = 0 V <sub>B</sub> = 0 f = 1 MHz
		Maximum		15 pF		
Off state leakage current	Maximum	I <sub>LLeak</sub>	10 nA		I <sub>F</sub> = 0 V <sub>L</sub> = Max.	
Transfer characteristics	Turn on time*	Typical	T <sub>on</sub>	0.2 ms		I <sub>F</sub> = 5 mA I <sub>L</sub> = Max.
		Maximum		0.5 ms		
	Turn off time*	Typical	T <sub>off</sub>	0.08 ms		I <sub>F</sub> = 5 mA I <sub>L</sub> = Max.
		Maximum		0.2 ms		
	I/O capacitance	Typical	C <sub>iso</sub>	0.8 pF		f = 1 MHz V <sub>B</sub> = 0
		Maximum		1.5 pF		
Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	1,000 MΩ		500 V DC	

\*Turn on/Turn off time

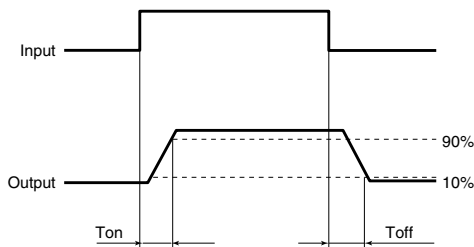

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I <sub>F</sub>	5	mA

### ■ For Dimensions.

### ■ For Schematic and Wiring Diagrams.

### ■ For Cautions for Use.

### ■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.


For more information.

## REFERENCE DATA

### 1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

When using 2 channels

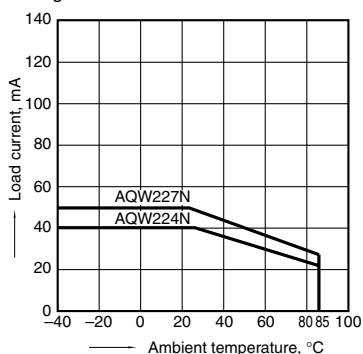


### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

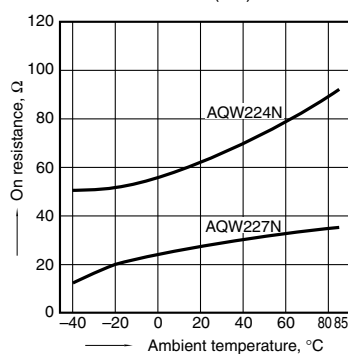

### 3. Turn on time vs. ambient temperature characteristics


LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

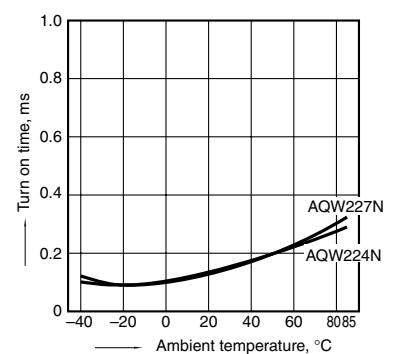

# RF 2 Form A Low on-resistance (AQW220N)


## 4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

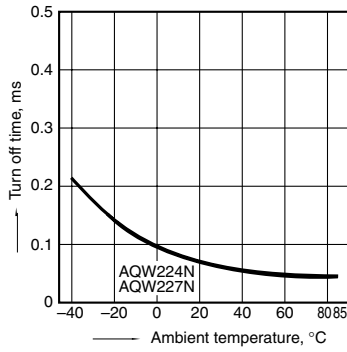


## 5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

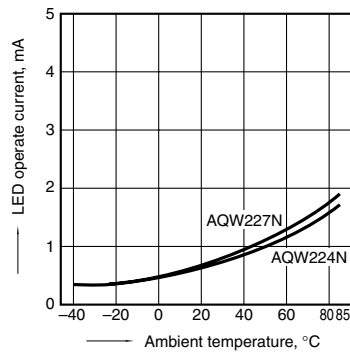


## 6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

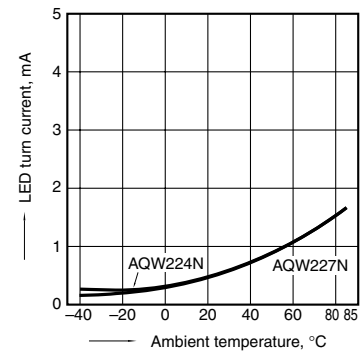


## 7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types; LED current: 5 to 50 mA

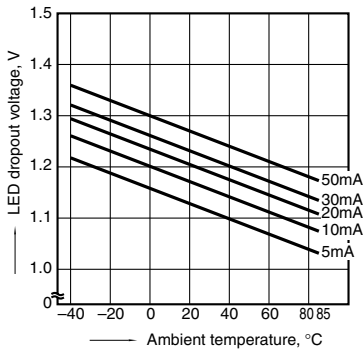


## 8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F




## 9. Off state leakage current

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

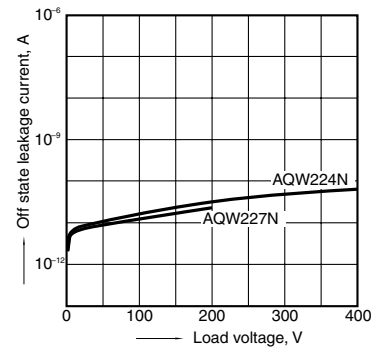


## 10. LED forward current vs. turn on time characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

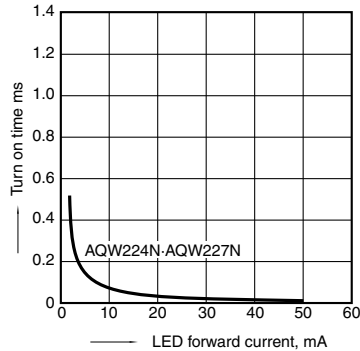


## 11. LED forward current vs. turn off time characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

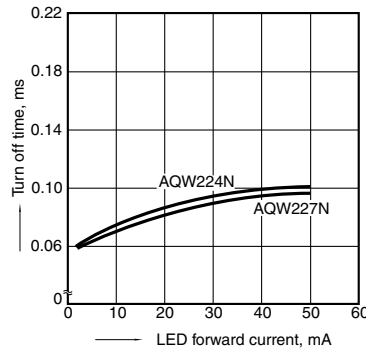


## 12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Frequency: 1 MHz, 30 mVrms; Ambient temperature: 25°C 77°F

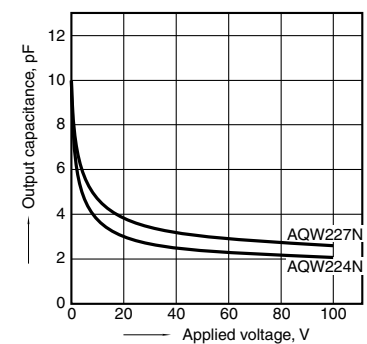


## 13. Isolation characteristics (50 Ω impedance)

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

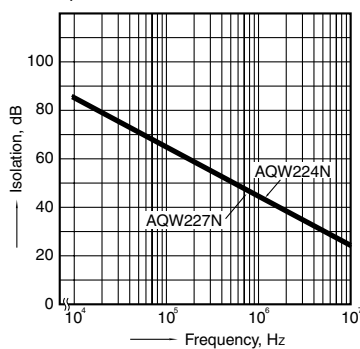

## 14. Insertion loss characteristics (50 Ω impedance)

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

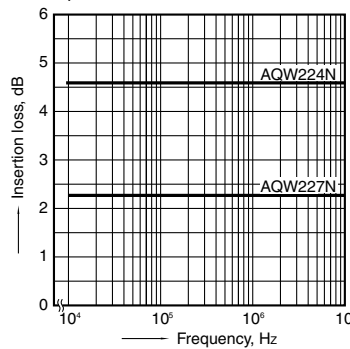

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[AQW225N](#) [AQW225NA](#) [AQW225NAX](#) [AQW225NAZ](#) [AQW225R2A](#)