# G3VM-6□G□/61VY□

**MOS FET Relays SOP 4-pin, General-purpose Type**

## General-purpose MOS FET Relays in SOP 4-pin packages for a wide range of applications

- **Contact form: 1a (SPST-NO) or 1b (SPST-NC)**
- **Load voltage: 60 V**

**RoHS Compliant**



**Note:** The actual product is marked differently from the image shown here.

## ■Application Examples

- **Semiconductor test equipment**
- **Test & Measurement equipment**
- **Communication equipment**
- **Security equipment**
- **Industrial equipment**
- **Power circuit**
- **Amusement equipment**

## ■Package (Unit : mm, Average)

SOP 4-pin

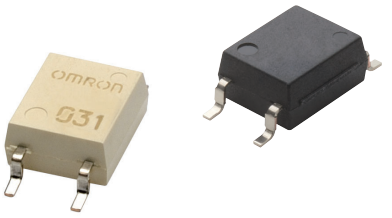


Special SOP 4-pin




**Note:** The actual product is marked differently from the image shown here.

## ■Model Number Legend

**G3VM-□□□□□**
**1 2 3 4 5**

**1. Load voltage**
6: 60 V

**2. Contact form**
1: 1a (SPST-NO)
3: 1b (SPST-NC)

**3. Package**
G: SOP 4-pin
V: Special SOP 4-pin

**4. Additional functions**
None: Dielectric strength between I/O 1500 V
Y: Dielectric strength between I/O 3750 V

**5. Other informations**
When specifications overlap, serial code is added in the recorded order.

## ■Ordering Information

| Package | Contact form | Terminals | Load voltage (peak value) ✻ | Continuous load current (peak value) ✻ | Stick packaging | | Tape packaging | |
|---|---|---|---|---|---|---|---|---|
| | | | | | Model | Minimum package quantity | Model | Minimum package quantity |
| SOP4 | 1a (SPST-NO) | Surface-mounting Terminals | 60 V | 400 mA | **G3VM-61G2** | 100 pcs. | **G3VM-61G2(TR)** | 2500 pcs. |
| | | | | | **G3VM-61G3** | | **G3VM-61G3(TR)** | |
| Special SOP 4-pin | | | | 100 mA | **G3VM-61VY1** | 125 pcs. | **G3VM-61VY1(TR)** | 3000 pcs. |
| | | | | 500 mA | **G3VM-61VY2** | | **G3VM-61VY2(TR05)** | 500 pcs. |
| | | | | | | | **G3VM-61VY2(TR)** | 3000 pcs. |
| | | | | 700 mA | **G3VM-61VY3** | | **G3VM-61VY3(TR05)** | 500 pcs. |
| | | | | | | | **G3VM-61VY3(TR)** | 3000 pcs. |
| SOP4 | 1b (SPST-NC) | | | 500 mA | **G3VM-63G** | 100 pcs. | **G3VM-63G(TR05)** | 500 pcs. |

✻ The AC peak and DC value are given for the load voltage and continuous load current.
**Note:** To order tape packaging for Relays with surface-mounting terminals, add "(TR)" or "(TR05)" to the end of the model number.

## ■Absolute Maximum Ratings (Ta = 25°C)

| | Item | Symbol | G3VM-61G2 | G3VM-61G3 | G3VM-61VY1 | G3VM-61VY2 | G3VM-61VY3 | G3VM-63G | Unit | Measurement conditions |
|---|---|---|---|---|---|---|---|---|---|---|
| Input | LED forward current | $I_F$ | 50 | 30 | | | | 50 | mA | |
| | LED forward current reduction rate | $\Delta I_F$/°C | –0.5 | –0.3 | | | | –0.5 | mA/°C | Ta ≥ 25°C |
| | LED reverse voltage | $V_R$ | 5 | | | 6 | | 5 | V | |
| | Connection temperature | $T_J$ | 125 | | | | | | °C | |
| Output | Load voltage (AC peak/DC) | $V_{OFF}$ | 60 | | | | | | V | |
| | Continuous load current (AC peak/DC) | $I_O$ | 400 | | 100 | 500 | 700 | 500 | mA | |
| | ON current reduction rate | $\Delta I_O$/°C | –4.0 | | –1.0 | –5.0 | –7.0 | –5.0 | mA/°C | Ta ≥ 25°C |
| | Pulse ON current | $I_{op}$ | 1200 | | 300 | 1500 | 2100 | 1500 | mA | t=100 ms, Duty=1/10 |
| | Connection temperature | $T_J$ | 125 | | | | | | °C | |
| Dielectric strength between I/O ✻ | | $V_{I-O}$ | 1500 | | 3750 | | | 1500 | Vrms | AC for 1 min |
| Ambient operating temperature | | Ta | -40 to +85 | | | -40 to +110 | | -40 to +105 | °C | With no icing or condensation |
| Ambient storage temperature | | Tstg | -55 to +125 | | | | | | °C | |
| Soldering temperature | | – | 260 | | | | | | °C | 10 s |

✻ The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.





ПРОМЭЛЕКТРОНИКА / sales@prom-elec.com

## ■Electrical Characteristics (Ta = 25°C)

| Item | | Symbol | | G3VM-61G2 | G3VM-61G3 | G3VM-61VY1 | G3VM-61VY2 | G3VM-61VY3 | G3VM-63G | Unit | Measurement conditions |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Input | LED forward voltage | $V_F$ | Minimum | 1.0 | 1.1 | | | | 1.0 | V | $I_F$=10 mA |
| | | | Typical | 1.15 | 1.27 | | | | 1.15 | | |
| | | | Maximum | 1.3 | 1.4 | | | | 1.3 | | |
| | Reverse current | $I_R$ | Maximum | 10 | | | | | | μA | $V_R$=5 V |
| | Capacitance between terminals | $C_T$ | Typical | 30 | | 50 | 30 | | | pF | V=0, f=1 MHz |
| | Trigger LED forward current | $I_{FT}$ ($I_{FC}$) ✻2 | Typical | 0.4 | – | 0.2 | 1 | | 0.6 | mA | G3VM-61G2/61G3: $I_O$=400 mA<br>G3VM-61VY1 : $I_O$=100 mA<br>G3VM-61VY2 : $I_O$=500 mA<br>G3VM-61VY3 : $I_O$=700 mA<br>G3VM-63G : $I_{OFF}$=10 μA |
| | | | Maximum | 1 | 0.2 | 1 | 3 | | | | |
| | Release LED forward current | $I_{FC}$ ($I_{FT}$) ✻2 | Minimum | 0.1 | – | 0.01 | 0.1 | | | mA | G3VM-61G2/61G3/61VY1/61VY2/61VY3 : $I_{OFF}$=100 μA<br>G3VM-63G : $I_O$=500 mA |
| | | | Typical | – | 0.001 | – | 0.5 | – | | | |
| Output | Maximum resistance with output ON | $R_{ON}$ | Typical | 1 | | 25 | 1 | 0.15 | 1 | Ω | G3VM-61G2 : $I_F$=2 mA, $I_O$=400 mA<br>G3VM-61G3 : $I_F$=0.5 mA, $I_O$=400 mA, t<1s<br>G3VM-61VY1: $I_F$=2 mA, $I_O$=100 mA, t<1s<br>G3VM-61VY2: $I_F$=5 mA, $I_O$=500 mA<br>G3VM-61VY3: $I_F$=5 mA, $I_O$=700 mA<br>G3VM-63G : $I_O$=500 mA |
| | | | Maximum | 2 | | 50 | 2 | | 2.5 | | |
| | Current leakage when the relay is open | $I_{LEAK}$ | Typical | 1 | | – | | 2 | – | nA | $V_{OFF}$=60 V |
| | | | Maximum | 1000 | | | | | | | |
| | Capacitance between terminals | $C_{OFF}$ | Typical | 130 | | 10 | 20 | 100 | | pF | G3VM-61G2/61G3/61VY1/61VY2/61VY3 : V=0, f=1 MHz<br>G3VM-63G : V=0, f=1 MHz, IF=5 mA |
| Capacitance between I/O terminals | | $C_{I-O}$ | Typical | 0.8 | | | | | | pF | f=1 MHz, $V_S$=0 V |
| Insulation resistance between I/O terminals | | $R_{I-O}$ | Minimum | 1000 | | | | | | MΩ | $V_{I-O}$=500 VDC, RoH≤60% |
| | | | Typical | $10^8$ | | | | | | | |
| Turn-ON time | | $t_{ON}$ | Typical | 3 | 3.5 | 1 | 0.6 | 2 | 0.3 | ms | G3VM-61G2 : $I_F$=2 mA, $R_L$=200 Ω, $V_{DD}$=20 V ✻1<br>G3VM-61G3 : $I_F$=0.5 mA, $R_L$=200 Ω, $V_{DD}$=20 V ✻1<br>G3VM-61VY1: $I_F$=2 mA, $R_L$=200 Ω, $V_{DD}$=10 V ✻1<br>G3VM-61VY2/61VY3: $I_F$=5 mA, $R_L$=200 Ω, $V_{DD}$=20 V ✻1<br>G3VM-63G : $I_F$=5 mA, $R_L$=200 Ω, $V_{DD}$=20 V ✻1 |
| | | | Maximum | 8 | 10 | 5 | 2 | 3 | 1 | | |
| Turn-OFF time | | $t_{OFF}$ | Typical | 1 | | | 0.1 | | 0.7 | | |
| | | | Maximum | 3 | 5 | | 0.5 | | 3 | | |

✻1. Turn-ON and Turn-OFF Times




✻2. These values are for Relays with NC contacts

## ■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.
Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

| Item | Symbol | | G3VM-61G2 | G3VM-61G3 | G3VM-61VY1 | G3VM-61VY2 | G3VM-61VY3 | G3VM-63G | Unit |
|---|---|---|---|---|---|---|---|---|---|
| Load voltage (AC peak/DC) | $V_{DD}$ | Maximum | 48 | | | | | | V |
| Operating LED forward current | $I_F$ | Minimum | – | | 2 | 5 | | | mA |
| | | Typical | 2 | 0.5 | 5 | 7.5 | | – | |
| | | Maximum | 25 | | 15 | 25 | | | |
| Continuous load current (AC peak/DC) | $I_O$ | Maximum | 320 | | 80 | 500 | 700 | 500 | |
| Ambient operating temperature | Ta | Minimum | –20 | | | | | | °C |
| | | Maximum | 65 | | | 100 | | 85 | |
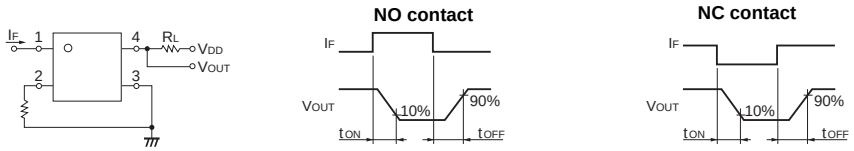
## ■Spacing and Insulation

| Item | G3VM-6□G□ | G3VM-61VY□ | Unit |
|---|---|---|---|
| | Minimum | | |
| Creepage distances | 4.0 | 5.0 | mm |
| Clearance distances | 4.0 | 5.0 | |
| Internal isolation thickness | 0.1 | 0.2 | |

## ■Engineering Data

● **LED forward current vs. Ambient temperature**




● **Continuous load current vs. Ambient temperature**




● **LED forward current vs. LED forward voltage**

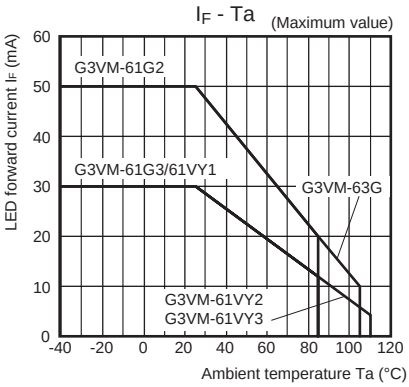


● **Continuous load current vs. On-state voltage**

G3VM-61G2/61G3/61VY2/63G

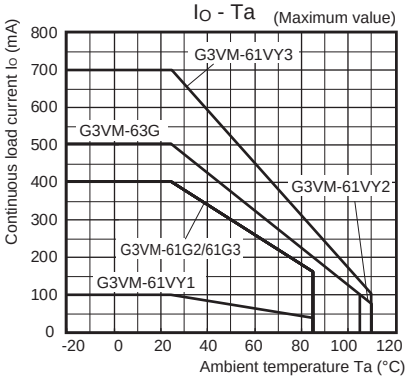


G3VM-61VY1

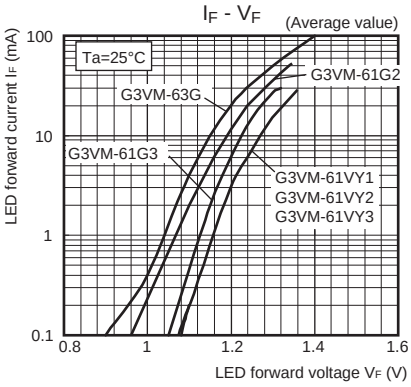


G3VM-61VY3

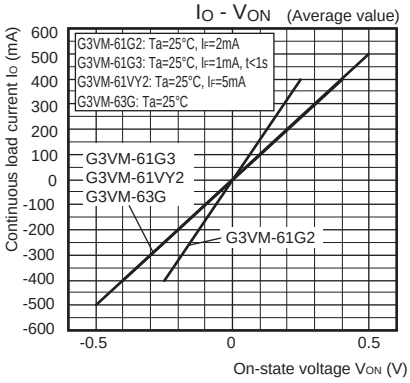


● **On-state resistance vs. Ambient temperature**

G3VM-61G2/61G3/61VY2/61VY3/63G

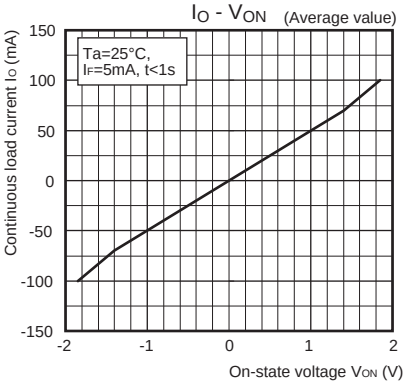


G3VM-61VY1

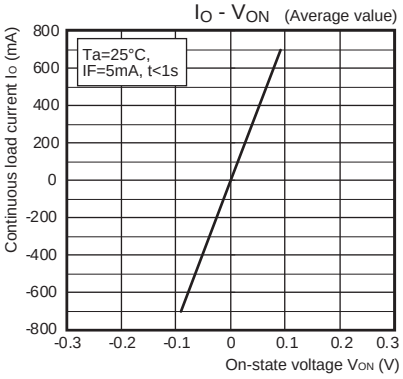


● **Trigger LED forward current vs. Ambient temperature**

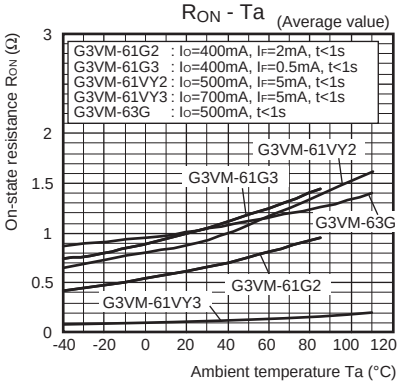


● **Turn ON, Turn OFF time vs. LED forward current**

G3VM-61G2/63G

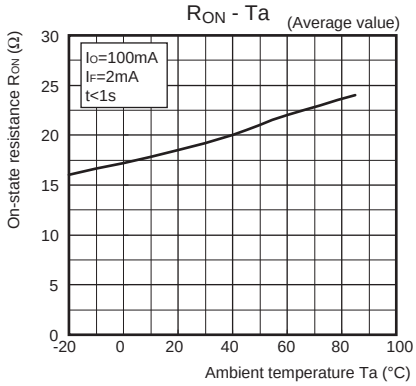


G3VM-61G3/61VY1/61VY2

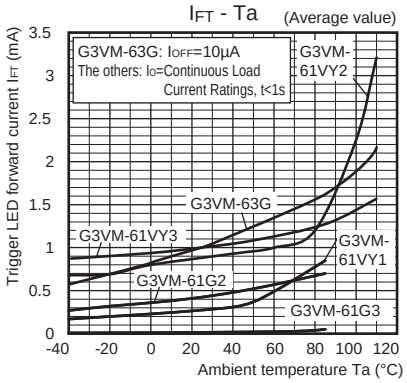


G3VM-61VY3



## ■Engineering Data

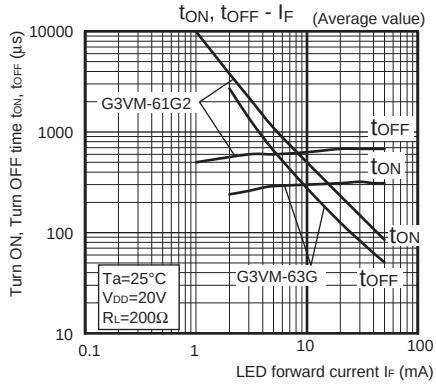● **Turn ON, Turn OFF time vs. Ambient temperature**

G3VM-61G2/61VY2/61VY3/63G

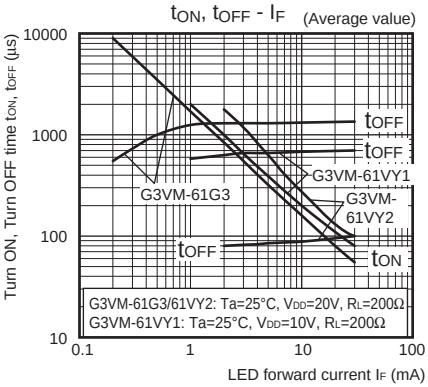


G3VM-61G3/61VY1

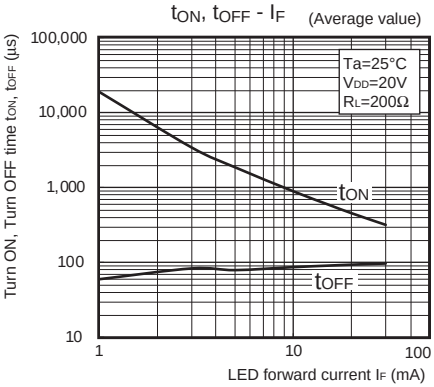


● **Current leakage vs. Ambient temperature**

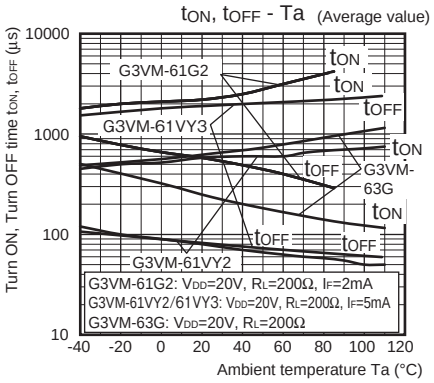


● **Current leakage vs. Load voltage**

G3VM-61G3/61VY1

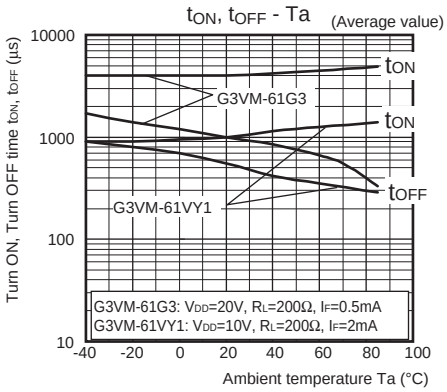


G3VM-61VY3

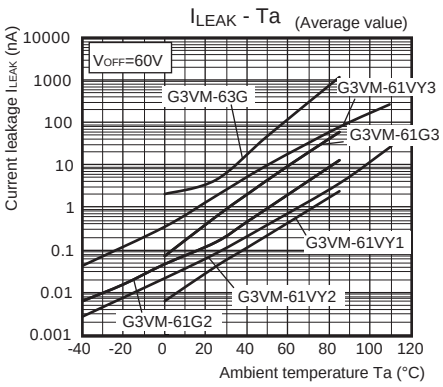

## ■Appearance/Terminal Arrangement/Internal Connections

### ●Appearance

**SOP (Small Outline Package)**

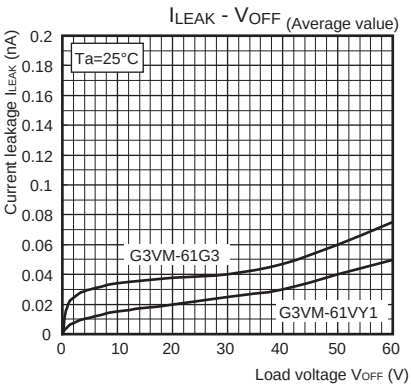SOP 4-pin

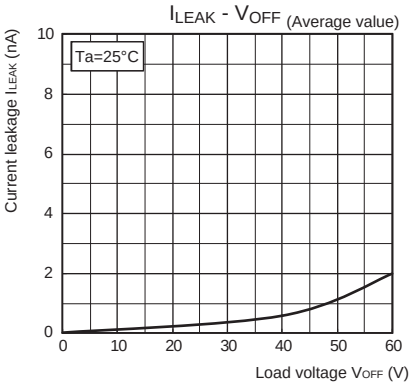


Special SOP 4-pin (G3VM-61VY1/61VY2/61VY3)




**Note: 1.** The actual product is marked differently from the image shown here.
**Note: 2.** "G3VM" does not appear in the model number on the Relay.
**Note: 3.** The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

### ●Terminal Arrangement/Internal Connections (Top View)

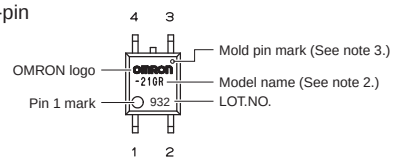G3VM-61G2/61G3/61VY1/61VY2/61VY3




G3VM-63G




## ■Dimensions (Unit: mm)

SOP (Small Outline Package)

SOP 4-pin



**Surface-mounting Terminals**

**Weight: 0.1 g**




**Actual Mounting Pad Dimensions**

(Recommended Value, Top View)




**Note:** The actual product is marked differently from the image shown here.

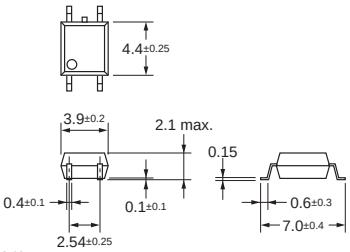Special SOP 4-pin *(G3VM-61VY1/61VY2/61VY3)



**Surface-mounting Terminals**

**Weight: 0.1 g**




**Actual Mounting Pad Dimensions**

(Recommended Value, Top View)




✻ The external dimensions are different from those of the standard SOP 4-pin, but the mounting pad dimensions are the same.
**Note:** The actual product is marked differently from the image shown here.

## ■Approved Standards

UL recognized

| Model | Approved Standards | Contact form | File No. |
|---|---|---|---|
| G3VM-61G2<br>G3VM-61G3<br>G3VM-61VY1<br>G3VM-61VY2<br>G3VM-61VY3 | UL recognized | 1a<br>(SPST-NO) | E80555 |
| G3VM-63G | | 1b<br>(SPST-NC) | |

## ■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

**OMRON Corporation**
**Electronic and Mechanical Components Company**

**Regional Contact**

**Americas**
https://www.components.omron.com/

**Europe**
http://components.omron.eu/

**Asia-Pacific**
https://ecb.omron.com.sg/

**China**
https://www.ecb.omron.com.cn/

**Korea**
https://www.omron-ecb.co.kr/

**Japan**
https://www.omron.co.jp/ecb/

© OMRON Corporation 2016-2019 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

**Cat. No. K282-E1-05**
0419(0216)(O)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

G3VM-63G G3VM-61VY2(TR) G3VM-61VY2 G3VM-61VY2(TR05)