




Miniature SOP4-pin type
with current limiting

PhotoMOS®
GU SOP 1 Form A
Current Limiting (AQY210LS)

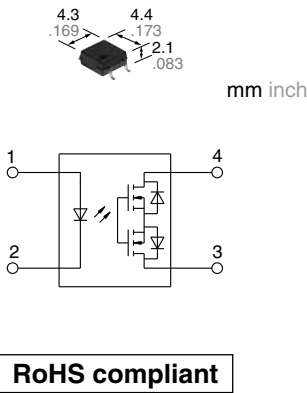

FEATURES

1. Current limiting function
To control an over current from flowing, the current limit function has been realized. It keeps an output current at a constant value when the current reaches a specified current limit value.
2. Enhances the capability of surge resistance between output terminals
The current limit function controls the ON time surge current to enhance the capability of surge resistance between output terminals.
3. Small SOP4-Pin package
The device comes in a super-miniature SO package 4-Pin type measuring (W) 4.3×(L) 4.4×(H) 2.1 mm (W) .169×(L) .173×(H) .083 inch
4. Controls low-level analog signals
5. Low-level off state leakage current

TYPICAL APPLICATIONS

- Telephone equipment
- Modem
- Measuring equipment

TYPES

	Output rating*		Package	Part No.			Packing quantity	
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel
					Picked from the 1/2-pin side	Picked from the 3/4-pin side		
AC/DC dual use	350V	120mA	SOP4-pin	AQY210LS	AQY210LSX	AQY210LSZ	1 tube contains: 100 pcs. 1 batch contains: 2,000 pcs.	1,000 pcs.

* Indicate the peak AC and DC values.
Note: For space reasons, only "210L" is marked on the product. The three initial letters of the part number "AQY", the surface mount terminal shape indicator "S" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQY210LS	Remarks
Input	LED forward current	I _F	50 mA	
	LED reverse voltage	V _R	5 V	
	Peak forward current	I _{FP}	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW	
Output	Load voltage (peak AC)	V _L	350 V	
	Continuous load current	I _L	0.12 A	Peak AC, DC
	Power dissipation	P _{out}	400 mW	
Total power dissipation		P _T	450 mW	
I/O isolation voltage		V _{iso}	1,500 Vrms	
Ambient temperature	Operating	T _{opr}	−40 to +85°C −40 to +185°F	(Non-icing at low temperatures)
	Storage	T _{stg}	−40 to +100°C −40 to +212°F	

GU SOP 1 Form A Current Limiting (AQY210LS)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQY210LS	Condition
Input	LED operate current	Typical	I _{Fon}	1.2 mA	I _L = Max.
		Maximum		3 mA	
	LED turn off current	Minimum	I _{Foff}	0.4 mA	I _L = Max.
		Typical		1.1 mA	
	LED dropout voltage	Minimum	V _F	1.25 (1.14 V at I _F = 5 mA)	I _F = 50 mA
		Typical		1.5 V	
Output	On resistance	Typical	R _{on}	20Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum		25Ω	
	Off state leakage current	Maximum	I _{Lleak}	1μA	I _F = 0 V _L = Max.
	Current limit	Typical	—	0.18 A	I _F = 5 mA
Transfer characteristics	Turn on time*	Typical	T _{on}	0.5 ms	I _F = 5 mA I _L = Max.
		Maximum		2.0 ms	
	Turn off time*	Typical	T _{off}	0.08 ms	I _F = 5 mA I _L = Max.
		Maximum		1.0 ms	
	I/O capacitance	Typical	C _{iso}	0.8 pF	f = 1 MHz V _B = 0 V
		Maximum		1.5 pF	
	Initial I/O isolation resistance	Minimum	R _{iso}	1,000 MΩ	500 V DC

*Turn on/Turn off time

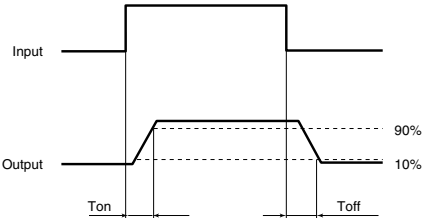

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.


Item		Symbol	Min.	Max.	Unit
LED current		I _F	5	30	mA
AQY210LS	Load voltage (Peak AC)	V _L	—	280	V
	Continuous load current	I _L	—	0.12	A

■ These products are not designed for automotive use.
If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature:
-40 to +85°C
-40 to +185°F

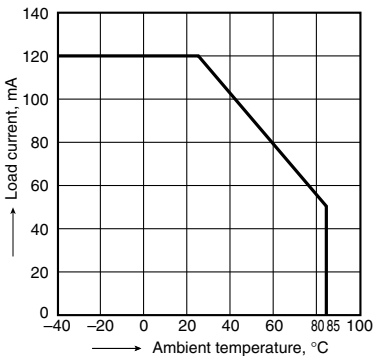


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4;
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max.(DC)

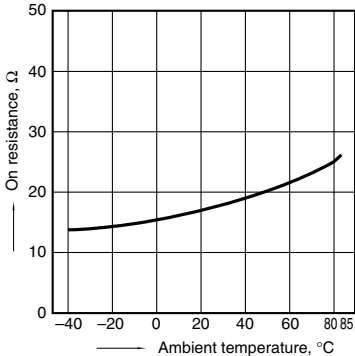


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max.(DC);
Continuous load current: Max.(DC)

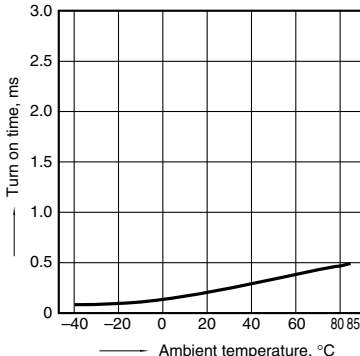


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max.(DC); Continuous load current: Max.(DC)

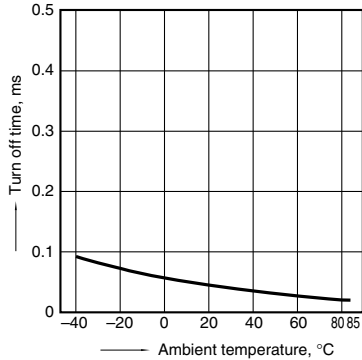


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max.(DC); Continuous load current: Max.(DC)

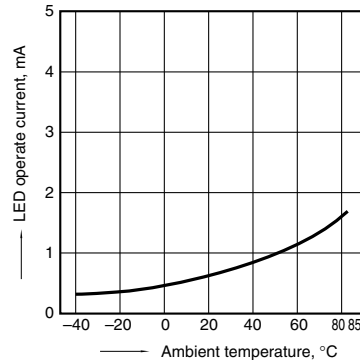


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max.(DC); Continuous load current: Max.(DC)

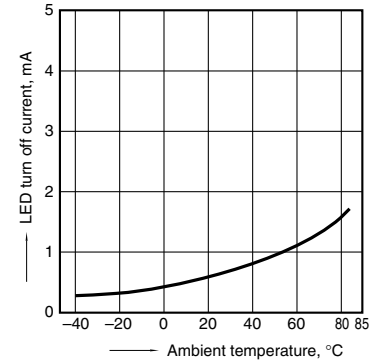


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

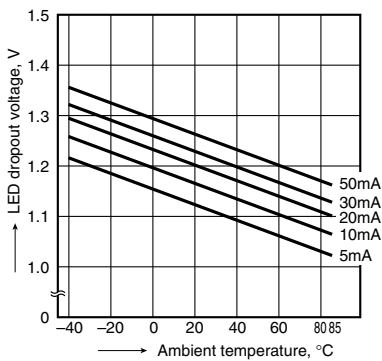


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F

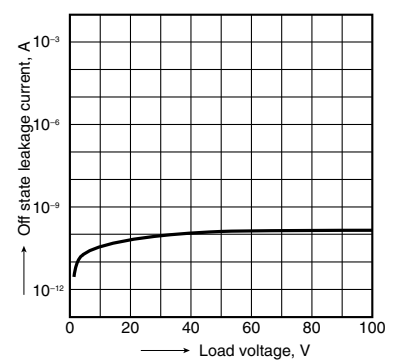


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4; Load voltage: Max.(DC); Continuous load current: Max.(DC); Ambient temperature: 25°C 77°F

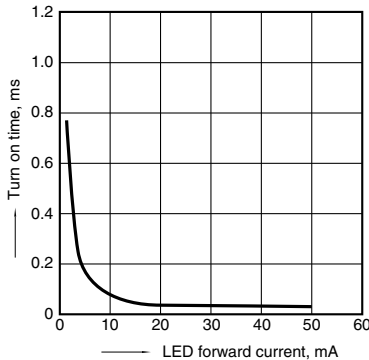


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4; Load voltage: Max.(DC); Continuous load current: Max.(DC); Ambient temperature: 25°C 77°F

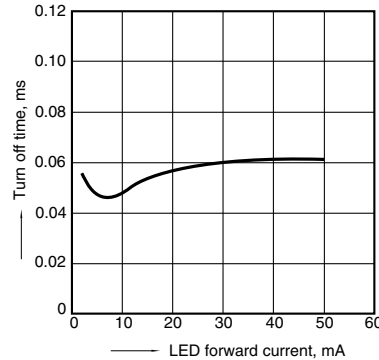

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

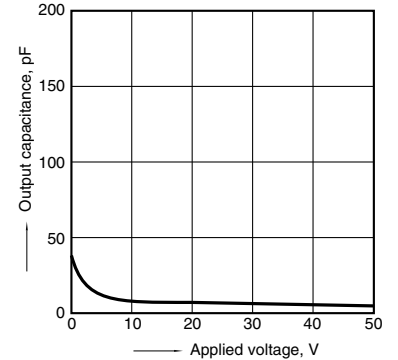

What is current limit


When a load current reaches the specified output control current, a current limit function works against the load current to keep the current a constant value.

The current limit circuit built into the PhotoMOS thus controls the instantaneous load current to effectively ensure circuit safety.

This safety feature protects circuits downstream of the PhotoMOS against over-current.

But, if the current-limiting feature is used longer than the specified time, the PhotoMOS can be destroyed. Therefore, set the output loss to the max. rate or less.

• Comparison of output voltage and output current characteristics V-I Characteristics



"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[AQY210LS](#)