

MICRO SWITCH

FED. MFR CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
21 CH 28

REPLACES
L C057370
TSK
16 MAY 85
M C063289
TSK
15 APR 88
N C074101
LJF
3 FEB 95
P C077048
SAD
18 MAY 94
Q 0016449
KSR
28 OCT 05

21 CH 28

M

DRAWING
NUMBER


16

ISSUE


REVISIONS

A	MADE MPS 4 DEC 64	17 NOV '64
B	CO 20147 M B F 6 AUG 65	17 NOV '64
C	SR 12267 L S O 15 APR 66	17 NOV '64
D	CO 21874 M B F 28 SEPT 66	17 NOV '64
E	CO 22953 M B F 4 DEC 67	17 NOV '64
F	CO 31643-B BEN 9 OCT 74	17 NOV '64
G	CO 34722 JAL 8 JAN 75	17 NOV '64
H	CO 35858 D J W 26 AUG 75	17 NOV '64
J	CO 44351 S L B 5 JAN 79	17 NOV '64
K	CO 47573 J M J 26 JUL 80	17 NOV '64


RASTER
FO-80378-003
DRAWN
H B W
13 NOV 64

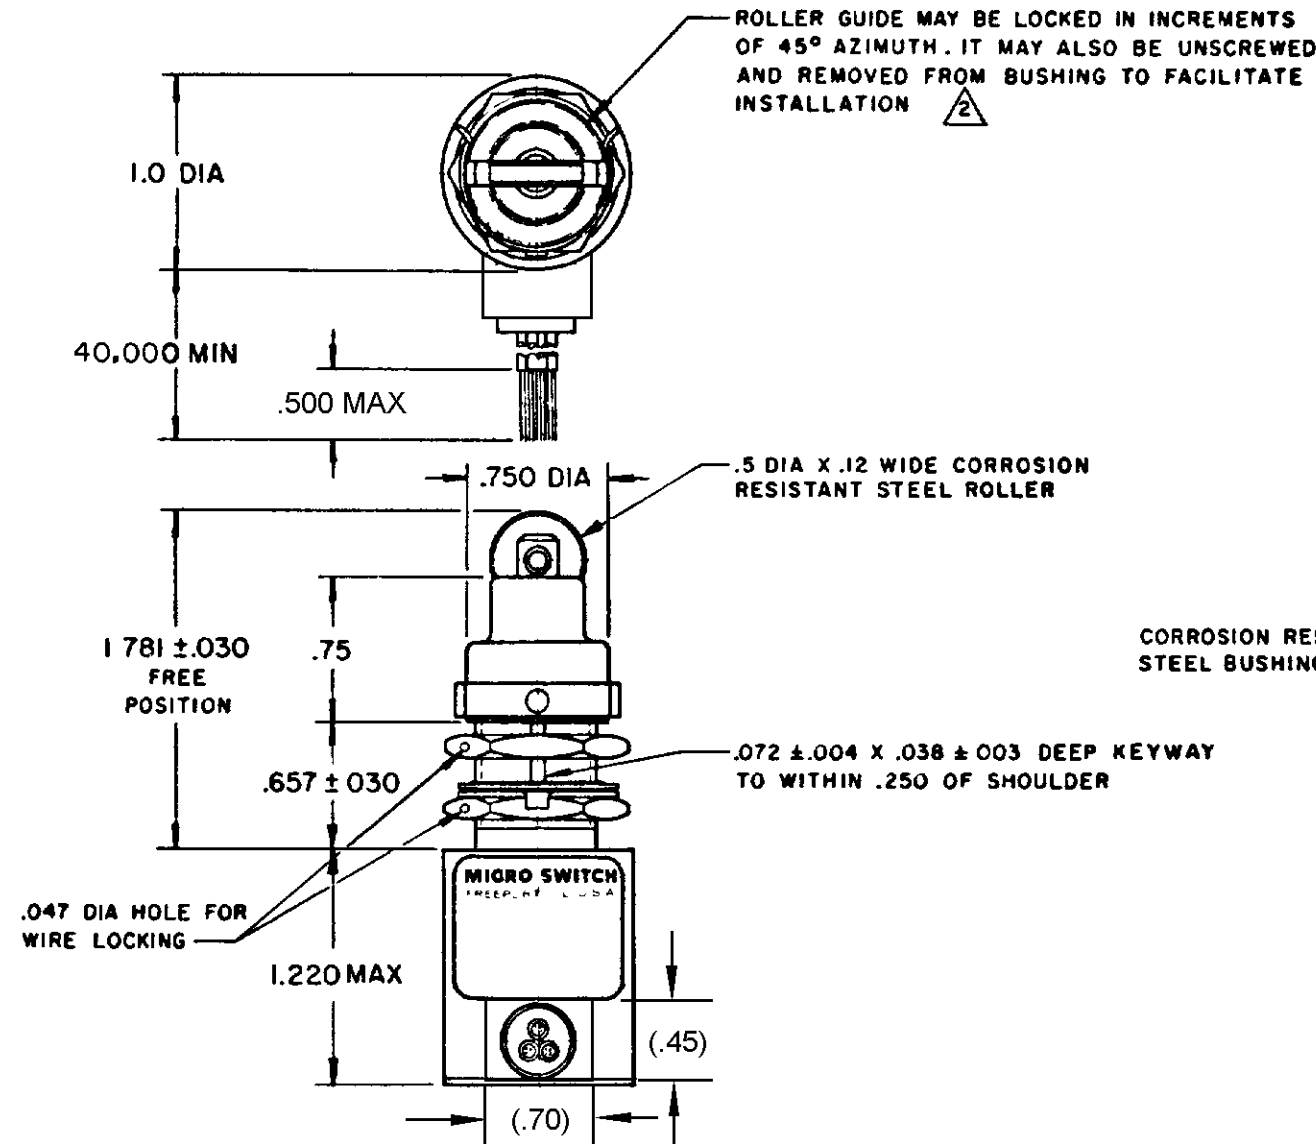

Промэлектроника
sales@prom-elec.com



CIRCUIT DIAGRAM

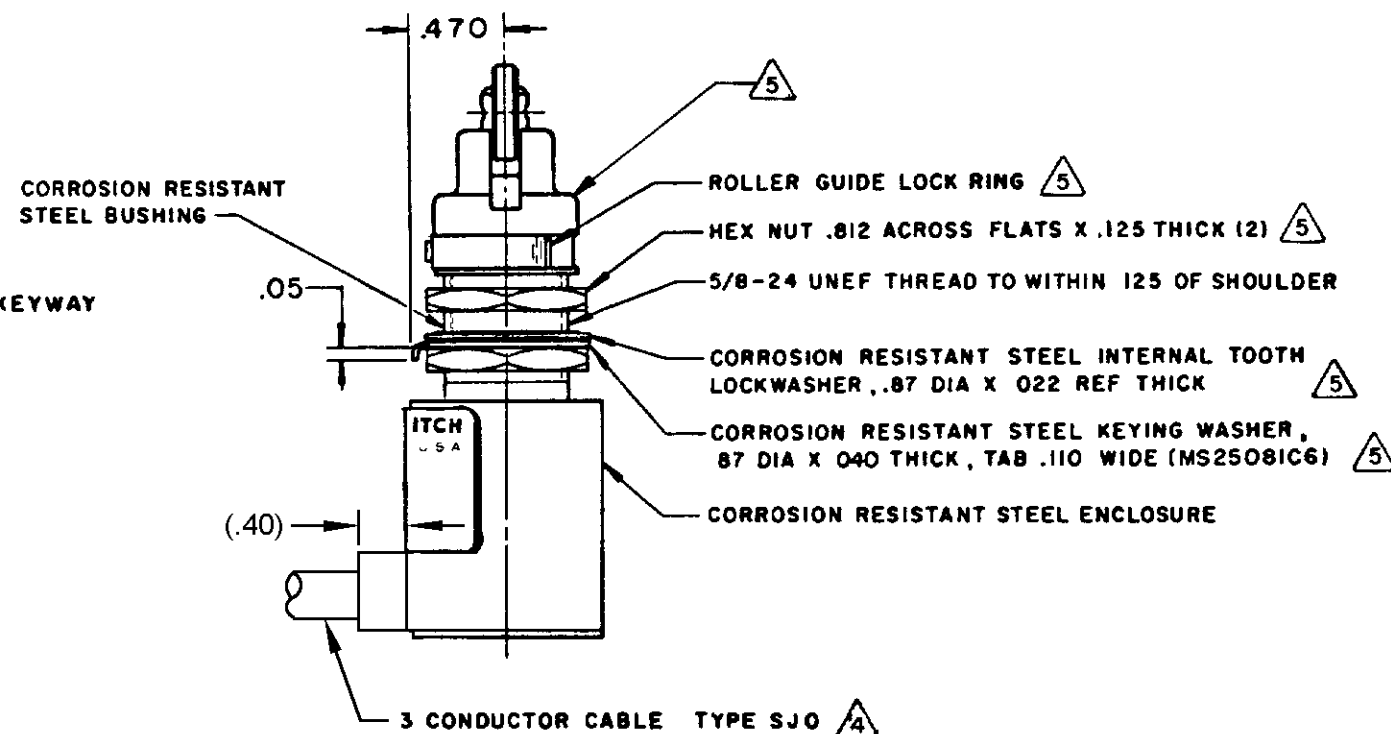

NOTES

- 1 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 3
- 2 - TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
- 3 - CIRCUIT DIAGRAM, CATALOG LISTING AND DATE CODE ARE SHOWN ON NAMEPLATE
- 4 - LEAD WIRES COLOR CODED TO SHOW LEAD IDENTIFICATION
- 5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-MONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE ----- 6-12 LB		CONTACT ARRANGEMENT	
FULL OVERTRAVEL FORCE ----- 30 LB MAX		S P D T	
RELEASE FORCE ----- 4 LB MIN		28 VDC	
PRETRAVEL ----- .040 MAX		SEA LEVEL	
DIFFERENTIAL TRAVEL ----- .020 MAX		50,000 FT.	
OVERTRAVEL ----- .250 MIN		LOAD	
		RES	
		IND	
		MOTOR	
		SCALE FULL	
		DO NOT SCALE PRINT	
		UNLESS OTHERWISE SPECIFIED	
		DIMENSIONS ARE IN INCHES	
		TOLERANCES ARE:	
		ONE PLACE (.0)	
		TWO PLACE (.00)	
		THREE PLACE (.000)	
		ANGLES	
		WEIGHT 9.0 OZ MAX	