

Honeywell



FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-6C37E9-036


CW-C6037

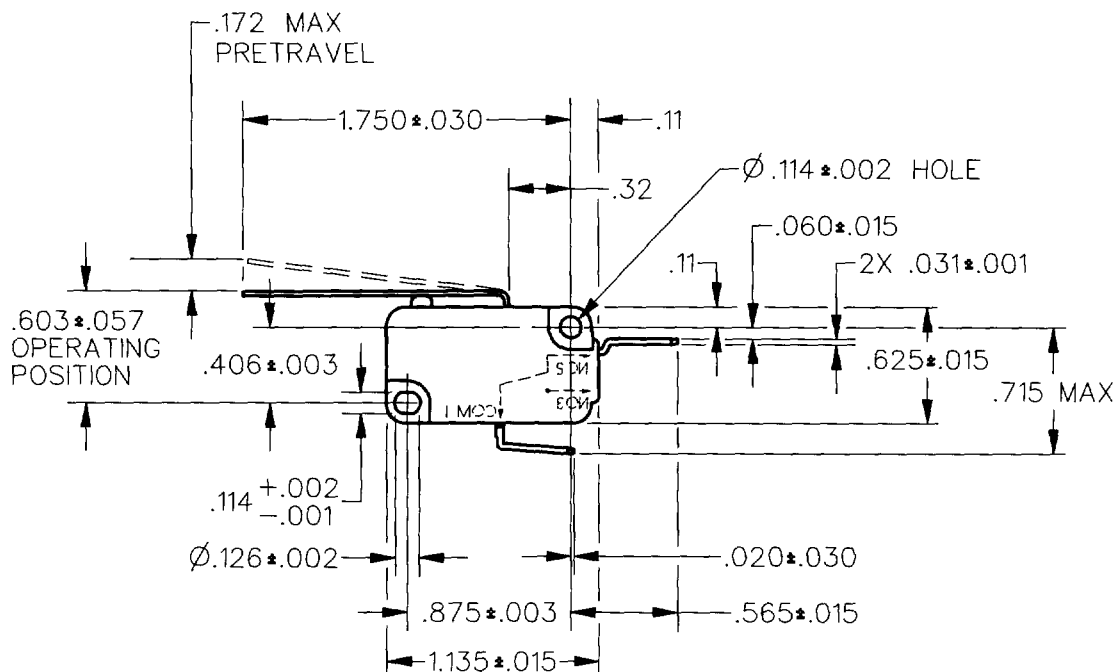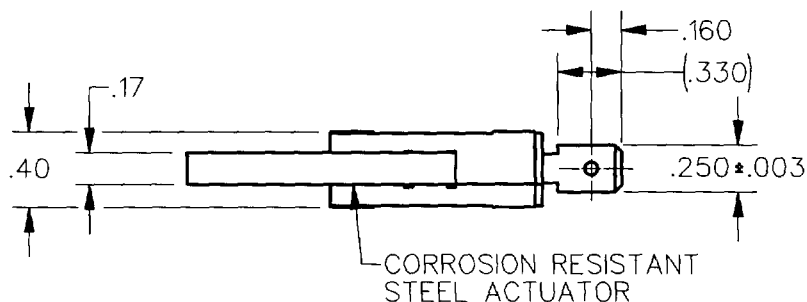

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF HONEYWELL.

THIRD ANGLE PROJECTION



CHARACTERISTICS		ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — — 6 OZ MAX		CONTACT ARRANGEMENT S P N C	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 1 OZ MIN		L215		
DIFFERENTIAL TRAVEL — — — — .038 MAX		15.1A 1/2HP 125, 250 OR 277 VAC	ONE PLACE (.0)	±.030
OVERTRAVEL — — — — .091 MIN		1/2A 125 VDC	TWO PLACE (.00)	±.015
RELEASE TRAVEL — — — — .022 MIN		1/4A 250 VDC; 5A 125 VAC "L"	THREE PLACE (.000)	±.005
			ANGLES	±3°
			WEIGHT	



CATALOG LISTING
V7-6C37E9-036
ISSUE 2
CHECK
RELEASE NO PR-20992
REPLACES
REVISONS
A 0041196
JA 01JUL08
01JUL08
ASD
CHECK
16 FEB 94
DCS
CHECK
22 NOV 93
DCS
DRAWN
MASTER