
AL2410

IO-Link CompactLine module

IO-Link module 4 DI M8 IP 67

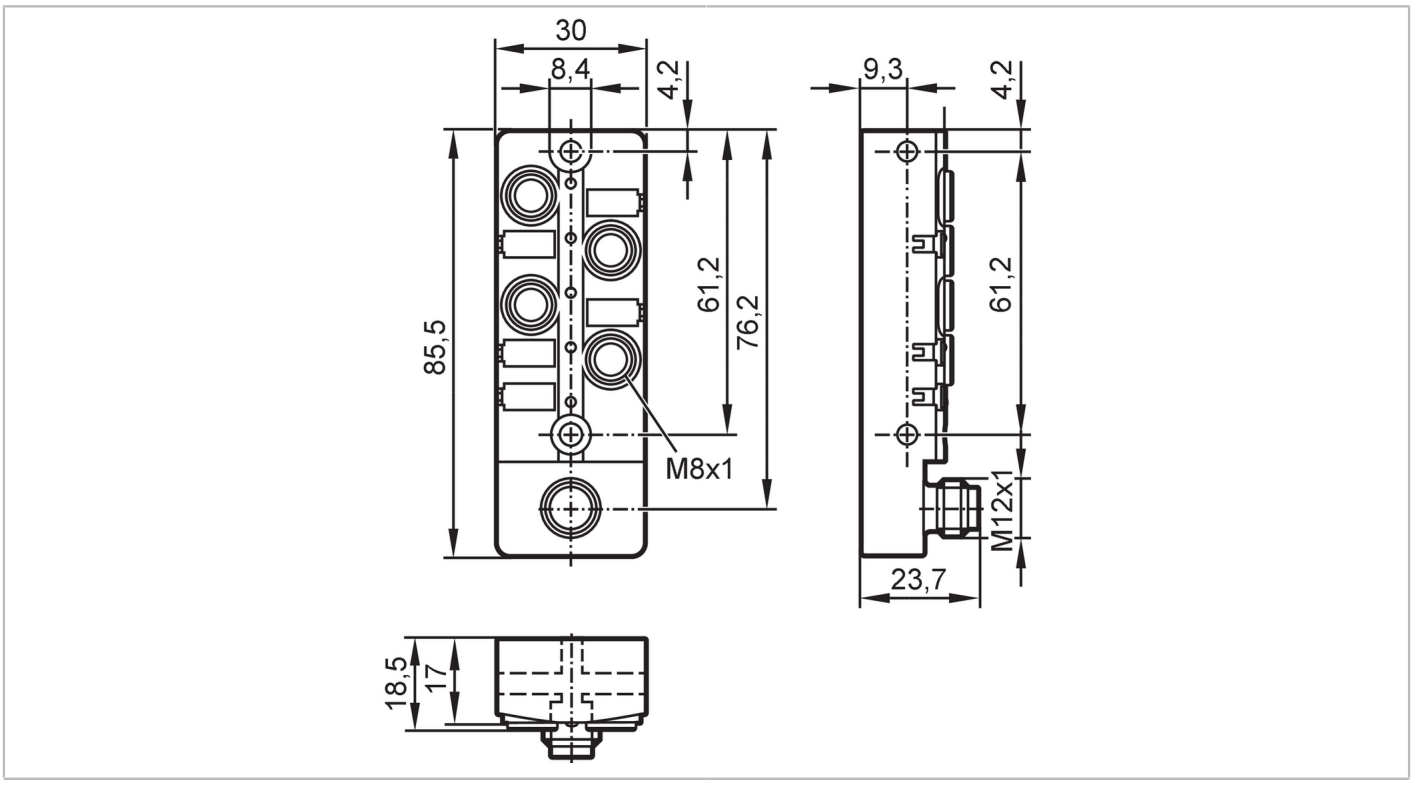

Electrical data			
Operating voltage	[V]	18...30 DC; ("supply class 2" to cULus)	
Current consumption	[mA]	50	
Sensor supply US			
Current rating per port	[A]	0.1	
Inputs / outputs			
Number of inputs and outputs		Number of digital inputs: 4	
Inputs			
Number of digital inputs		4	
Input circuit of digital inputs		PNP	
Input current limitation	[mA]	15	
Input current High	[mA]	6...10	
Input current Low	[mA]	0...2	
Switching level high	[V]	> 11	
Digital inputs protected against short circuits		yes	
Interfaces			
Communication interface		IO-Link	
Supported DeviceIDs		**Type of operation**	**DeviceID**
		IO-Link Device	789
IO-Link Device			
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	

AL2410

IO-Link CompactLine module

IO-Link module 4 DI M8 IP 67

SDCI standard		IEC 61131-9	
Profiles		Smart Sensor - SSP 0	Generic Profiled Sensor
		Function	Device identification
		Function	Process data variable
		Function	Device diagnosis
SIO mode		no	
Process data binary		32	
Min. process cycle time	[ms]	2.9	
Operating conditions			
Ambient temperature	[°C]	-25...70	
Storage temperature	[°C]	-25...85	
Max. relative air humidity	[%]	90; (non condensing)	
Protection		IP 67	
Protection rating (NEMA 250)		6P	
Chemical media		ISO 16750-5	AA, BA, BD, HLP, CC, DB, DC, DD, CA
		NEMA 250 5.13.1	AA
Tests / approvals			
EMC		EN 61000-6-2	
		EN 61000-6-3	
		IEC 61131-9	
MTTF	[years]	306	
Mechanical data			
Weight	[g]	103.7	
Housing		rectangular	
Type of mounting		backplane mounting	
Dimensions	[mm]	85.5 x 30 x 23.7	
Materials		housing: PBT; socket: brass nickel-plated; O-ring: FKM	
Sealing material		FKM	
Displays / operating elements			
Display		operation	LED, green
		errors	LED, red
		function	LED, yellow
Accessories			
Items supplied		panel for labelling	
		Protective caps: 2	
Accessories (optional)		Protective cap: M8, E73005	
Remarks			
Remarks		For use in NFPA 79 applications only	
		The device is to be operated to IO-Link specification V1.1.2.	
		The maximum cable length of the IO-Link cable is 20 m.	
Pack quantity		1 pcs.	

AL2410

IO-Link CompactLine module

IO-Link module 4 DI M8 IP 67

Electrical connection - IO-Link


Connector: 1 x M12; coding: A; Contacts: 4



	IO-Link
1	L +
2	not used
3	L -
4	C/Q / IO-Link

Electrical connection - Inputs

Connector: 4 x M8; coding: A; Contacts: 3; Sealing: FKM



	Inputs X1.0...X1.3
1	Sensor supply +24 V
3	Sensor supply -
4	data input