
E33202

Process adapter Tri-Clamp

ADAPT IFM-CLAMP ISO2852 2"

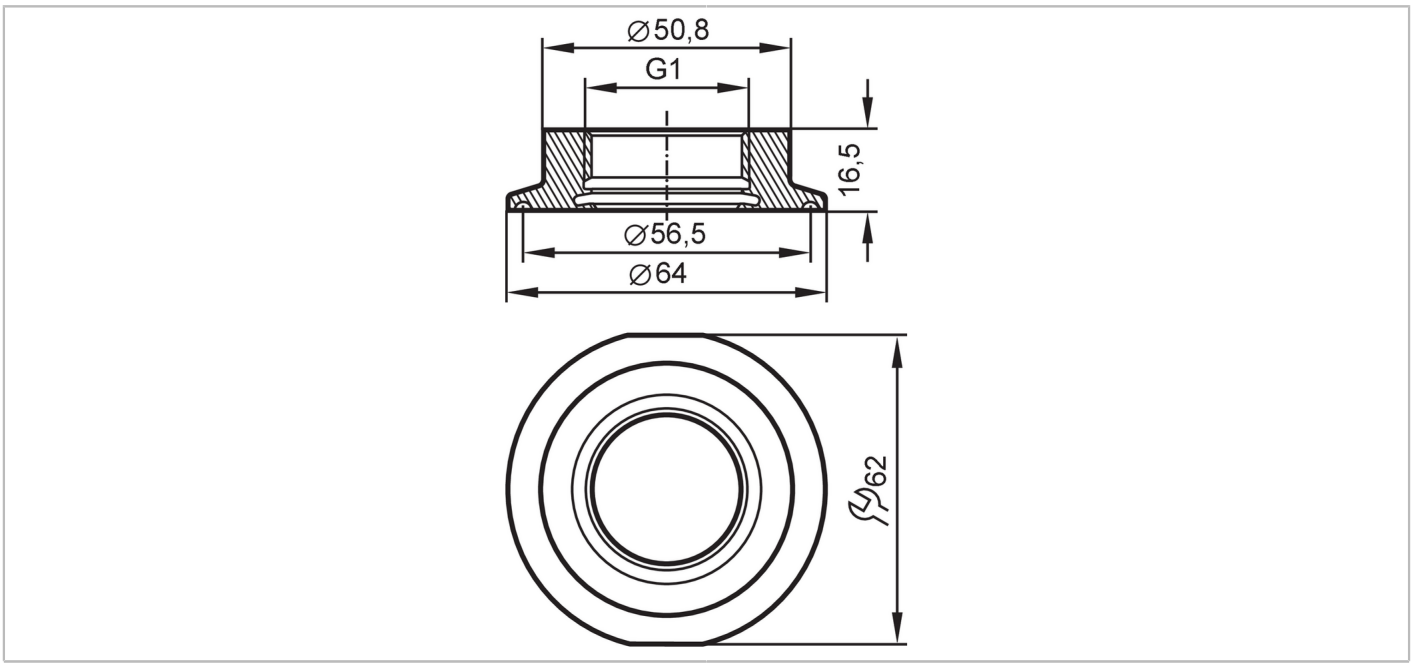

CRN EC 1935/2004 FCM FCM JP FDA Hygienic Cleanable

Application			
Pressure rating	16 bar		1.6 MPa
Tests / approvals			
Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.		
Safety instructions	The compatibility between medium and product material has to be checked in all applications.		
Mechanical data			
Weight [g]	227.5		
Materials (wetted parts)	stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm		
Sensor connection	G 1 internal thread Aseptoflex Vario		
Process connection	Clamp DN50 (2") Ø 64 mm DIN 32676 (ISO 2852)		
Suitable for process connections in accordance with the standards	DIN 32676 series A (DIN)	clamp DN50	
	DIN 32676 series B (ISO)	clamp DN42,4, DN48,3	
	DIN 32676 series C (ASME BPE)	clamp 2"	
	ISO 2852	clamp DN40, DN51	
Sealing	Gasket		
Hygienic equipment class to DIN 11866	H4		
Accessories			
Items supplied	O-Ringe: 1 x (24 x 2 mm), EPDM, E30054		
Accessories (optional)	O-Ring: 1 x (24 x 2 mm), FKM, E30123		
	O-Ring: 1 x (24 x 2 mm), EPDM, FCM China, E30163		
	Dichtungsring: 1, PEEK, E30124		
Remarks			
Pack quantity	1 pcs.		