
E33242

Process adapter with flange plate DRD

ADAPT IFM-DRD D=65

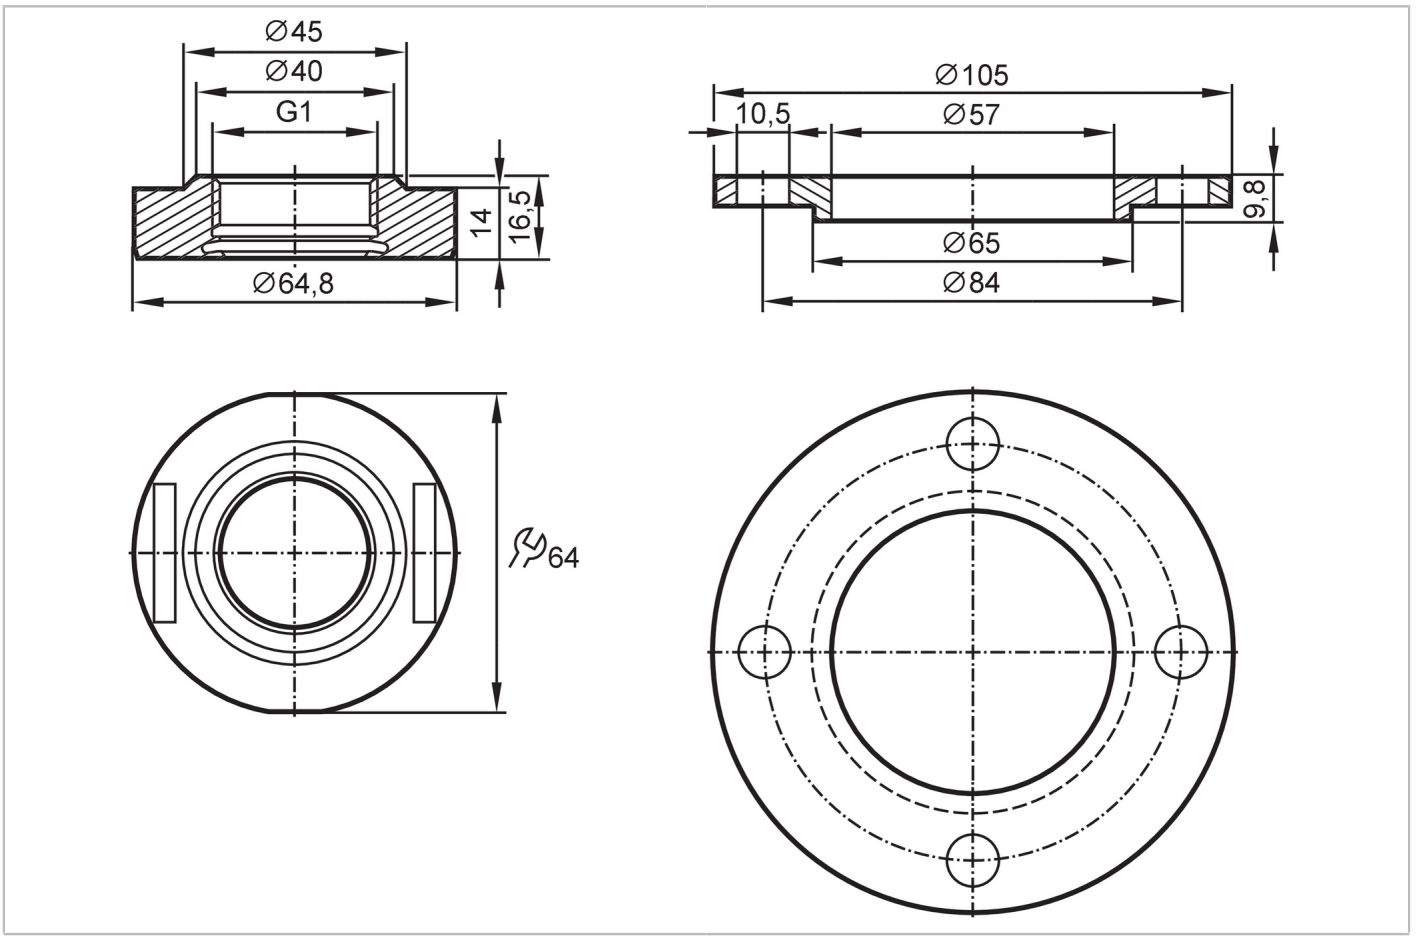

EC 1935/2004 FCM FCM JP FDA

Application			
Pressure rating		25 bar	2.5 MPa
Tests / approvals			
Pressure Equipment Directive		A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions		The compatibility between medium and product material has to be checked in all applications.	
Mechanical data			
Weight	[g]	615	
Materials (wetted parts)		stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm	
Sensor connection		G 1 internal thread Aseptoflex Vario	
Process connection		DRD-Flansch Ø 65 mm Ø 105 mm	
Sealing		Gasket	
Hygienic equipment class to DIN 11866		H4	
Accessories			
Items supplied		O-Ringe: 1 x (24 x 2 mm), EPDM, E30054	
Accessories (optional)		O-Ring: 1 x (24 x 2 mm), FKM, E30123	
		O-Ring: 1 x (24 x 2 mm), EPDM, FCM China, E30163	
		Dichtungsring: 1, PEEK, E30124	

E33242

Process adapter with flange plate DRD

ADAPT IFM-DRD D=65

Remarks	
Pack quantity	1 pcs.