
EC2013

Wirable AMP connector

R360/PLUG

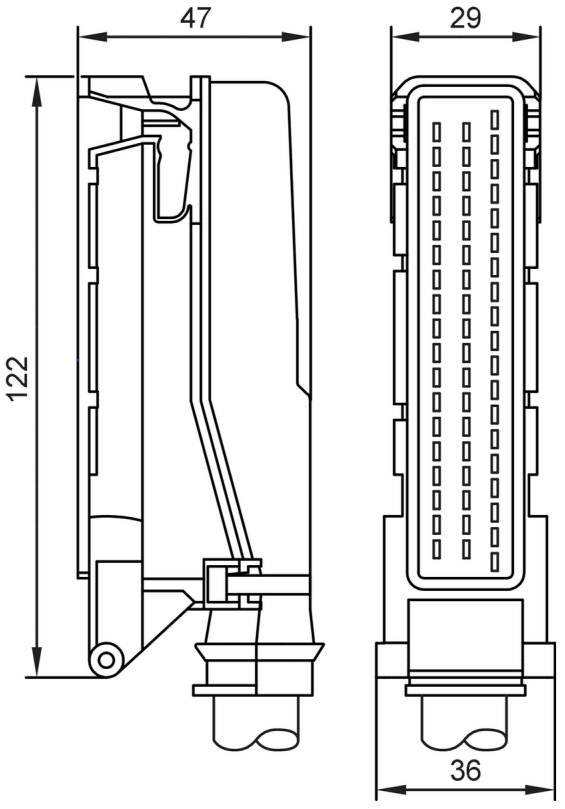

Application		
Application		Industrial applications / factory automation; Use in mobile and harsh applications
Operating conditions		
Ambient temperature	[°C]	-40...80
Protection		IP 20
Mechanical data		
Weight	[g]	99.3
Remarks		
Pack quantity		1 pcs.
Electrical connection - AMP connector		
Connector: AMP-Junior Timer; Moulded body: PBT, black; 55-pole, lockable and with reverse polarity protection		
Diagrams and graphs		
connector		