
IN5373

Dual inductive sensor for valve actuators

IND3007DBPKG/US-100-DPV

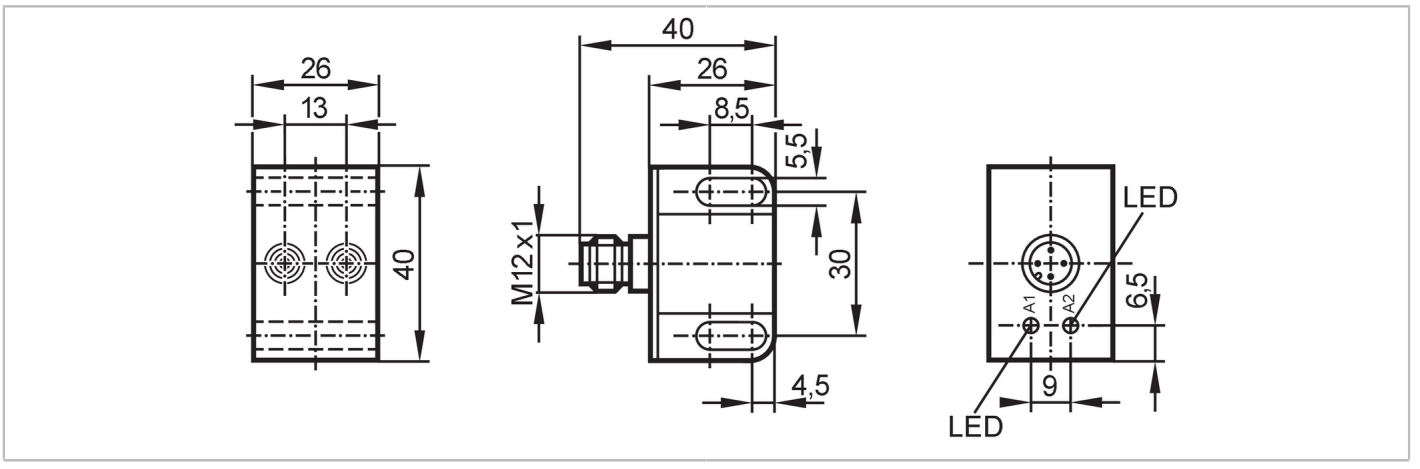

Product characteristics		
Electrical design		PNP
Output function		2 x normally open
Sensing range	[mm]	7
Housing		rectangular
Dimensions	[mm]	40 x 26 x 26
Application		
Application		position sensor for valve actuators
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 15
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		2 x normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	800
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Sensing range	[mm]	7
Real sensing range Sr	[mm]	7 ± 10 %
Operating distance	[mm]	0...5.7
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3

IN5373

Dual inductive sensor for valve actuators

IND3007DBPKG/US-100-DPV

Hysteresis	[% of Sr]	3...15	
Switch point drift	[% of Sr]	-10...10	
Operating conditions			
Ambient temperature	[°C]	-25...70	
Protection		IP 67	
Tests / approvals			
EMC		EN 60947-5-2	
		EN 55011	class B
MTTF	[years]	1064	
Mechanical data			
Weight	[g]	40.5	
Housing		rectangular	
Mounting		non-flush mountable	
Dimensions	[mm]	40 x 26 x 26	
Materials		PC	
Tightening torque	[Nm]	0.6...1.5; (Lock nut)	
Displays / operating elements			
Display		switching status	2 x LED, yellow
Remarks			
Pack quantity		1 pcs.	
Electrical connection - plug			

Connector: 1 x M12; coding: A; Contacts: 4



Connection

