



# EH-308S

Sensor Head, Shielded Type, f8, Stainless Steel Tube



\*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.


## Specifications

|                                      |                     |                                                                                 |
|--------------------------------------|---------------------|---------------------------------------------------------------------------------|
| Model                                |                     | EH-308S                                                                         |
| Type                                 |                     | with stainless steel spiral tube, Shielded , Cylindrical                        |
| Detectable object                    |                     | Ferrous metals (see Characteristics for nonferrous metals)                      |
| Standard target (iron, t=1 mm 0.04") |                     | 10 x 10 mm 0.39" x 0.39"                                                        |
| Stable detecting range               |                     | 0 to 2 mm0.08"                                                                  |
| Maximum detecting distance           |                     | 5 mm0.20"                                                                       |
| Hysteresis                           |                     | 0.04 mm0.002"                                                                   |
| Repeatability                        |                     | 0.005 mm0.0002"                                                                 |
| Temperature characteristics          |                     | ±10% max. of detecting distance at 23°C 73.4°F, within -10 to +60°C 14 to 140°F |
| Environmental resistance             | Enclosure rating    | IP67                                                                            |
|                                      | Ambient temperature | -10 to +60 °C 14 to 140 °F (No freezing)                                        |
|                                      | Relative humidity   | 35 to 85 % RH (No condensation)                                                 |
| Weight                               |                     | Approx. 88 g (including 3-m 9.8' cable)                                         |

## Dimensions

\* Download CAD file or product manual for larger image/text and more detail.


EH-308S

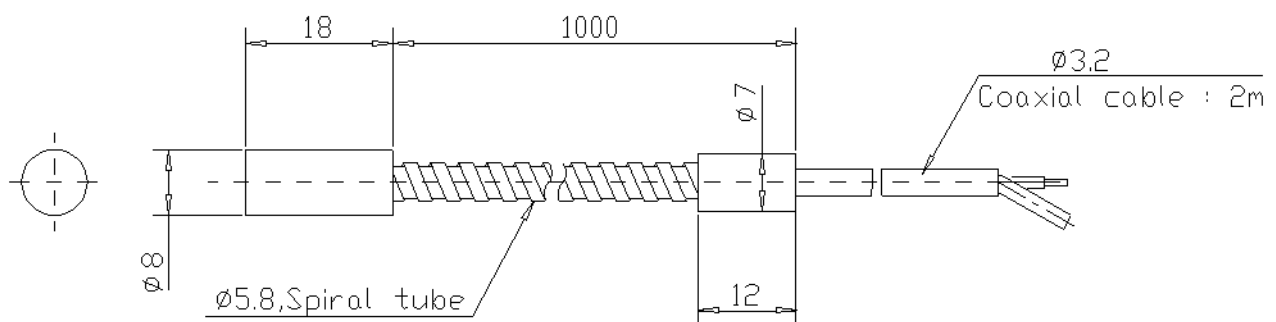

# Characteristic

\* Download CAD file or product manual for larger image/text and more detail.

## Characteristics

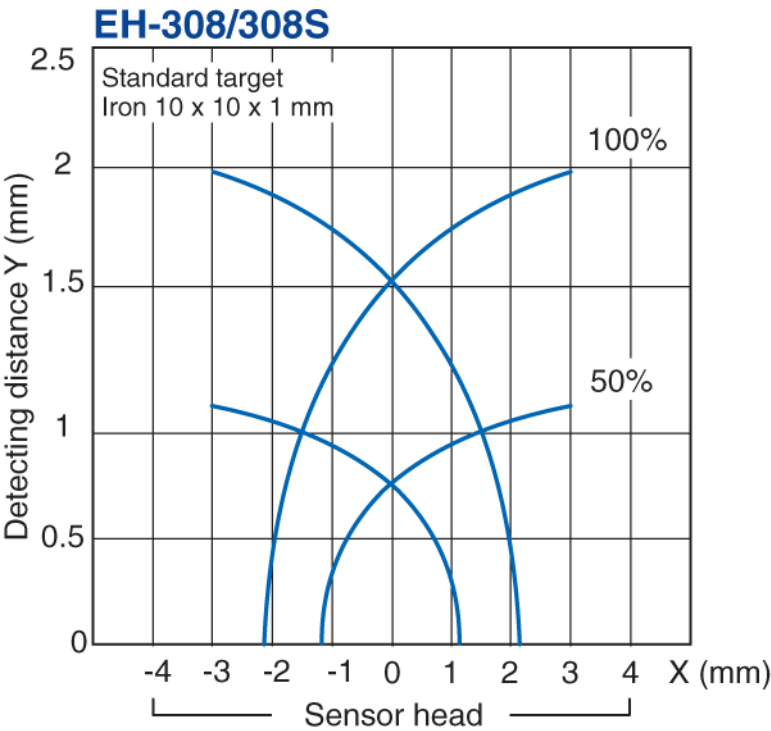

Detecting distance vs. size and material of target (Typical)

