



GS-73PCSO(3198)

Power-to-lock High coding High performance type PNP M12 connector

*Please note that accessories depicted in the image are for illustrative purposes only and may not be included with the product.

Specifications

Model			GS-73PCSO(3198)
Lock type			Power-to-lock type
Type			Advanced function type
Response time	Lock	Lock→Unlock	320 ms*1*2
		Unlock→Lock	220 ms*1*2*3
Lock	Locking force (Fzh)		Min. 2,000 N
	Alignment tolerance of lock		±2 mm ±0.08"
	Mechanical life-span		1 million cycles or more (with door operation speed of 1 m/s)
	Acceptable operation frequency		1 Hz*4
	Door radius		Min. 250 mm 9.84"
	Auxiliary release		Front, back *5
Cascading			Max. 25 units
Control output (OSSD output)	Output		Transistor outputs × 2
	Max. load current		Max. 150 mA
	Residual voltage (during ON)		Max 2.5 V (with a cable length of 5 m 16.40')
	OFF state voltage		Max 2.0 V (with a cable length of 5 m 16.40')
	Leakage current		Max. 0.5 mA
	Max. capacitive load		2.2 µF
	Load wiring resistance		Max. 2.5 Ω
AUX (Non-safety related output)	Output		Transistor output
	Number of outputs		2*6
	Max. load current		50 mA
	Residual voltage (during ON)		Max 2.5 V (with a cable length of 5 m 16.40')
External input (Short-circuit current)	Safety input		Approx.1.5 mA × 2
	Reset/EDM input		Approx. 10 mA × 1
	Lock control input		Approx. 2.5 mA × 1
	OSSD operation switching input		Approx. 2.5 mA × 2*7
Applicable Standards (Safety)			EN 61508, IEC 61508(SIL2/SIL3) EN 62061, IEC62061(SIL CL2/SIL CL3) EN ISO13849-1: 2015(PLd, Category 2/PLe, Category 4) EN ISO14119(Type4) IEC 60947-5-3, EN 60947-5-3 UL 61010-1, CAN/CSA-C22.2 No.61010-1
Protection circuit			Reverse current protection, short-circuit protection and surge protection for each output
Power supply	Power voltage		24 V DC ±20 % (Ripple P-P 10 % or less, Class2)
	Power consumption		3.4 W*8

Environmental resistance	Enclosure rating		IP65/67(IEC60529), IP69K(ISO 20653) (TÜV SÜD certified), Enclosure Type 3/4X/12/13 (NEMA250)
	Operating ambient temperature		-20°C to +55C° -4°F to 131°F (No freezing)
	Operating relative humidity		5% to 95%RH
	Storage temperature		-25°C to +70°C -13°F to 158°F (No freezing)* ⁹
	Storage relative humidity		5% to 95%RH
	Vibration resistance		10 to 55 Hz, Double amplitude 2.0 mm 0.08", 5 minutes in each of the X, Y, and Z directions (IEC 60947-5-3)
	Shock resistance		30 G in X, Y, Z directions 6 times each axis (IEC 60947-5-3)
Material	Sensor main unit	Case	SUS304, PPS, PBT, PAR, PA66, NBR
		Lock	Aluminum alloy, Zinc die cast (Nickel chrome plating)
		Cable	PVC
	Actuator	Case	PPS, PBT, NBR
		Lock	Aluminum alloy, SUS303
Weight			Approx. 380 g

*1 Risk time according to IEC60947-5-3 is 150 ms + 2 ms × (number of units cascaded -1).

*2 If the OSSD operation is open/close link mode, Detect→ Not detect: 20 ms + 2 ms × (number of units cascaded -1), Not detect → Detect: 30 ms + 25 ms × (number of units cascaded -1)

*3 430 ms when locked at the same time the actuator is detected.

*4 Acceptable door operation frequency is 3 Hz if the OSSD operation is open/close link mode. In that case, operation distance is $S_{ao}(\text{OFF} \rightarrow \text{ON}) = 3 \text{ mm } 0.12"$, $S_{ar}(\text{OFF} \rightarrow \text{ON}) = 10.5 \text{ mm } 0.41"$.

*5 Do not apply excessive torque (0.45N·m or higher).

*6 The number of AUX outputs is 1 when the OSSD operation is open/close link mode.

*7 The number of OSSD operation switching inputs is 1 when the OSSD operation is lock link mode.

*8 Power consumption temporarily increases (Max. 10.5 W, Approx. 0.2 s) when the lock control input(s) is(are) turned ON. After that, current consumption will be within the specification.


*9 When stored for a long period of time, please store it at a temperature of 55°C 131°F or lower.


Dimensions

* Download CAD file or product manual for larger image/text and more detail.

Sensor + Actuator
(Installed facing front)


GS-51PC/53PC/71PC/73PC+GS-B21

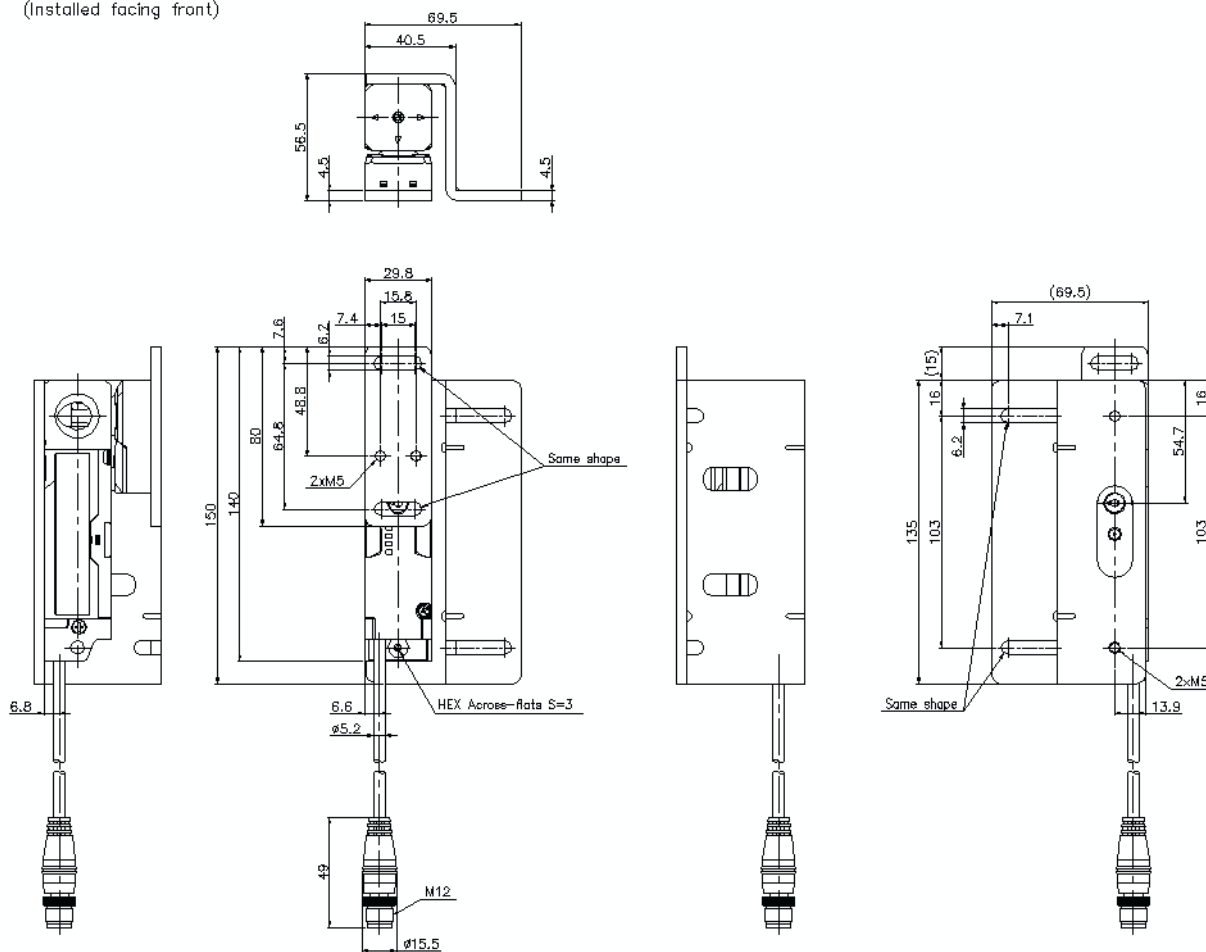

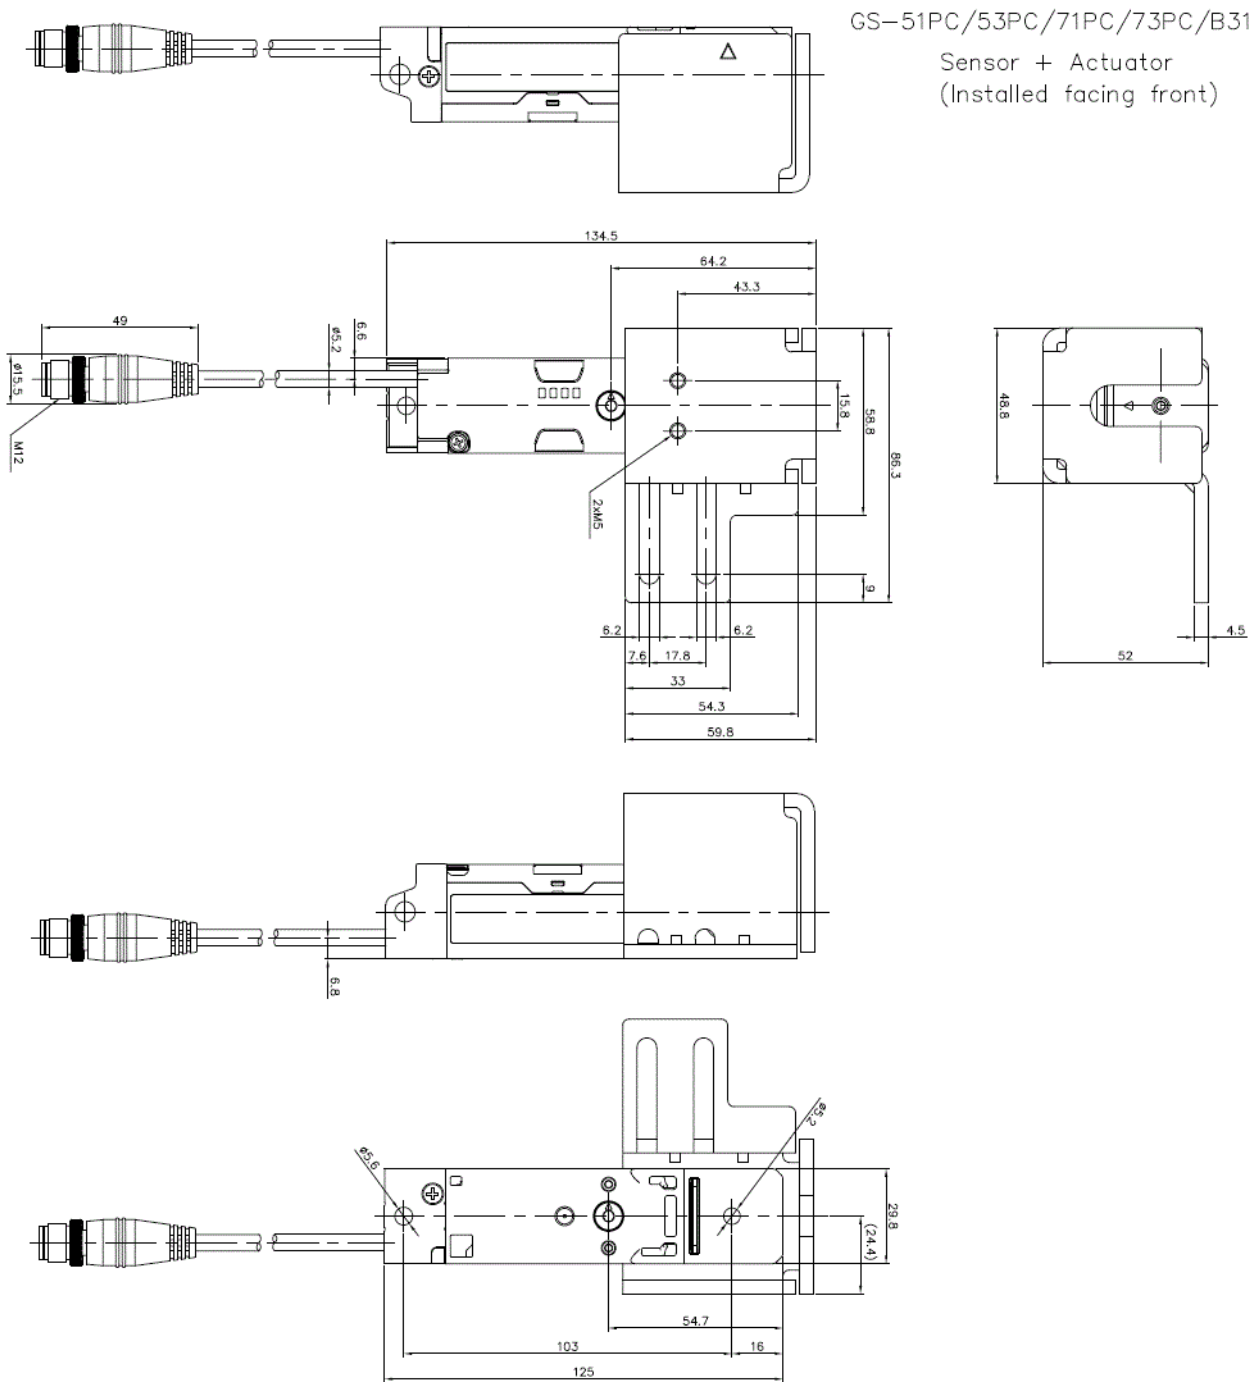


Sensor + Actuator
(Installed facing right)

GS-51PC/53PC/71PC/73PC+GS-B33

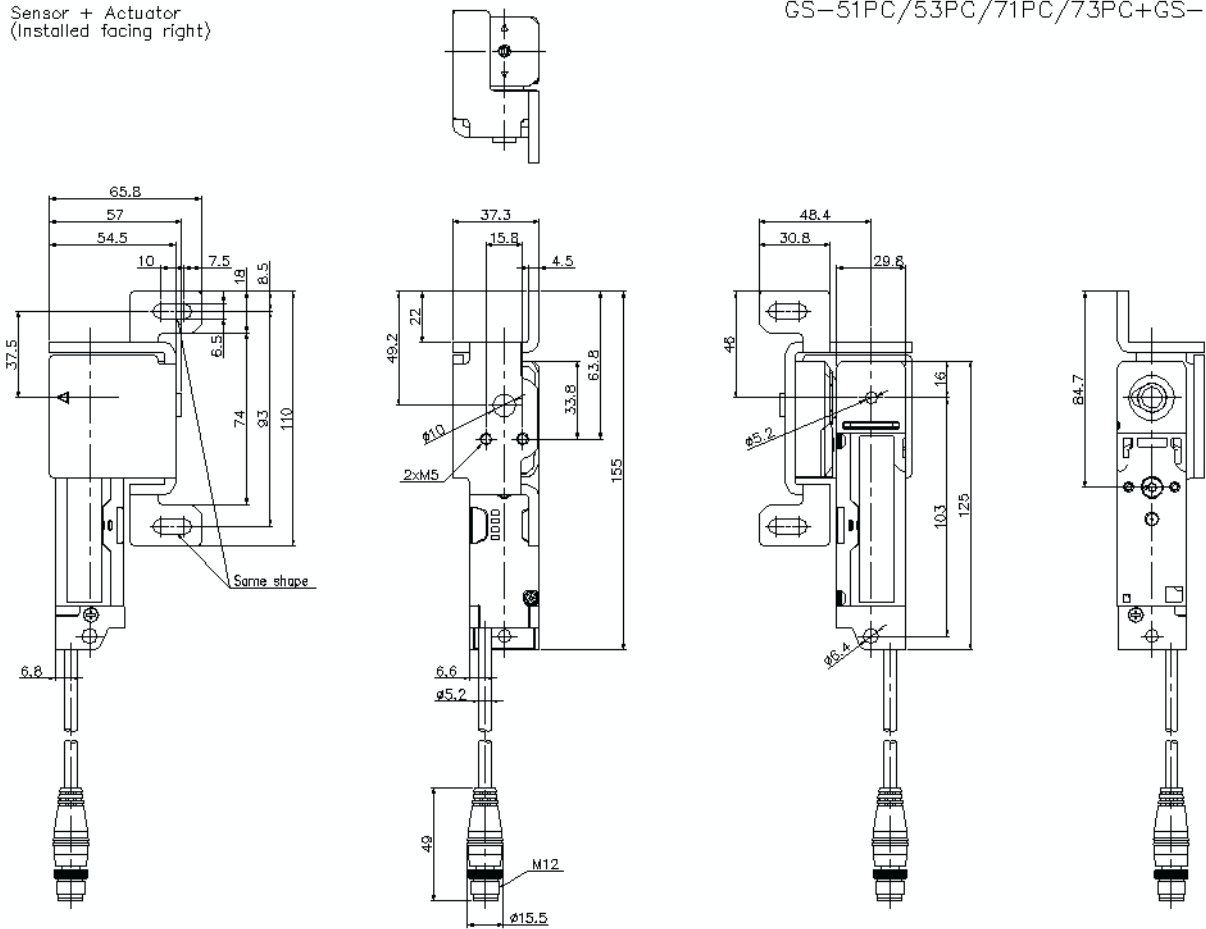


Sensor + Actuator
(Installed facing front)



Sensor + Actuator
(Installed facing left)


GS-51PC/53PC/71PC/73PC+GS-B43

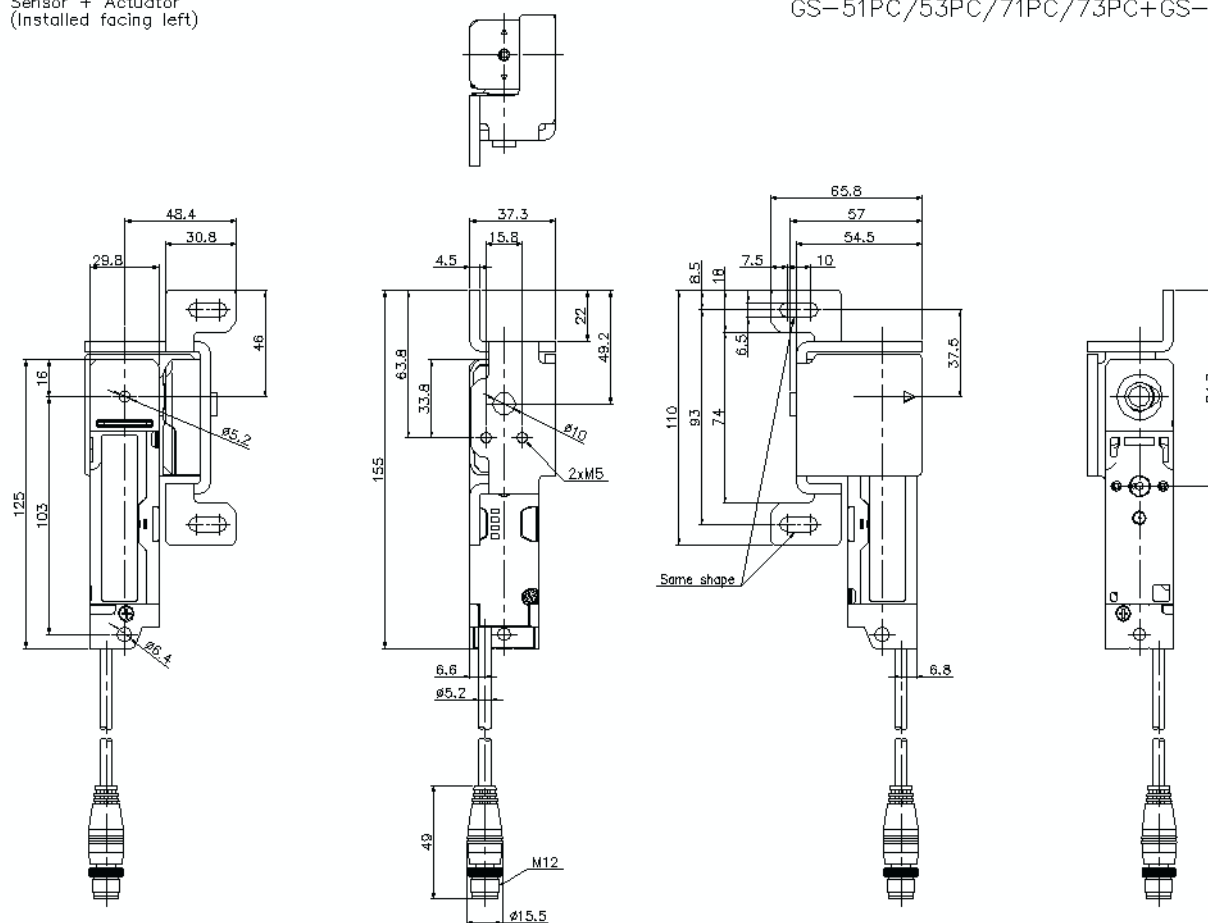


GS-51PC/53PC/71PC/73PC

Actuator


Upper, lower, left, and
right range of bolt motion: 2

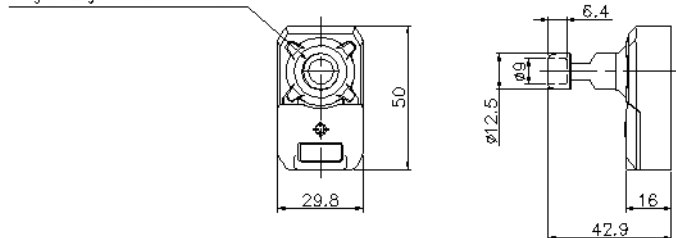

Without the cover

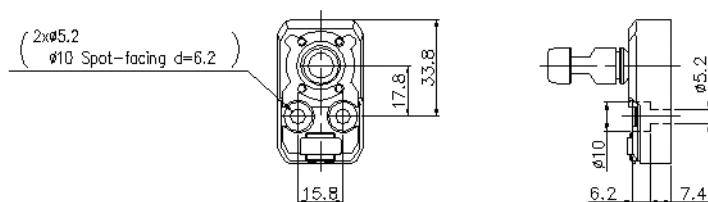

Sensor
(Installed facing front)

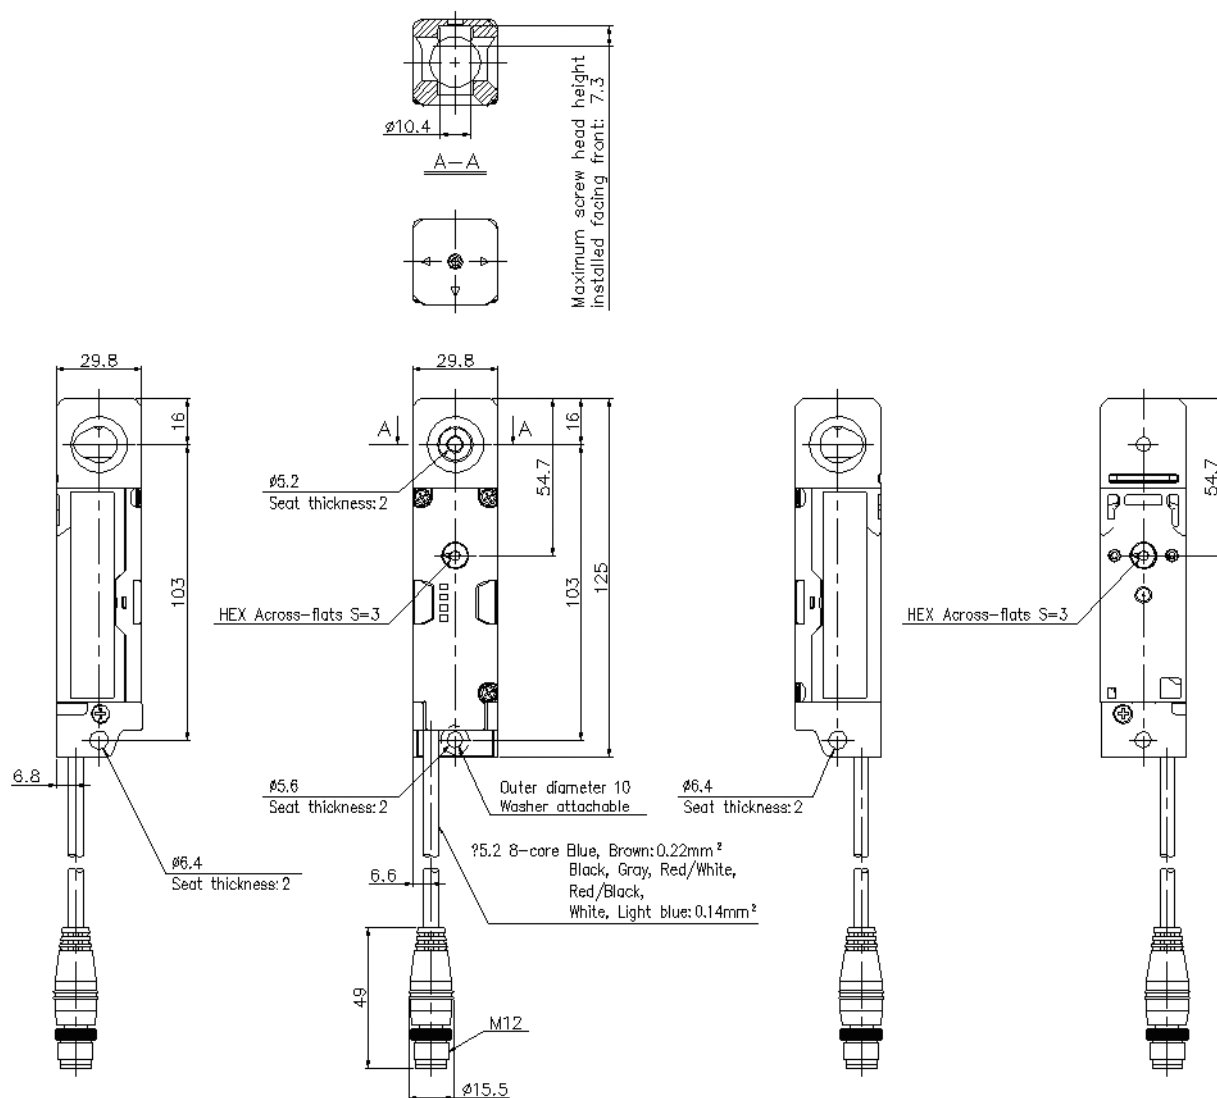

Technical drawing of the M12 connector showing front, side, and detail views with dimensions and material specifications.

Top View (Front): Shows the circular M12 connector head with a diameter of $\phi 10.4$. The maximum screw head height installed facing right is 6.2. The view is labeled A-A.

Side View: Shows the profile of the connector with a total length of 125. The distance from the top of the connector to the center of the M12 screw is 54.7. The distance from the top of the connector to the center of the 8-core cable is 6.6. The distance from the top of the connector to the center of the M12 screw is 29.8. The distance from the top of the connector to the center of the 8-core cable is 29.8. The distance from the top of the connector to the center of the M12 screw is 16. The distance from the top of the connector to the center of the 8-core cable is 103. The distance from the top of the connector to the center of the M12 screw is 6.8. The distance from the top of the connector to the center of the 8-core cable is 49. The distance from the top of the connector to the center of the M12 screw is $\phi 15.5$. The distance from the top of the connector to the center of the 8-core cable is M12.

Detail View (Right): Shows the 8-core cable with a diameter of $\phi 5.2$ and a seat thickness of 2. The distance from the top of the connector to the center of the 8-core cable is 29.8. The distance from the top of the connector to the center of the 8-core cable is 16. The distance from the top of the connector to the center of the 8-core cable is 103. The distance from the top of the connector to the center of the 8-core cable is 6.8. The distance from the top of the connector to the center of the 8-core cable is 49. The distance from the top of the connector to the center of the 8-core cable is $\phi 15.5$. The distance from the top of the connector to the center of the 8-core cable is M12.


Material Specifications:

- 8-core Blue, Brown: 0.22mm²
- Black, Gray, Red/White, Red/Black, White, Light blue: 0.14mm²


Other Dimensions:

- HEX Across-flats S=3
- Outer diameter 10 Washer attachable
- Seat thickness: 2

Sensor
(Installed facing left)

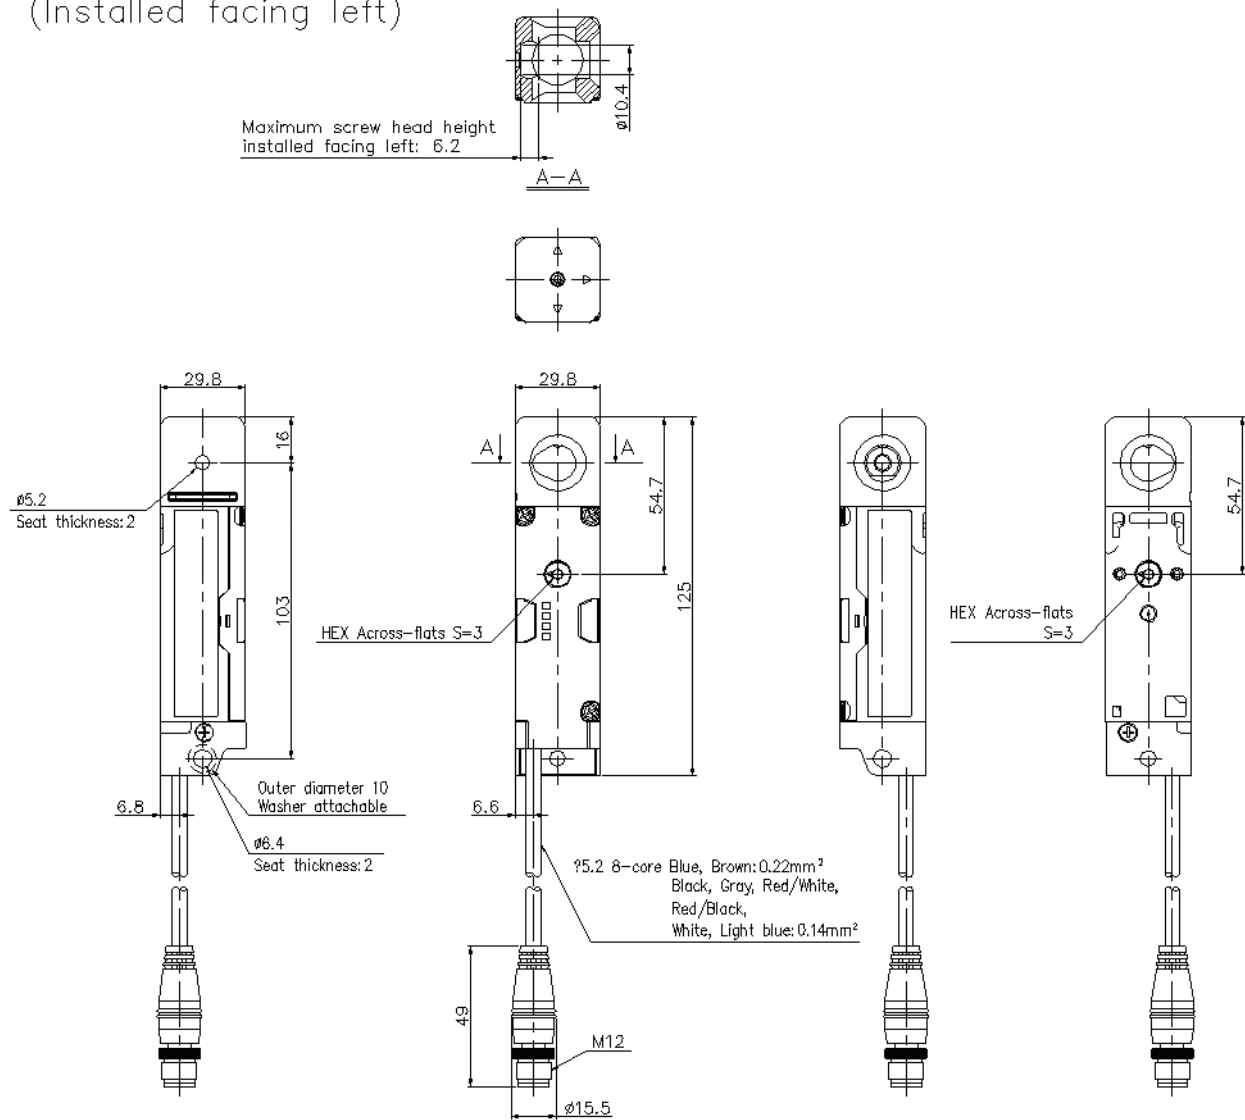

Sensor + Actuator
(Installed facing front)

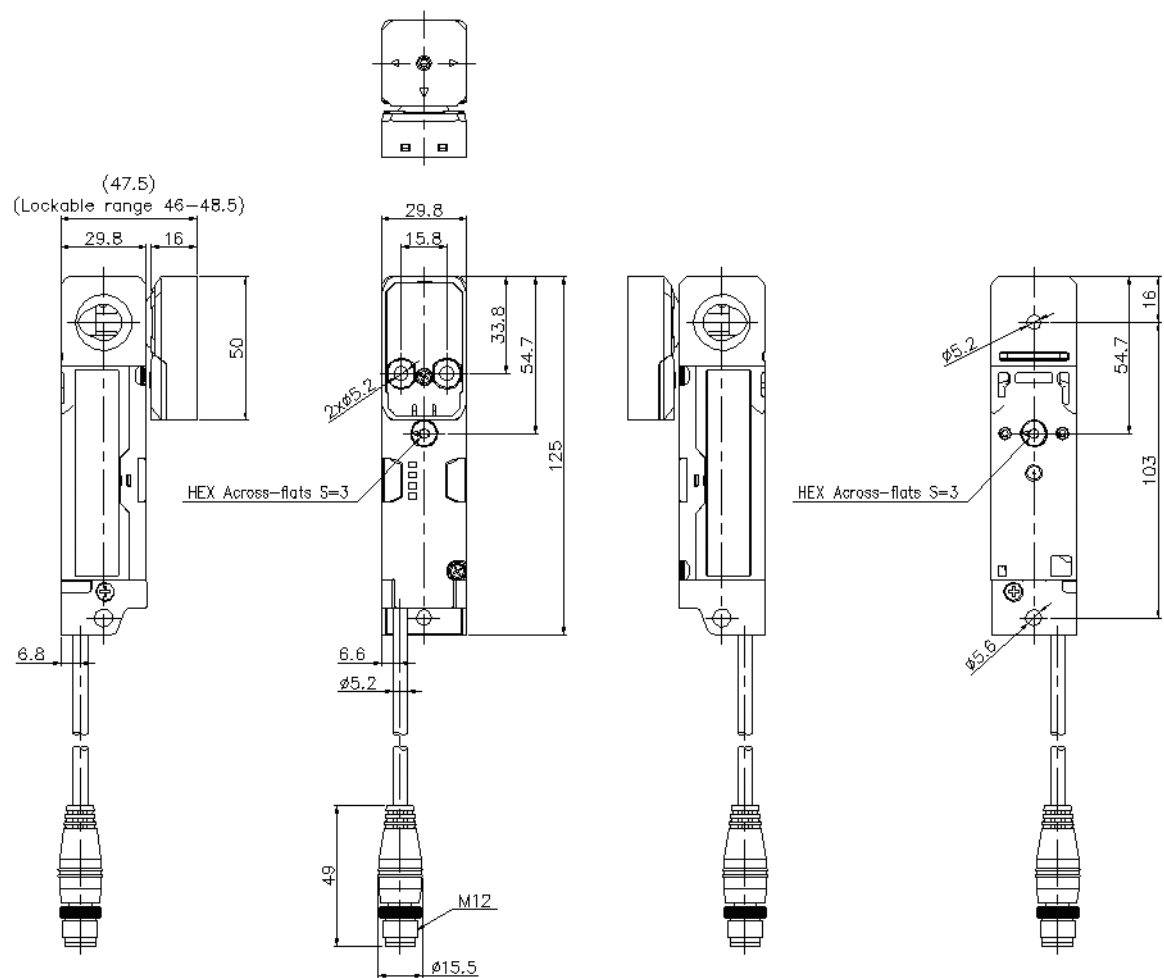

Sensor + Actuator
(Installed facing right)

