

Technical data sheet Interconnection cable

Part no.: 50141462

KDS PL-M12-5A-M12-5A-P0-020

Contents

- Technical data
- Electrical connection

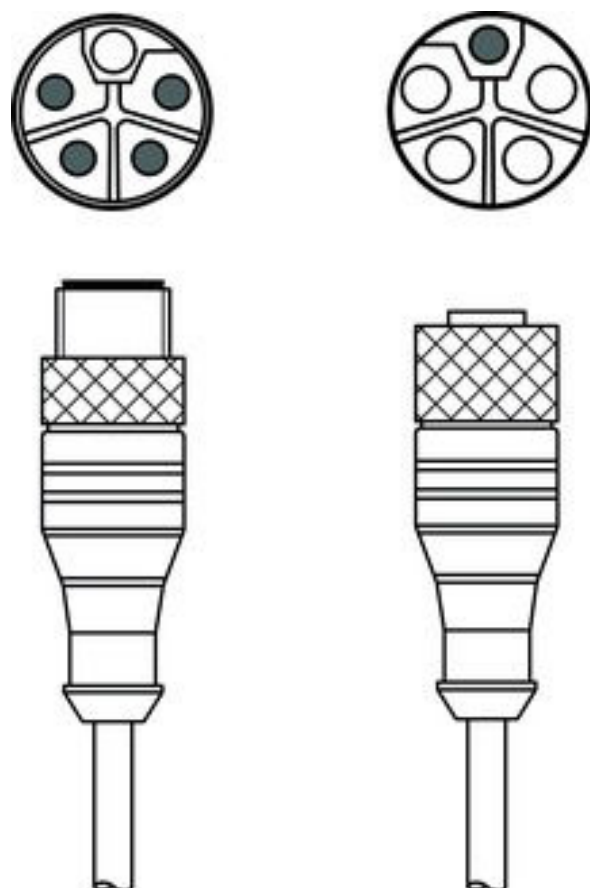


Figure can vary



Technical data

Basic data

Suitable for	MD 748i
--------------	---------

Electrical data

Performance data

Operating voltage	50 V AC / 60 V DC
Rated operating current	1,600 mA

Connection

Connection 1

Type of connection	Connector
Thread size	M12
Type	Male
No. of pins	5 -pin
Encoding	L-coded
Design	Axial

Connection 2

Type of connection	Connector
Thread size	M12
Type	Female
No. of pins	5 -pin
Encoding	L-coded
Design	Axial

Cable properties

Number of conductors	5 Piece(s)
Wire cross section	1.5 mm ²
Sheathing color	Gray
Shielded	No
Silicone-free	Yes
Cable diameter (external)	2.35 mm
Cable length	2,000 mm
Sheathing material	PUR
Suitability for drag chains	Yes
Traverse rate	Max. 3.3 m/s with horiz. traverse path of 5m and max. acceleration of 5m/s ²

Environmental data

Ambient temperature, operation, flexible use	-30 ... 90 °C
--	---------------

Ambient temperature, operation, stationary use	-40 ... 90 °C
--	---------------

Certifications

Degree of protection	IP 65
	IP 67
	IP 69K
Certifications	c UL US

Classification

Customs tariff number	85444290
eCl@ss 8.0	27279218
eCl@ss 9.0	27060311
ETIM 5.0	EC001855
ETIM 6.0	EC001855

Electrical connection

Connection 1

Type of connection	Connector
Thread size	M12
Type	Male
No. of pins	5 -pin
Encoding	L-coded
Design	Axial

Pin

1	Brown
2	White
3	Blue
4	Black
5	Gray

Conductor color

Electrical connection

Connection 2

Type of connection	Connector
Thread size	M12
Type	Female
No. of pins	5 -pin
Encoding	L-coded
Design	Axial