

## Technical data sheet

### Throughbeam photoelectric sensor

Part no.: 50134595

LE5/4-M8.3



Figure can vary

#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Further information
- Accessories



## Technical data

### Basic data

|                     |                       |
|---------------------|-----------------------|
| Series              | 5                     |
| Operating principle | Throughbeam principle |
| Device type         | Receiver              |

### Optical data

|                       |                            |
|-----------------------|----------------------------|
| Operating range       | Guaranteed operating range |
| Operating range       | 0 ... 10 m                 |
| Operating range limit | Typical operating range    |
| Operating range limit | 0 ... 15 m                 |

### Electrical data

|                    |                              |
|--------------------|------------------------------|
| Protective circuit | Polarity reversal protection |
|                    | Short circuit protected      |

### Performance data

|                      |                                        |
|----------------------|----------------------------------------|
| Supply voltage $U_B$ | 10 ... 30 V, DC, Incl. residual ripple |
| Residual ripple      | 0 ... 15 %, From $U_B$                 |
| Open-circuit current | 0 ... 15 mA                            |

### Outputs

|                                     |            |
|-------------------------------------|------------|
| Number of digital switching outputs | 1 Piece(s) |
|-------------------------------------|------------|

### Switching outputs

|                         |                        |
|-------------------------|------------------------|
| Voltage type            | DC                     |
| Switching current, max. | 100 mA                 |
| Switching voltage       | high: $\geq(U_B - 2V)$ |
|                         | Low: $\leq 2V$         |

### Switching output 1

|                     |                     |
|---------------------|---------------------|
| Assignment          | Connection 1, pin 4 |
| Switching element   | Transistor, PNP     |
| Switching principle | Light switching     |

### Timing

|                     |        |
|---------------------|--------|
| Switching frequency | 500 Hz |
| Response time       | 1 ms   |
| Readiness delay     | 300 ms |

### Connection 1

|                    |                |
|--------------------|----------------|
| Function           | Signal OUT     |
|                    | Voltage supply |
| Type of connection | Connector      |
| Thread size        | M8             |
| Type               | Male           |
| Material           | Plastic        |
| No. of pins        | 3 -pin         |

### Mechanical data

|                       |                           |
|-----------------------|---------------------------|
| Dimension (W x H x L) | 14 mm x 32.5 mm x 20.2 mm |
| Housing material      | Plastic, ABS              |
| Lens cover material   | Plastic                   |
| Net weight            | 20 g                      |
| Housing color         | Black                     |
|                       | Red                       |

### Operation and display

|                 |            |
|-----------------|------------|
| Type of display | LED        |
| Number of LEDs  | 2 Piece(s) |

### Environmental data

|                                |               |
|--------------------------------|---------------|
| Ambient temperature, operation | -40 ... 60 °C |
| Ambient temperature, storage   | -40 ... 70 °C |

### Certifications


|                      |               |
|----------------------|---------------|
| Degree of protection | IP 67         |
| Protection class     | III           |
| Certifications       | c UL US       |
| Standards applied    | IEC 60947-5-2 |

### Classification

|                       |          |
|-----------------------|----------|
| Customs tariff number | 85365019 |
| eCl@ss 8.0            | 27270901 |
| eCl@ss 9.0            | 27270901 |
| ETIM 5.0              | EC002716 |
| ETIM 6.0              | EC002716 |

Dimensioned drawings

All dimensions in millimeters

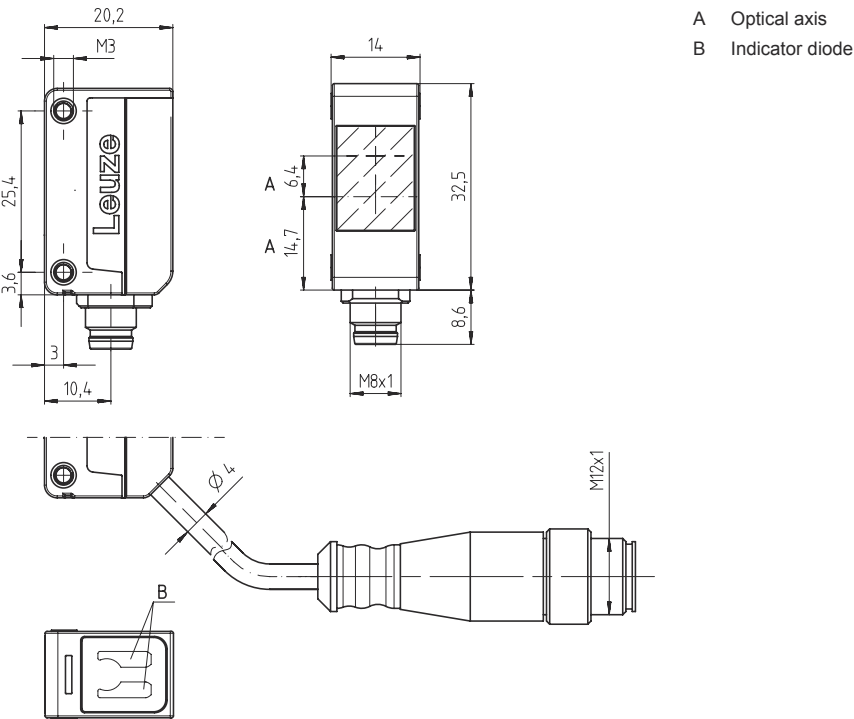


Electrical connection

Connection 1



|                    |                |
|--------------------|----------------|
| Function           | Signal OUT     |
|                    | Voltage supply |
| Type of connection | Connector      |
| Thread size        | M8             |
| Type               | Male           |
| Material           | Plastic        |
| No. of pins        | 3 -pin         |

| Pin | Pin assignment |
|-----|----------------|
| 1   | V+             |
| 3   | GND            |
| 4   | OUT 1          |



Diagrams

Typ. response behavior

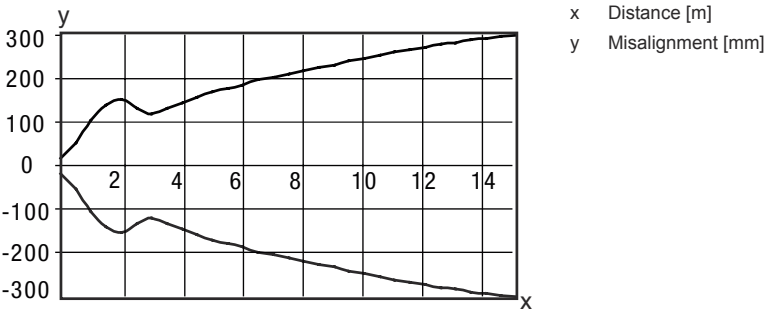

Operation and display

| LED | Display                  | Meaning               |
|-----|--------------------------|-----------------------|
| 1   | Yellow, continuous light | Light path free       |
|     | Yellow, flashing         | No function reserve   |
| 2   | Green, continuous light  | Operational readiness |

Suitable transmitters

|                                                                                     | Part no. | Designation | Article                                      | Description                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------|----------|-------------|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50117695 | LS5/9D-M8   | Throughbeam photoelectric sensor transmitter | Operating range limit: 0 ... 15 m<br>Light source: LED, Red<br>Supply voltage: DC<br>Deactivation inputs: 2 Piece(s)<br>Connection: Connector, M8, Plastic, 4 -pin<br>Special design: Deactivation input |
|  | 50134594 | LS5/X-M8.3  | Throughbeam photoelectric sensor transmitter | Operating range limit: 0 ... 15 m<br>Light source: LED, Red<br>Supply voltage: DC<br>Connection: Connector, M8, Plastic, 3 -pin                                                                          |
|  | 50134585 | LS5/XX-M8   | Throughbeam photoelectric sensor transmitter | Operating range limit: 0 ... 15 m<br>Light source: LED, Red<br>Supply voltage: DC<br>Connection: Connector, M8, Plastic, 4 -pin                                                                          |

## Part number code

Part designation: **AAA5d.EE/ ff-GG-hh-I**

|             |                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AAA5</b> | <b>Operating principle / construction</b><br>HT5: diffuse reflection sensor with background suppression<br>LS5: throughbeam photoelectric sensor transmitter<br>LE5: throughbeam photoelectric sensor receiver<br>ET5: energetic diffuse reflection sensor<br>FT5: diffuse reflection sensor with fading<br>PRK5: retro-reflective photoelectric sensor with polarization filter                                        |
| <b>d</b>    | <b>Light type</b><br>n/a: red light<br>I: infrared light                                                                                                                                                                                                                                                                                                                                                                |
| <b>EE</b>   | <b>Equipment</b><br>1: adjustable range<br>M: for semi-transparent objects<br>H: for the detection of transparent films<br>X: reinforced fading<br>3: teach-in via button<br>R: combination product for reflector DTKS 30x50                                                                                                                                                                                            |
| <b>ff</b>   | <b>Switching output / function / OUT1OUT2 (OUT1 = pin 4, OUT2 = pin 2)</b><br>2: NPN transistor output, light switching<br>N: NPN transistor output, dark switching<br>4: PNP transistor output, light switching<br>P: PNP transistor output, dark switching<br>X: pin not used<br>9: deactivation input (deactivation with high signal)<br>D: deactivation input (deactivation with low signal)                        |
| <b>GG</b>   | <b>Design</b><br>P1: narrow light beam                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>hh</b>   | <b>Electrical connection</b><br>n/a: cable, standard length 2000 mm, 4-wire<br>M8: M8 connector, 4-pin (plug)<br>M8.3: M8 connector, 3-pin (plug)<br>200-M8: cable, length 200 mm with M8 connector, 4-pin, axial (plug)<br>200-M8.3: cable, length 200 mm with M8 connector, 3-pin, axial (plug)<br>200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug)<br>M8.1: Snap-in, M8 connector, 4-pin (plug) |
| <b>I</b>    | <b>Configuration</b><br>P1: different configuration                                                                                                                                                                                                                                                                                                                                                                     |

### Note



A list with all available device types can be found on the Leuze website at [www.leuze.com](http://www.leuze.com).

## Notes



### Observe intended use!



- ⚡ This product is not a safety sensor and is not intended as personnel protection.
- ⚡ The product may only be put into operation by competent persons.
- ⚡ Only use the product in accordance with its intended use.

### For UL applications:



- ⚡ Only for use in "class 2" circuits
- ⚡ These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

## Further information

- Sum of the output currents for both outputs, 50 mA for ambient temperatures > 40 °C

## Accessories

### Connection technology - Connection cables

|                                                                                   | Part no. | Designation       | Article          | Description                                                                                                                                        |
|-----------------------------------------------------------------------------------|----------|-------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50130832 | KD U-M8-3A-V1-050 | Connection cable | Connection 1: Connector, M8, Axial, Female, 3 -pin<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC  |
|  | 50130862 | KD U-M8-3W-V1-050 | Connection cable | Connection 1: Connector, M8, Angled, Female, 3 -pin<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC |

### Mounting technology - Mounting brackets

|                                                                                     | Part no. | Designation   | Article             | Description                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------|----------|---------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50118542 | BT 200M.5     | Mounting bracket    | Design of mounting device: Angle, L-shape<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Screw type, Suited for M3 screws<br>Type of mounting device: Adjustable<br>Material: Stainless steel |
|   | 50124651 | BT 205M-10SET | Mounting device set | Design of mounting device: Angle, L-shape<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Rigid<br>Material: Metal                                      |

### Mounting technology - Rod mounts

|                                                                                     | Part no. | Designation  | Article         | Description                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------|----------|--------------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50117829 | BTP 200M-D12 | Mounting system | Design of mounting device: Protection hood<br>Fastening, at system: For 12 mm rod<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Clampable, Adjustable, Turning, 360°<br>Material: Metal |

**Accessories**

|                                                                                   | Part no. | Designation  | Article         | Description                                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------------|----------|--------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50117255 | BTU 200M-D12 | Mounting system | Design of mounting device: Mounting system<br>Fastening, at system: For 12 mm rod, Sheet-metal mounting<br>Mounting bracket, at device: Screw type, Suited for M3 screws<br>Type of mounting device: Clampable, Adjustable, Turning, 360°<br>Material: Metal |

**Note**

🔗 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.