

# AHS

## AHS/CP-3F

**Ind.d6,5,PNP-NC,M8 plug,Sch-LD**

**Ø 6.5 MM CYLINDRICAL MINIATURIZED INDUCTIVE SENSORS**

# OVERVIEW

# TECHNICAL FEATURES

Detection properties

| | |
|---|---|
| Nominal sensing distance | 2mm |
| Operanting distance | 0…1,62mm |
| Standard target | 6,5x6,5mm FE360 |
| Correction Factor | copper: 0,05 ± 10% / aluminium: 0,05 ± 10% / brass: 0,10 ± 10% / stainless steel: 0,50 ± 10% |
| Thermal drift of Sr | < 10% |
| Repeat Accuracy | < 5% (UB 24V Ta=23°C ±5°C) |
| Hysteresis | 1 … 20% |

## Application

| | |
|---|---|
| Description | Ø6,5 mini flush mount |
| Functions | Proximity |

## Outputs

| | |
|---|---|
| Output type | PNP |
| Output Function | NC |
| Switching frequency | 7kHz |

## Electrical data

| | |
|---|---|
| Operating Voltage | 10...30Vdc |
| No-Load supply current | ≤ 10mA |
| Load current | ≤ 100mA |
| Leakage current | ≤ 10μA |
| Output voltage drop | ≤ 1,5V @100mA |
| Max ripple content | ≤ 10% |
| LED indicators | Yellow LED output state |
| Time delay before availability | ≤ 50ms |
| Short-circuit protection | Yes |
| Reverse Polarity Protection | Yes |

| | |
|---|---|
| Impulsive Overvoltage Protection | Yes |
| Protection against inductive loads | Yes |

Mechanical data

| | |
|---|---|
| Dimensions | Ø6,5 / L = 29,4mm |
| Mounting | Shielded |
| Material | AISI303 Stainless Steel |
| Housing material | AISI303 Stainless Steel |
| Weight | 4g |
| Connections | M8 Plug |
| Active Head Material | PBT |
| Operating temperature | -25°C…+70°C |
| Diameter/Dimension | Ø6,5 |

Test/Approvals

| | |
|---|---|
| Approvals | CE cULus |
| EMC compatibility | IEC 60947-5-2 |
| Shocks and vibrations | Vibration IEC 60068-2-6 / Shock IEC 60068-2-27 |
| Degree of protection | IP67 |


Generical Data

| | |
|---|---|
| Dimensions | Ø6,5 / L = 29,4mm |


| | |
|---|---|
| Operating Temperature | -25°C…+70°C |
| Mechanical Protection | IP67 |

# CONNECTIONS

Eletrical diagram

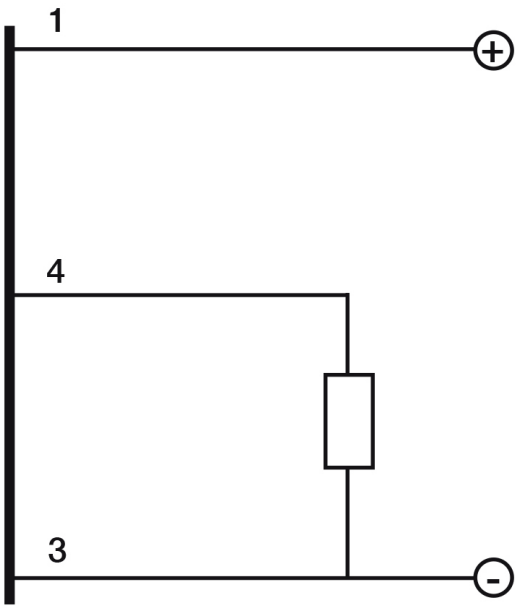



Connector





# OTHERS


Dimensions

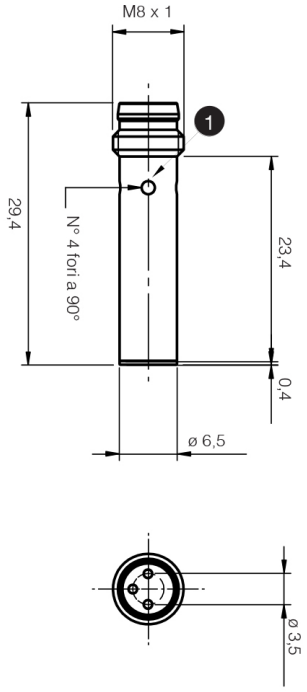


Response curves

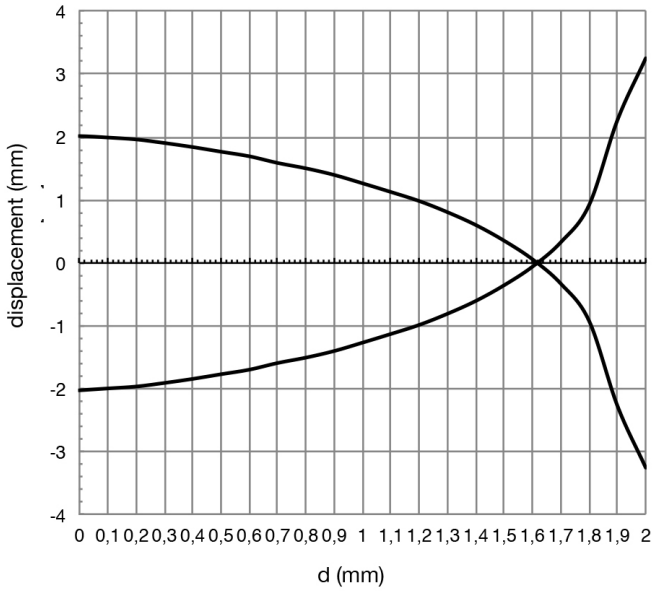


## Installation

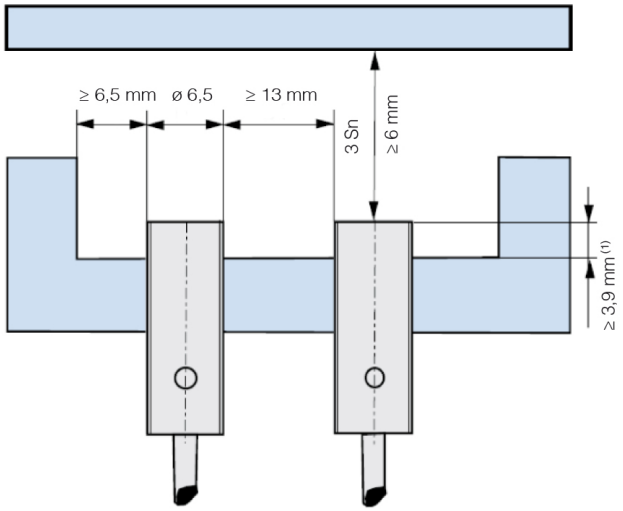


(1) ≥ 4,5 mm without ferro-magnetic material

**Datasensing S.r.l.**
Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**date of printing**
04/11/2026
10:54:29