

# FQ

# FQRL/BP-2E

**Photo.M18,PNP-NO+NC,M12 plug,Reflex**

**M18 PHOTOELECTRIC SENSORS WITH SHORT BODY**

## OVERVIEW

- Wide range of models: direct diffuse, retro-reflective, polarized and fixed-focus
- Direct diffuse models with short and long sensing distance, polarized and through beam
- Nickel brass or plastic housing
- NO+NC complementary output
- P67 protection degree
- Complete protection against electrical damages
- Approvals: CE

CE

## TECHNICAL FEATURES

Detection properties

| | |
|---|---|
| Nominal sensing distance | 1,5m |
| Thermal drift of Sr | ≤10% Sr |
| Repeat Accuracy | 5% |
| Sensitivity adjustment | Trimmer |
| Minimum sensing distance (blind | 0,1m |

| | |
|---|---|
| zone) | |

Application

| | |
|---|---|
| Function Principle | For transparent objects |
| Notes | On RL113G or RL116 reflector |
| Optic position | Radial 90° |

Outputs

| | |
|---|---|
| Output type | PNP NO+NC |
| Output Function | NO+NC |
| Switching frequency | 250Hz |
| Response time | 2ms |

Electrical data

| | |
|---|---|
| Operating Voltage | 10…30VDC |
| No-Load supply current | ≤ 30mA |
| Load current | ≤50mA |
| Leakage current | ≤10μA |
| Output voltage drop | ≤2V@Iload=50mA |
| Max ripple content | ≤10% |
| LED indicators | Yellow (status output) |
| Time delay before availability | ≤200ms |

| | |
|---|---|
| Short-circuit protection | Short circuit (autoreset), Overvoltage |
| Reverse Polarity Protection | Polarity inversal, Inpulsive voltage |
| Emission | LED Red (660nm) |
| Interference to external light | 5000lux (incandescent lamp), 10000lux (sunlight) |

Mechanical data

| | |
|---|---|
| Dimensions | M18 x 1/L=76,3mm |
| Housing material | PBT / PC plug |
| Weight | 30g |
| Connections | M12 plug |
| Active Head Material | PC |
| Tightening torque | 1Nm |
| Operating temperature | - 25°C…+ 70° C (Without freeze) |
| Diameter/Dimension | M18 |

Test/Approvals

| | |
|---|---|
| Approvals | CE |
| EMC compatibility | EN 60947-5-2 |
| Shocks and vibrations | Vibration IEC 60068-2-6 / Shock IEC 60068-2-27 |
| Degree of protection | IP67 |

Accessories


| | |
|---|---|
| Supplied Accessories | nuts M18 x 1, screwdriver |

Generical Data


| | |
|---|---|
| Dimensions | M18 x 1/L=76,3mm |
| Operating Temperature | - 25°C…+ 70°C (Without freeze) |
| Mechanical Protection | IP67 |

# CONNECTIONS

Eletrical diagram

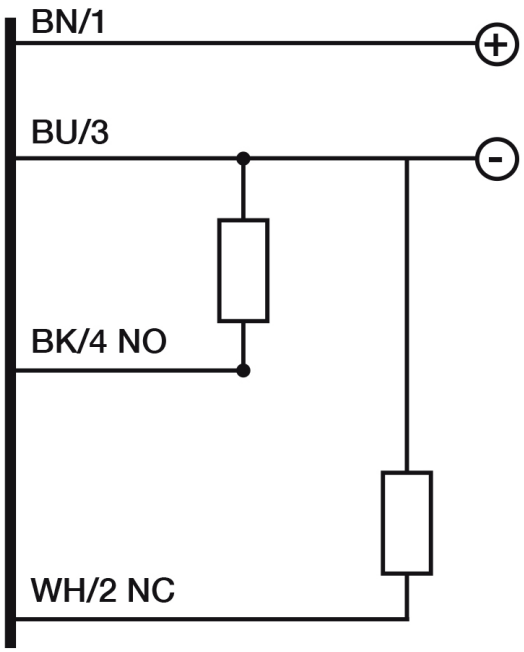




Connector

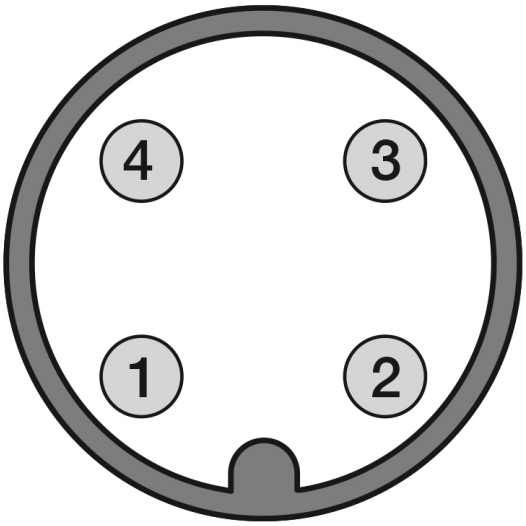



# OTHERS

Dimensions

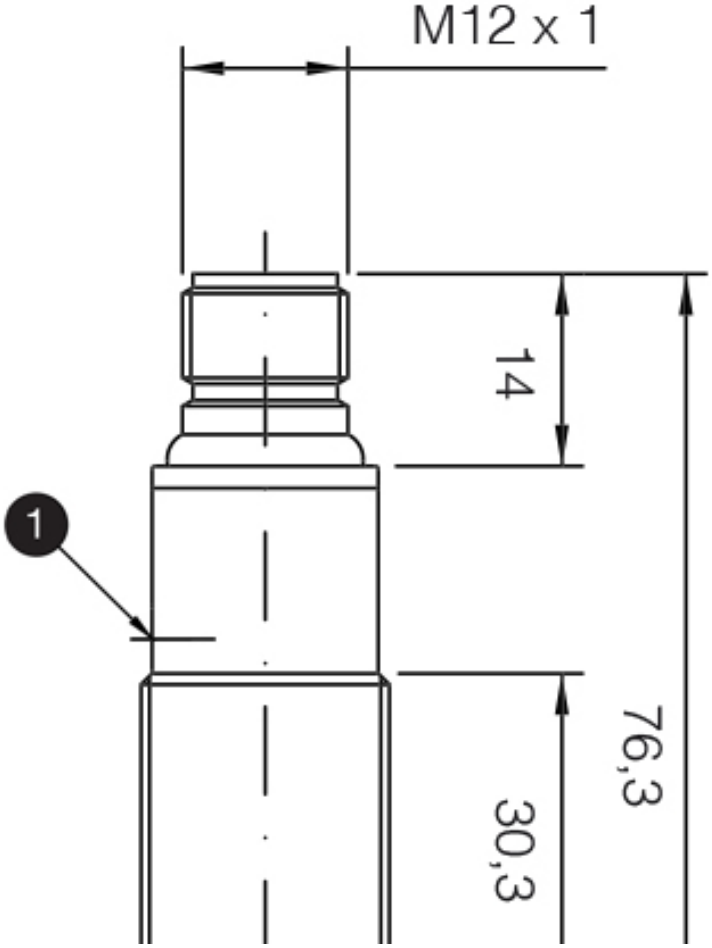

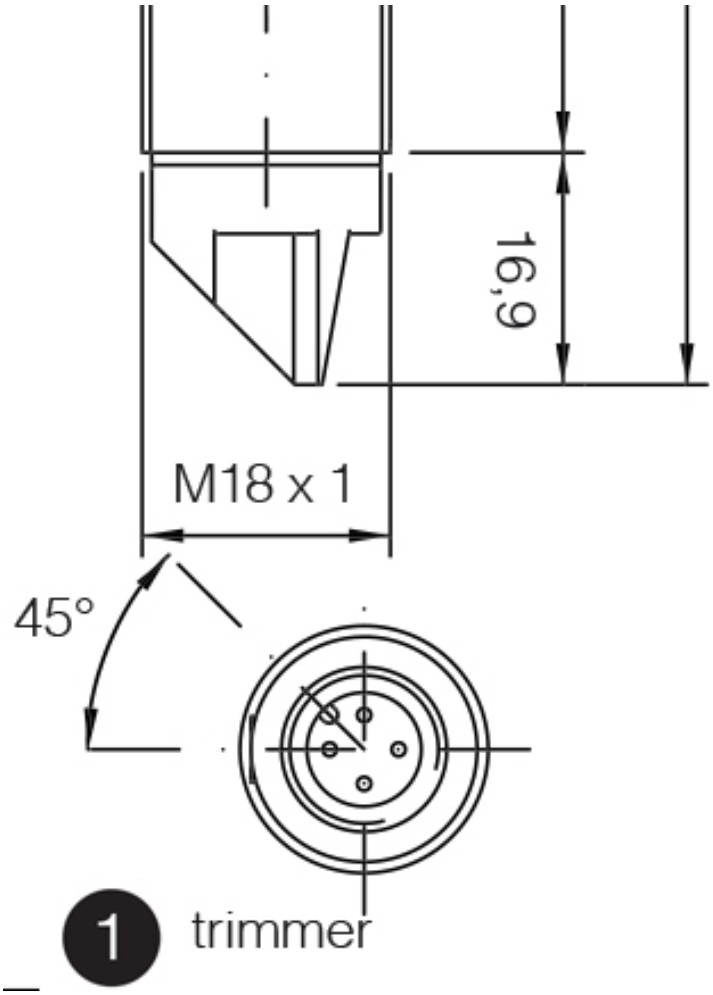


Response curves

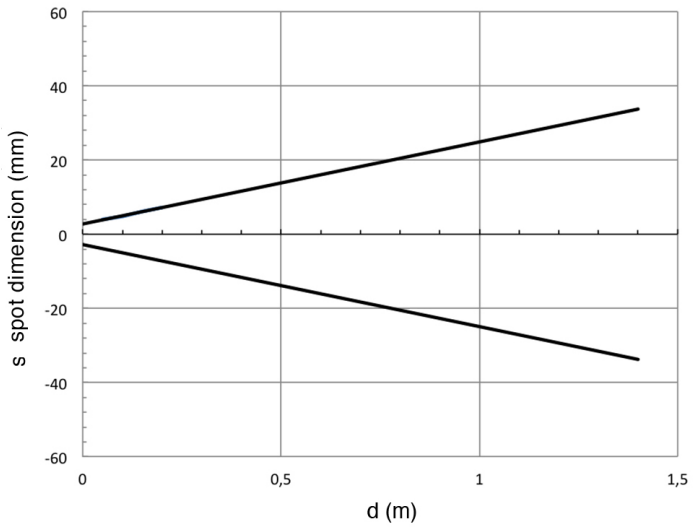

**S.r.l.**
Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail
info@datasensing.com

**printing**
04/11/2026
11:20:22