



Model Number


ASK /70 KL.2000MM

Female cordset, M9, 5-pin, cable

Features

- UL Recognized Component
- Screw lock
- Degree of protection IP67


Dimensions

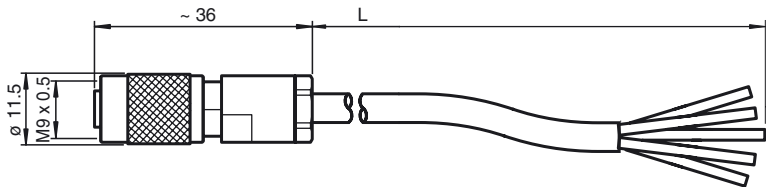

Technical data

General specifications		
Number of pins		5
Electrical specifications		
Operating voltage	U _B	max. 125 V DC
Test voltage		> 1500 V _{eff} AC
Operating current	I _B	max. 3 A
Volume resistance		< 3 mΩ
Ambient conditions		
Ambient temperature		-40 ... 85 °C (-40 ... 185 °F)
Pollution Degree		1
Mechanical specifications		
Contact elements		spring-loaded contact socket
Pin diameter		1 mm
Degree of protection		IP67
Material		
Contacts		CuSn
Contact surface		Au
Body		PA 66 , black
Slotted nut		CuZn, nickel-plated
Cable		
Sheath diameter		Ø5.2 mm
Color		black
Cores		5 x 0.25 mm ²
Conductor construction		28 x 0.07 mm Ø
Length	L	2 m
Approvals and certificates		
UL approval		cURus AWM 20549 AWM I/II A/B 80°C 300V FT2 (cable)

Electrical connection

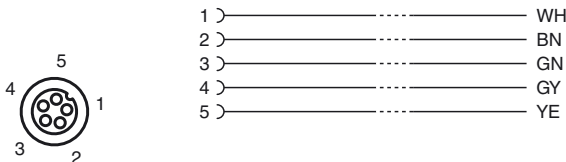

Release date: 2014-11-12 11:46 Date of issue: 2014-11-12 407254_eng.xml