



Model Number

HPF-T021-H  
Plastic fibre optics - thru beam

Series

|                        |                                       |
|------------------------|---------------------------------------|
| Fibre optic amplifiers |                                       |
| Device series          | SU-series (without SU15-G)<br>ML17-LL |

Description


**Attention:**  
Fibre optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



Technical data

|                           |   |                               |
|---------------------------|---|-------------------------------|
| General specifications    |   |                               |
| Fibre optic length        | l | 2000 mm                       |
| Fibre optic diameter      | d | 2.2 mm                        |
| End piece                 |   | Side view / Periscope         |
| Bend radius               |   | min. 25 mm                    |
| Approvals                 |   | CE                            |
| Standard conformity       |   |                               |
| Standards                 |   | EN 60947-5-2                  |
| Ambient conditions        |   |                               |
| Ambient temperature       |   | -30 ... 70 °C (243 ... 343 K) |
| Mechanical specifications |   |                               |
| Material                  |   |                               |
| Optical face              |   | plastic                       |
| Covering (Sheathing)      |   | PE                            |
| Core                      |   | plastic                       |
| End piece                 |   | metal                         |

Dimensions

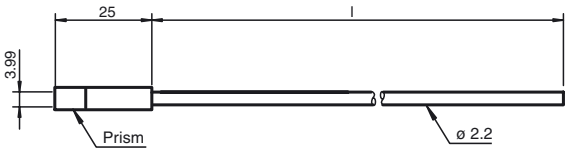

Release date: 2007-08-07 13:23 Date of issue: 2007-08-09 454137\_ENG.xml