RFID Transponder

IQC33-10 10pcs

- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- 16 kbit memory available
- 64 bit Fixcode
- Packaging unit: 10 pieces

Data carrier

CE

Dimensions





Technical Data

General specifications	
Operating frequency	13.56 MHz
Transfer rate	26 kBit/s
Memory	
Chip Type	FRAM MB89R118 (Fujitsu)
FRAM	16 kBit
UID	64 Bit
Memory organization	8 bytes/block
Read cycles	unlimited
Write cycles	unlimited
Data retention period	10 years
Directive conformity	
Radio equipment	
Directive 2014/53/EU	EN 300330
RoHS	
Directive 2011/65/EU (RoHS)	EN 50581

Release date: 2020-03-26 Date of issue: 2020-03-27 Filename: 263243_eng.pdf

ПРОМЭЛЕКТРОНИКА / sales@prom-elec.com

Technical Data

Standard conformity	
Degree of protection	EN 60529
RFID	ISO/IEC 15693-1 ISO/IEC 15693-2 ISO/IEC 15693-3 ISO/IEC 18000-3
Ambient conditions	
Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Degree of protection	IP67
Material	
Housing	PBT
Encapsulation compound	CY 221/HY 2966
Installation	
In metal	yes
On metal	yes
In air	yes
Construction type	Cylindrical
Note	Packaging unit, 10-piece

Reading range in air IQC33-10

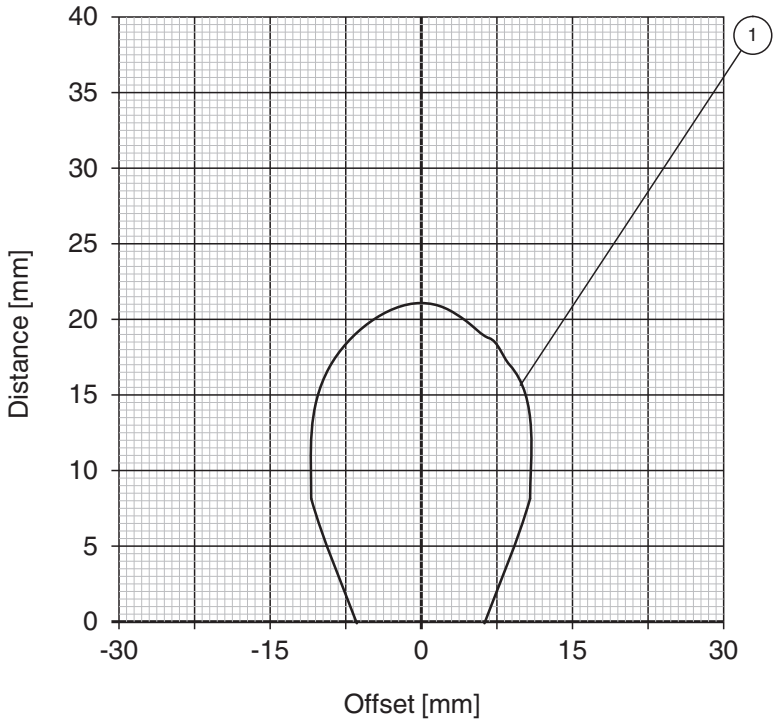

Release date: 2020-03-26 Date of issue: 2020-03-27 Filename: 263243_eng.pdf

1 IQH1-18GM-V1 2 IQH1-F61-V1 3 IQH1-FP-V1

4 IQH1-F15-V1

Release date: 2020-03-26 Date of issue: 2020-03-27 Filename: 263243_eng.pdf