



Model Number


L36/LV36-Ex/40b/116

NAMUR thru-beam sensor, large housing design, 30 m detection range, red light, light/dark on, DC version, NAMUR output, terminal compartment



Features

- ATEX approval for zone 1 (Gas)
- Intrinsically safe, Ex op is ia IIC T4 Gb
- Resistant against noise
- Adjustable sensitivity

Dimensions

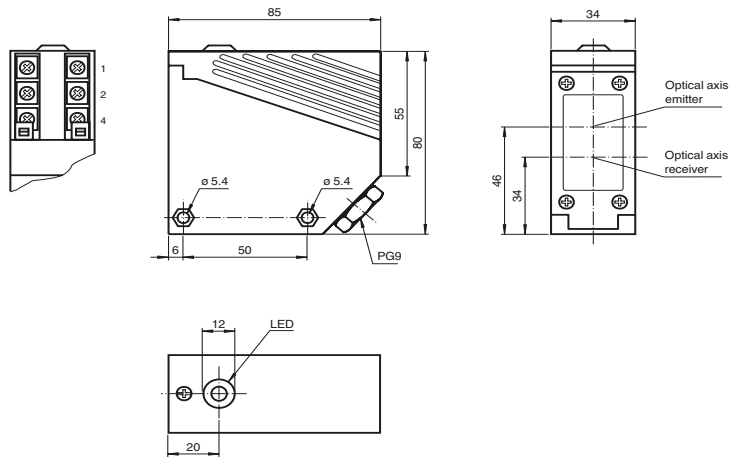

Electrical connection

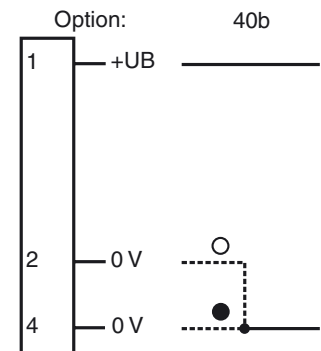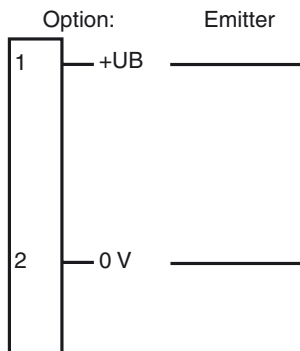

○ = Light on
● = Dark on

Technical data

General specifications

Effective detection range	0 ... 30 m
Threshold detection range	30 m
Light source	LED , 660 nm
Light type	modulated visible red light
Ambient light limit	≤ 10000 Lux sun light ≤ 7500 Lux halogen light

Functional safety related parameters

MTTF _d	509 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Indicators/operating means

Operation indicator	LED green: power on (emitter)
Function indicator	LED yellow: switching state (receiver)
Control elements	sensitivity adjustment

Electrical specifications

Operating voltage	U _B	6 ... 16 V DC (R _i approx. 0 Ohm)
Ripple		5 %
Time delay before availability	t _v	20 ms

Output

Switching type	light/dark on, programmable	
Signal output	1 NAMUR output NC/NO programmable	
Switching voltage	8 V DC (R _i approx. 1 kΩ)	
Switching frequency	f	≤ 100 Hz
Current consumption	Emitter: ≥ 2.2 mA , Receiver:	
Reference target detected	connection 1, 2: ≥ 2.2 mA connection 1, 4: ≤ 1 mA	
Reference target not detected	connection 1, 2: ≤ 1 mA connection 1, 4: ≥ 2.2 mA	
Response time	5 ms	

Directive conformity

Electromagnetic compatibility	
Directive 2014/30/EU	EN 60947-5-2:2007+A1:2012

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 80 °C (-40 ... 176 °F)

Mechanical specifications

Degree of protection	IP54
Connection	terminal compartment PG9, ≤ 2.5 mm ²
Material	
Housing	PMMA
Optical face	PMMA
Mass	200 g (device)

Compliance with standards and directives

Standard conformity	
Product standard	EN 60947-5-2
Standards	EN 60947-5-6:2000

Approvals and certificates

CCC approval	CCC approval / marking not required for products rated ≤36 V
--------------	--

Curves / Diagrams

