



Glass fiber optic - diffuse with metal covering
Threading M8

- Sturdy metallic version
- Chemical-resistant
- M8 x 1 thread


Device series	VL18LL VariKont M
---------------	----------------------

Fibre optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



Mechanical specifications	
Protection degree	IP40
Material	
Optical face	glass
Sheathing	metal
Core	Glass fiber
End piece	Stainless steel 1.4305 / AISI 303
Adapter	PBT
Extraction force	120 N

Dimensions

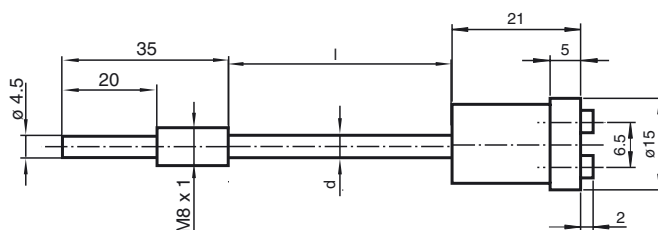

ПРОМЭЛЕКТРОНИКА / sales@prom-elec.com