


Inductive sensor
NBB0,6-5GS20-E2



- 0.6 mm flush
- Stainless steel housing



Dimensions




Technical Data

General specifications		
Switching function		Normally open (NO)
Output type		PNP
Rated operating distance	s _n	0.6 mm
Installation		flush
Output polarity		DC
Assured operating distance	s _a	0 ... 0.486 mm
Reduction factor r _{Al}		0.2
Reduction factor r _{Cu}		0.15
Reduction factor r ₃₀₄		0.6
Reduction factor r _{Brass}		0.25
Nominal ratings		
Installation conditions		
A		0 mm
B		0 mm
C		2 mm


Technical Data

F		5 mm
Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 5000 Hz
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 2 V
Operating current	I_L	0 ... 200 mA
Off-state current	I_r	0 ... 0.1 mA
No-load supply current	I_0	≤ 10 mA
Limit data		
Operating pressure		20 bar (290.1 psi)
Compliance with standards and directives		
Standard conformity		
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007
Approvals and certificates		
CCC approval		CCC approval / marking not required for products rated ≤ 36 V
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		cablE PUR 3 x 0.14 mm ² , 2 m
Housing material		Stainless steel 1.4305 / AISI 303
Sensing face		Sapphire
Degree of protection		IP68
Mass		35 g

Connection



Installation

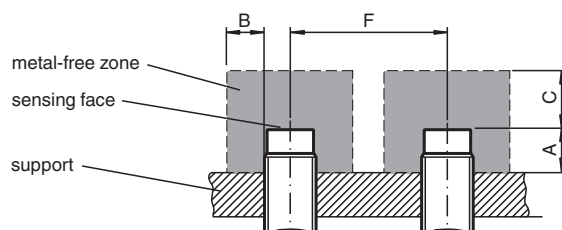

Accessories

	BF 5	Mounting flange, 5 mm
---	-------------	-----------------------