

Inductive sensor

NBB8-18GM60-B3B-V1




- 8 mm flush
- Cylindrical
- A/B slave with extended addressing possibility for up to 62 slaves
- NO/NC selectable
- On/Off delay (disconnectable)

AS-Interface



Dimensions

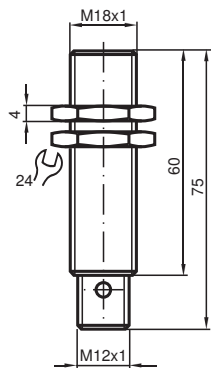


Technical Data

General specifications			
Switching function		Normally open/closed (NO/NC) programmable	
Output type		AS-Interface	
Rated operating distance	s_n	8 mm	
Installation		flush	
Assured operating distance	s_a	0 ... 6.48 mm	
Reduction factor r_{Al}		0.4	
Reduction factor r_{Cu}		0.4	
Reduction factor r_{304}		0.7	
Reduction factor r_{Brass}		0.5	
Slave type		A/B slave	
AS-Interface specification		V3.0	
Required master specification		$\geq V2.1$	


Technical Data

Output type		2-wire
Nominal ratings		
Operating voltage	U _B	26.5 ... 31.9 V via AS-i bus system
Switching frequency	f	0 ... 200 Hz
Hysteresis	H	1 ... 15 typ. 5 %
Reverse polarity protection		reverse polarity protected
No-load supply current	I ₀	≤ 25 mA
Switching state indicator		dual-LED, yellow
Error indicator		dual-LED, red
Functional safety related parameters		
MTTF _d		926 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007 EN 50295:1999
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CSA approval		cCSAus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications		
Connection type		Connector plug M12 x 1 , 4-pin
Housing material		brass, nickel-plated
Sensing face		PBT
Degree of protection		IP67

Connection



Connection Assignment



Release date: 2020-03-23 Date of issue: 2020-03-30 Filename: 226334_eng.pdf

Additional Information

Programming Instructions

Adress 00 preset, alterable
 via Busmaster
 or programming units
 IO-Code 0
 ID-Code A
 ID1-Code 7
 ID2-Code E

Data bit

Bit	Function
D0	Switching state
D1	-
D2	-
D3	-

Parameter bit

Bit	Function
P0	ON / Off delay activated* / deactivated
P1	Switching element function NO* / NC
P2	not used
P3	not used

*Standard setting

Accessories

	BF 18	Mounting flange, 18 mm
	EXG-18	Quick mounting bracket with dead stop
	V1-G-BK0,3M-PUR-U-V1-G	Connection cable, M12 to M12, PUR cable, 4-pin
	V1-G-BK1M-PUR-U-V1-G	Connection cable, M12 to M12, PUR cable, 4-pin