


Inductive sensor


NJ20+U1+E2-Y287109



- Comfort series
- 20 mm flush

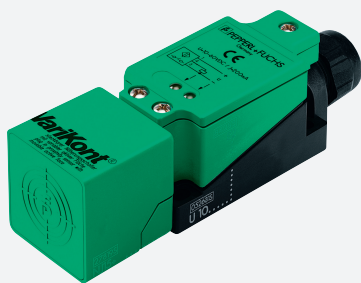

Dimensions

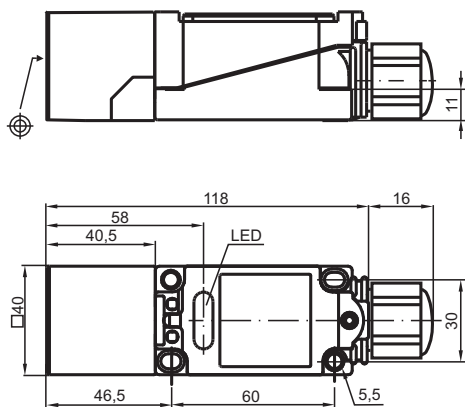

Technical Data

General specifications		
Switching function		Normally open (NO)
Output type		PNP
Rated operating distance	s_n	20 mm
Installation		flush
Output polarity		DC
Assured operating distance	s_a	0 ... 16.2 mm
Actual operating distance	s_r	18 ... 22 mm typ. 20 mm
Reduction factor r_{AI}		0.35
Reduction factor r_{Cu}		0.35
Reduction factor r_{304}		0.8
Nominal ratings		
Operating voltage	U_B	10 ... 30 V

Technical Data

Switching frequency	f	0 ... 150 Hz
Hysteresis	H	1 ... 10 typ. 5 %
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U _d	≤ 2.8 V
Voltage drop at I _L		
Voltage drop I _L = 1 mA, switching element on	U _d	0.5 ... 2.3 V typ. 0.9 V
Voltage drop I _L = 10 mA, switching element on	U _d	0.8 ... 2.2 V typ. 1.4 V
Voltage drop I _L = 20 mA, switching element on	U _d	0.9 ... 2.3 V typ. 1.5 V
Voltage drop I _L = 50 mA, switching element on	U _d	0.9 ... 2.5 V typ. 1.6 V
Voltage drop I _L = 100 mA, switching element on	U _d	1 ... 2.6 V typ. 1.8 V
Voltage drop I _L = 200 mA, switching element on	U _d	1.2 ... 2.8 V typ. 2 V
Operating current	I _L	0 ... 200 mA
Off-state current	I _r	0 ... 0.5 mA typ. 0.01 mA
Off-state current T _U = 40 °C, switching element off		≤ 100 µA
No-load supply current	I ₀	≤ 10 mA
Time delay before availability	t _v	≤ 50 ms
Operating voltage indicator		LED, green
Switching state indicator		LED, yellow
Functional safety related parameters		
MTTF _d		819 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤ 36 V
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Storage temperature		-25 ... 85 °C (-13 ... 185 °F)
Mechanical specifications		
Connection type		screw terminals
Information for connection		A maximum of two conductors with the same core cross section may be mounted on one terminal connection! tightening torque 1.2 Nm + 10 %
Core cross-section		up to 2.5 mm ²
Minimum core cross-section		without wire end ferrule 0.5 mm ² , with connector sleeves 0.34 mm ²
Maximum core cross-section		without wire end ferrule 2.5 mm ² , with connector sleeves 1.5 mm ²
Cable gland		
Note		Sealing ring: Hole diameter 7 / 10.5 / 13 / 16 mm The dimension of the connection cable must correspond to the hole selected on the sealing ring.
Housing material		PBT with Viton seals and PVDF screwed connection
Sensing face		PBT
Degree of protection		IP68

Release date: 2020-03-24 Date of issue: 2020-03-30 Filename: 287109_eng.pdf

Connection

