

- 50 mm flush
- Reduction factor = 1
- Weld Immune



Technical drawing of the LED module showing front, top, and cross-sectional views with dimensions.

Front View: A square module with a central circular lens. The overall width and height are 84 mm. The mounting flange has a width of 80 mm and a height of 65 mm. The central lens has a diameter of 65 mm. Four mounting holes are located at the corners of the flange. The text "LEDs" points to the central lens area.

Top View: Shows the module's profile. The total height is 40 mm. The mounting flange has a height of 15 mm. The central lens area is indicated by a dashed semi-circle.

Cross-sectional View: Shows the internal structure. The mounting flange has a thickness of 7 mm. The central lens has a diameter of $\phi 5.3$ mm. The mounting hole has a diameter of $\phi 9.5$ mm. The text "M12 x 1" indicates the mounting screw. The distance from the top of the flange to the center of the lens is 22 mm, and the distance from the bottom of the flange to the center of the lens is 10 mm.


General specifications

Switching function		Normally open (NO)
Output type		PNP
Rated operating distance	s _n	50 mm
Installation		flush
Output polarity		DC
Assured operating distance	s _a	0 ... 40.5 mm
Reduction factor r _{Al}		1
Reduction factor r _{Cu}		1
Reduction factor r ₃₀₄		1
Reduction factor r _{St37}		1
Nominal ratings		
Operating voltage	U _B	10 ... 30 V DC
Switching frequency	f	0 ... 1 Hz


Technical Data

Hysteresis	H	typ. 3 %
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	$\leq 3 \text{ V}$
Rated insulation voltage	U_{BIS}	50 V
Operating current	I_L	0 ... 200 mA
Off-state current	I_r	0 ... 0.5 mA
No-load supply current	I_0	$\leq 20 \text{ mA}$
Time delay before availability	t_v	$\leq 300 \text{ ms}$
Operating voltage indicator		LED, green
Switching state indicator		LED, yellow
Functional safety related parameters		
MTTF _d		944 a
Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CSA approval		cCSAus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated $\leq 36 \text{ V}$
Ambient conditions		
Ambient temperature		0 ... 50 °C (32 ... 122 °F) ($\pm 10 \%$ changing operating distance) -25 ... 70 °C (-13 ... 158 °F) ($\pm 20 \%$ changing operating distance)
Mechanical specifications		
Connection type		Connector M12 x 1 , 4-pin
Housing material		PBT/metal
Sensing face		PBT, PTFE coated
Housing base		PBT
Degree of protection		IP68

Connection



Connection Assignment



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)


Mounting

These sensors are particularly suitable for embedded installation in floor conveyor systems. The installation of the switch in a metal base plate provides it with considerable protection against mechanical damage.

Care should be taken to ensure that the cut out in the base plate is at least 104 mm x 104 mm and that the sensor is positioned centrally within this cut out.

The active surface of the sensor must not be recessed with respect to the front face of the base plate.

The high switching distance guarantees safe detection and thus control of the floor conveyor system.

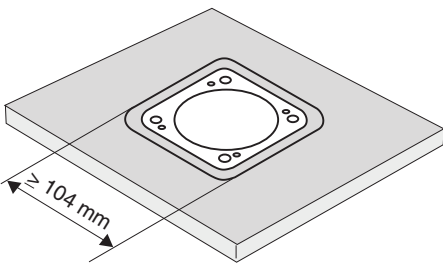

Caution!

After removal of the metal screen the proximity switch can no longer be mounted as an embedded installation.

Accessories

	V1-G-2M-PUR	Female cordset, M12, 4-pin, PUR cable
	V1-W-2M-PUR	Female cordset, M12, 4-pin, PUR cable

Release date: 2020-03-23 Date of issue: 2020-03-30 Filename: 187797_eng.pdf