

Technical Data

*For detailed data and product description refer to the data sheets at **www.pepperl-fuchs.com***

General Data	
Operating voltage	20 ... 253 V AC
Switching frequency	0 ... 25 Hz
Operating current	10 ... 500 mA
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Protection degree	IP67
Connection type	cable PVC , 2 m




Model Number			SJ15-WO	SJ15-WS	SJ30-WO	SJ30-WS
Slot width	15 mm		●	●		
	30 mm				●	●
Switching element function	AC	NO		●		●
	AC	NC	●		●	
Depth of immersion (lateral)	18.5 ... 20.5 mm		●	●		
	27 ... 31 mm				●	●
Housing material	ABS				●	●
	PBT		●	●		
Approvals and Certificates						
UL approval	cULus Listed, General Purpose		●	●	●	●
CSA approval	cCSAus Listed, General Purpose		●	●	●	●
CCC approval	Certified by China Compulsory Certification (CCC)		●	●		

Dimensions		
Length L [mm]	30	51
Width W [mm]	48	84
Height H [mm]	60	110
Slot width G [mm]	15	30
Connector area l_c [mm]	0	35 (PG13.5)

Properties


- **15 mm and 30 mm slot width versions**
- **Fast response**
- **AC, 2-wire switching output**
- **Cable version**

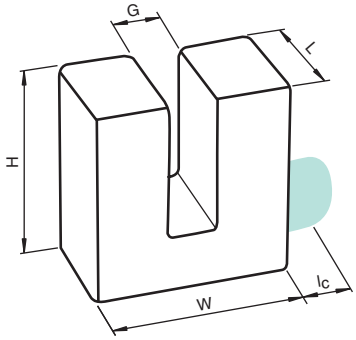


Electrical Connection



SJ15-WO
SJ30-WO



SJ15-WS
SJ30-WS



Date of issue: 07/30/2012

Consider the General Notes on the Information in the Pepperl+Fuchs Product Catalogs
Copyright Pepperl+Fuchs
Pepperl+Fuchs Group www.pepperl-fuchs.com
USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com
Germany: +49 621 776-4411 fa-info@de.pepperl-fuchs.com
Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com
PEPPERL+FUCHS SENSING YOUR NEEDS