

Technical Data

*For detailed data and product description refer to the data sheets at **www.pepperl-fuchs.com***

General Data	
No-load supply current	≤ 20 mA
Resolution	0.4 mm at max. sensing range
Deviation of the characteristic curve	± 1 % of full-scale value
Input type	1 program input
LED green	Power on
LED yellow	permanently yellow: object in the evaluation range yellow, flashing: program function, object detected
LED red	permanently red: Error red, flashing: program function, object not detected
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Material	
Housing	brass, nickel-plated
Transducer	epoxy resin/hollow glass sphere mixture; foam polyurethane, cover PBT
Protection degree	IP67
Connection type	Device connector M12 x 1 , 4-pin




Model Number		UB300-18GM40-I-V1	UB300-18GM40-U-V1	UB800-18GM40-I-V1	UB800-18GM40-U-V1
Sensing range	30 ... 300 mm	●	●		
	50 ... 800 mm			●	●
Transducer frequency	approx. 390 kHz	●	●		
	approx. 255 kHz			●	●
Operating voltage	10 ... 30 V DC , ripple 10 %$_{SS}$	●		●	
	15 ... 30 V DC , ripple 10 %$_{SS}$		●		●
Output type	1 analog output 0 ... 10 V		●		●
	1 analog output 4 ... 20 mA	●		●	
Approvals and Certificates					
UL approval	cULus Listed, General Purpose	●	●	●	●
CSA approval	cCSAus Listed, General Purpose	●	●	●	●
Dimensions					
Length L [mm]			39,2		
Diameter D [mm]			18		
Thread length l_t [mm]			24,5		
Connector area l_c [mm]			10		
LED position			Pos. C		

Properties

- 300 mm and 800 mm sensing range versions
- DC, analog output
- Ø18 mm cylindrical housing
- Connector version

Your Benefit

- Short barrel length for space-restricted mounting
- Ultra bright rear-view LEDs
- Flexible configuration via Teach-wire or UB-PROG2 pushbutton

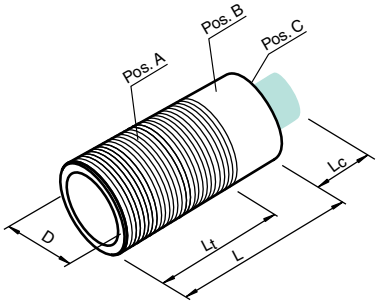

Accessories

This and more accessories can be found in chapter 3.5 from page 676
See pages from 974 ... for cordsets
See pages 1074 ... for mounting aids


UB-PROG2	Programming unit
OMH-04	Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm
BF 18	Mounting flange, 18 mm
BF 18-F	Mounting flange with dead stop, 18 mm
BF 5-30	Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm
V1-G-2M-PVC	Cable socket, M12, 4-pin, PVC cable
V1-W-2M-PUR	Cable socket, M12, 4-pin, PUR cable

Electrical Connection



UB300-18GM40-U-V1
UB800-18GM40-U-V1


Standard symbol/Connections:
(version U)




Core colours in accordance with EN 60947-5-2.

UB300-18GM40-I-V1
UB800-18GM40-I-V1

Standard symbol/Connections:
(version I)



Core colours in accordance with EN 60947-5-2.



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Date of issue: 07/30/2012

Consider the General Notes on the Information in the Pepperl+Fuchs Product Catalogs
Copyright Pepperl+Fuchs
Pepperl+Fuchs Group www.pepperl-fuchs.com
USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com
Germany: +49 621 776-4411 fa-info@de.pepperl-fuchs.com
Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com
PEPPERL+FUCHS SENSING YOUR NEEDS