





Inductive ring sensor
RC10-14-N0

■ 10 mm inside diameter

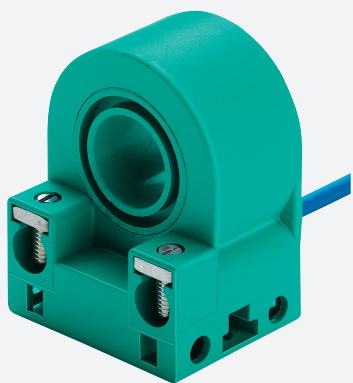

Dimensions

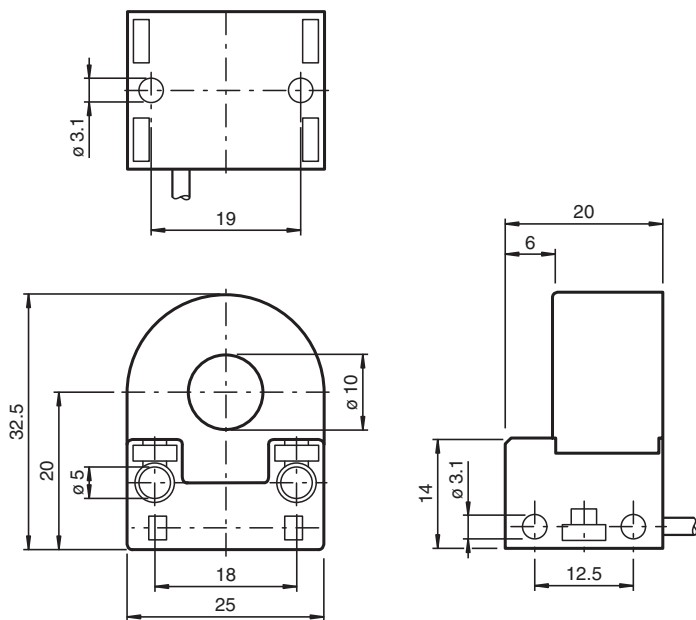

Technical Data

General specifications			
Switching function		Normally closed (NC)	
Output type		NAMUR	
Inside diameter		10 mm	
Measuring cylinder		9S20K	
Diameter		2.5 mm	
Length		4 mm	
Output type		2-wire	
Nominal ratings			
Nominal voltage	U _o	8.2 V (R _i approx. 1 kΩ)	
Operating voltage	U _B	5 ... 25 V	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Switching frequency	f	0 ... 2000 Hz
Suitable for 2:1 technology		yes , Reverse polarity protection diode not required
Current consumption		
Measuring plate not detected		min. 3 mA at maximum permissible ambient temperature, the current consumption can drop to 1.6 mA
Measuring plate detected		≤ 1 mA
Functional safety related parameters		
MTTF _d		6150 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
NAMUR		EN 60947-5-6:2000 IEC 60947-5-6:1999
Electromagnetic compatibility		NE 21:2007
Standards		EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012
Approvals and certificates		
ATEX approval		
Equipment protection level Gb		PTB 99 ATEX 2128 X
FM approval		
Control drawing		116-0165
UL approval		cULus Listed, General Purpose
CSA approval		cCSAus Listed, General Purpose
Ambient conditions		
Ambient temperature		-20 ... 65 °C (-4 ... 149 °F)
Mechanical specifications		
Connection type		cablE PVC , 2 m
Core cross-section		0.14 mm ²
Housing material		PBT
Degree of protection		IP67
Cable		
Cable diameter		2.6 mm ± 0.2 mm
Bending radius		> 10 x cable diameter
Mass		36 g
General information		
Use in the hazardous area		see instruction manuals

Connection

