


Inductive ring sensor

RC15-14-N3-Y115615

- 15 mm inside diameter
- Comfort series
- Bistable
- Direction detection



Dimensions

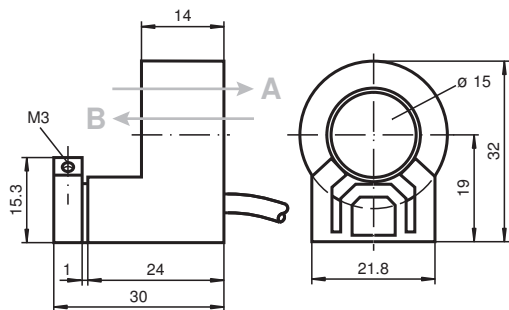

Technical Data

General specifications		
Switching function		Normally closed (NC)
Output type		NAMUR, bistable
Inside diameter		15 mm
Measuring cylinder		
Diameter		1/4" (6.250mm)
Measuring cone		Carboloy
Output type		2-wire
Nominal ratings		
Nominal voltage	U _o	8 V
Operating voltage	U _B	5 ... 25 V
Hysteresis	H	typ. 1 %
Reverse polarity protection		reverse polarity protected
Current consumption		
Traverse B		3 mA
Passage B U _B =8V		≥ 3 mA
Passage B U _B =10V		≥ 4.2 mA
Traverse A		1 mA

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Passage A $U_B=10V$		0.5 ... 1 mA typ. 0.9 mA
Passage A $U_B=8V$		0.5 ... 0.95 mA typ. 0.8 mA
Time delay before availability	t_v	≤ 5 ms
Functional safety related parameters		
MTTF _d		2240 a
Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
NAMUR		EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CSA approval		cCSAus Listed, General Purpose
Ambient conditions		
Ambient temperature		0 ... 40 °C (32 ... 104 °F)
Mechanical specifications		
Connection type		cable PVC , 5 m
Core cross-section		0.14 mm ²
Housing material		PBT
Degree of protection		IP67
Cable		
Bending radius		> 10 x cable diameter
General information		
Use in the hazardous area		see instruction manuals

Connection

