




Dimensions

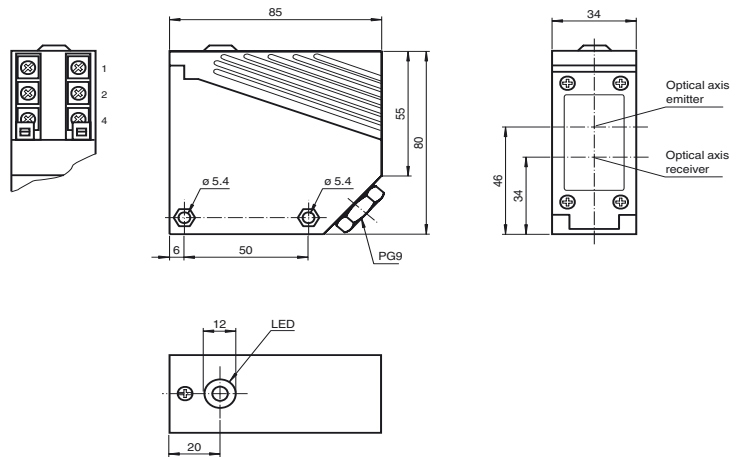

Model Number

RL36-8-2000-Ex/40b/116


Diffuse mode sensor, NAMUR, large housing design, 2000 mm detection range, infrared light, light/dark on, DC version, NAMUR output, terminal compartment

Features

- ATEX approval for zone 1 (Gas)
- Intrinsically safe, Ex op is ia IIC T4 Gb
- Resistant against noise
- Diffuse mode sensor for standard applications

Electrical connection

Option: 40b



○ = Light on
● = Dark on

Technical data

General specifications

Detection range	0 ... 2000 mm
Adjustment range	350 ... 2000 mm
Reference target	standard white 200 mm x 200 mm
Light source	IRED , 860 nm
Light type	modulated infrared light
Ambient light limit	≤ 10000 Lux sun light ≤ 7500 Lux halogen light
Temperature influence	≤ 5 mm/K

Functional safety related parameters

MTTF _d	1319 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Indicators/operating means

Function indicator	LED yellow: switching state
Control elements	Sensing range adjuster

Electrical specifications

Operating voltage	U _B	6 ... 20 V DC (R _i approx. 0 Ohm)
Ripple		5 %
Time delay before availability	t _v	20 ms

Output

Switching type	light/dark on, programmable	
Signal output	1 NAMUR output NC/NO programmable	
Switching voltage	8 V DC (R _i approx. 1 kΩ)	
Repeat accuracy	≤ 5 %	
Switching frequency	f	≤ 100 Hz

Current consumption

Reference target detected	connection 1, 2: ≤ 1 mA connection 1, 4: ≥ 2.2 mA
Reference target not detected	connection 1, 2: ≥ 2.2 mA connection 1, 4: ≤ 1 mA
Response time	5 ms

Directive conformity

Electromagnetic compatibility	
Directive 2014/30/EU	EN 60947-5-2:2007+A1:2012

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 80 °C (-40 ... 176 °F)

Mechanical specifications

Degree of protection	IP54
Connection	terminal compartment PG9, ≤ 2.5 mm ²
Material	
Housing	PMMA
Optical face	PMMA
Mass	200 g

Compliance with standards and directives

Standard conformity	
Product standard	EN 60947-5-2
Standards	EN 60947-5-6:2000


Approvals and certificates

CCC approval	CCC approval / marking not required for products rated ≤36 V
--------------	--

Curves / Diagrams

Characteristic response curve

RL36-8

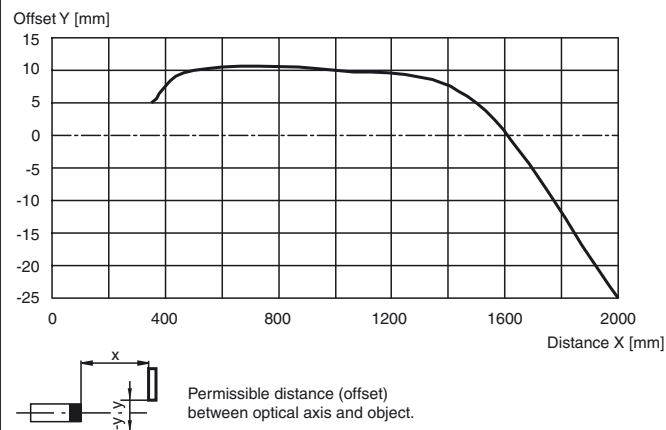

Detection ranges

RL36-8-Ex

