



Model Number

SB4-OR-4CP-4C


Safety control unit

Safety control unit of series SB4


Features

- Evaluation device for safety thru-beam sensors SLA12 and SLA29 and for 2 channel safety devices (emergency off)
- 8 sensor channels
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- Operating mode can be selected by means of DIP switches
- Start/Restart disable
- Relay monitor
- Pre-fault indication
- Clearly visible LED functional display
- 7-segment diagnostic display
- Safety outputs OSSD, external status displays OSSD

Dimensions

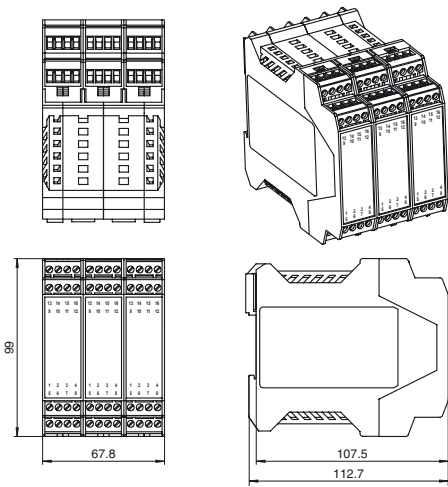

Electrical connection



Terminal Slot 1	
Terminal	Function
1	Reset input; normally closed contact
2	Restart input (RI); normally closed contact
3	24 V DC connection for reset, restart and RM
4	Relay monitor (RM)
5 - 6	OSSD1; potential free relay contact; normally open contact
7 - 8	OSSD2; potential free relay contact; normally open contact
9	Signal output OSSD OFF
10	Signal output OSSD ON
11	Signal output restart
12	Leave free (n.c.)
13	+24 V DC supply voltage
14	0 V DC supply voltage
15	Earth
16	Leave free (n.c.)

Terminal Slot 2 and Slot 3		
Terminal	Function	Channel assignment
1	Receiver 2 input	Channel 2
2	Receiver 2 +U	
3	Transmitter 2 +U	Output
4	Transmitter 2 output	
5	Receiver 1 input	Channel 1
6	Receiver 1 +U	
7	Transmitter 1 +U	Output
8	Transmitter 1 output	
9	Transmitter 3 +U	Channel 3
10	Transmitter 3 output	
11	Receiver 3 +U	Input
12	Receiver 3 input	
13	Transmitter 4 output	Channel 4
14	Transmitter 4 +U	
15	Receiver 4 +U	Output
16	Receiver 4 input	

Technical data

General specifications

Operating mode Start/restart disable, relay monitor,

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 3
Performance level (PL)	PL e
Category	Cat. 4
Mission Time (T _M)	20 a
PFH _d	3.5 E-9
B _{10d}	see instruction manuals
Type	4

Indicators/operating means

Diagnostics indicator	7-segment display
Function indicator	LED red: OSSD OFF LED green: OSSD ON Yellow LED: start readiness channel 1 - 8 LED yellow: switching state (receiver)
Pre-fault indicator	LED yellow flashing: Indicator lamp channel 1 ... 8

Electrical specifications

Operating voltage	U _B	24 V DC, ± 20 %
No-load supply current	I ₀	max. 500 mA

Input

Activation current	approx. 7 mA
Activation time	0.4 ... 1.2 s
Test input	Reset-input for system test

Output

Safety output	2 relay outputs, force-guided NO-contact
Signal output	Output for displaying the switching state of the OSSDs
Switching voltage	10 V ... 250 V AC/DC
Switching current	min. 10 mA , max. 6 A AC/DC
Switching power	DC: max. 24 VA AC: max. 230 VA
Response time	38 ms

Conformity

Release date: 2017-12-06 14:43 Date of issue: 2017-12-06 180325_eng.xml

Functional safety	ISO 13849-1 ; EN 61508 part1-4
Product standard	EN 61496-1

Ambient conditions

Ambient temperature	0 ... 50 °C (32 ... 122 °F)
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)

Mechanical specifications

Degree of protection	IP20
Connection	screw terminals , lead cross section 0.2 ... 2 mm ²
Material	
Housing	Polyamide (PA)
Mass	430 g

Approvals and certificates

CE conformity	CE
UL approval	cULus
TÜV approval	TÜV

Function

The evaluation system SB4 is an ESPE of type 4 (EN 61496-1 or IEC 61496-1) or category 4 (EN 954-1). This system is also designed and tested according to IEC 61508. It meets the requirements for the SIL3.

The operating instructions supplied with the device must be observed for planning, installation and operation.

A maximum of 8 safety light barriers can be connected to the evaluation device. Instead of the light barriers, other contact safety equipment can be connected.

Operating modes

By default, the restart interlock is activated.

Each assembly contains DIP switches for selecting the functions. For selecting functions, 2 selector switches must always be actuated.

Switches on the first assembly:

switch	Position	Operation type
1 and 3	OFF	Without restart interlock (restart, RI)
	ON	With restart interlock (restart, RI)
2 and 4	OFF	Without relay monitor (RM)
	ON	With relay monitor (RM)

Switches on the second assembly:

switch	Position	Operation type
1 and 3	OFF	No antivalent evaluation
	ON	Antivalent evaluation active
2 and 4	OFF	No simultaneousness evaluation
	ON	Simultaneousness evaluation active

Displays

The OSSD-R/supply module on position 1 has a red/green LED for indicating the OSSD on/off statuses, a yellow LED for the start-ready status and a 7 segment display for system diagnosis.

The 7 segment display indicates the status and the error codes of the system.

Display	7 segment display
1	DIP switch position does not match
2	Incorrect configuration
3	Time-out at one or more muting sensors
4	Transmitter error
6	Muting lamp error
7	Simultaneousness monitoring error
8	Receiver error
9	Error at sensor channel
E	System error
F	Relay monitor error
H	Selection chain error



U	Low voltage or voltage surge detected
---	---------------------------------------

Release date: 2017-12-06 14:43 Date of issue: 2017-12-06 180325_eng.xml