




Base for read/write station

U-P3-R4

- Degree of protection IP67
- Simple bus system with up to 30 units
- Serial interface RS 485, addressable


Base with addressable serial Interface RS 485



Function

The base is used in combination with an upper part, the IPT*-FP read/write station. An addressable RS 485 interface is available. It is thus possible to create a simple bus connection with up to 30 subscribers. The address is set and the terminating resistor for the bus is connected via DIP switches. The read/write station is connected to a higher-order control system via the serial interface and receives the commands for writing and/or reading code or data carriers via this interface.

Dimensions

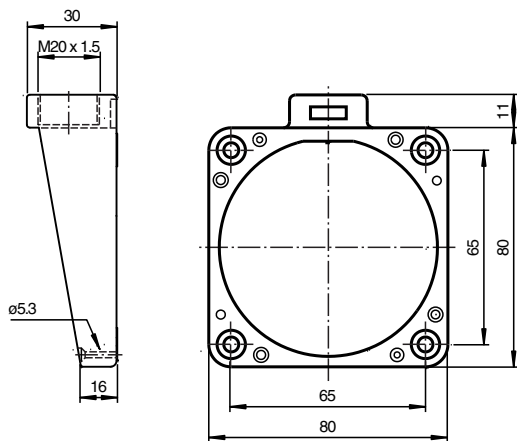


Technical Data

Indicators/operating means		
DIP switch		Setting the station address bus connection ON = active OFF = non-active
Electrical specifications		
Rated operating voltage	U _e	20 ... 30 V DC , ripple 10 % _{SS} , PELV
Power consumption	P ₀	max. 4 W with read/write head IPT*-FP
Galvanic isolation		
Operating voltage/interface		functional insulation acc. to DIN EN 50178, rated insulation voltage 50 V _{eff}
Interface		
Physical		RS-485, addressable , up to 30 bases , address 1 ... 30

Technical Data

Protocol	ASCII
Transfer rate	1200; 2400; 4800; 9600; 19200; 38400 Bit/s
Cable length	≤ 1200 m
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Degree of protection	IP67 according to EN 60529 with IPT*-FP
Connection	screw terminals
Interface cable	2 conductor, acc. to RS-485
Supply	up to 3 x 1.5 mm²
Material	
Housing	diecast aluminum

Connection

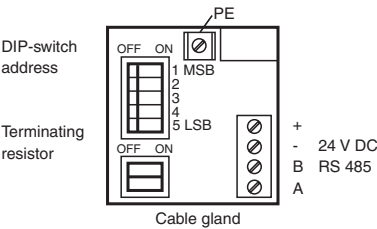

Matching system components

	IPT1-FP	LF R/W system, fully assembled as configuration and test station
---	----------------	--

Release date: 2020-03-31 Date of issue: 2020-03-31 Filename: 110696_eng.pdf