


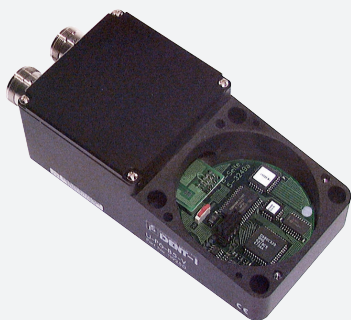

Base for read/write station

U-P6-B5-V

- Bus subscriber for INTERBUS installation
- 500 kBit/s or 2 MBit/s transfer rate (switchable)
- M23 round connection for BUS and supply
- Complete read/write functionality via the INTERBUS
- Transfer of 10 bytes of data in one cycle
- Field device with degree of protection IP67


Base for INTERBUS, plug-in connection



Function

The base is used in combination with an upper part, the IPT*-FP read/write station.
The device is operated as a slave at the INTERBUS installation remote bus. The device offers the full read/write functionality. Up to 10 byte per cycle can be transferred.
By means of an internal slide switch the transfer rate can be switched over between 500 kbit/s and 2 Mbit/s.
The rounded connector M23 for BUS and supply allows a rapid assembly.

Dimensions

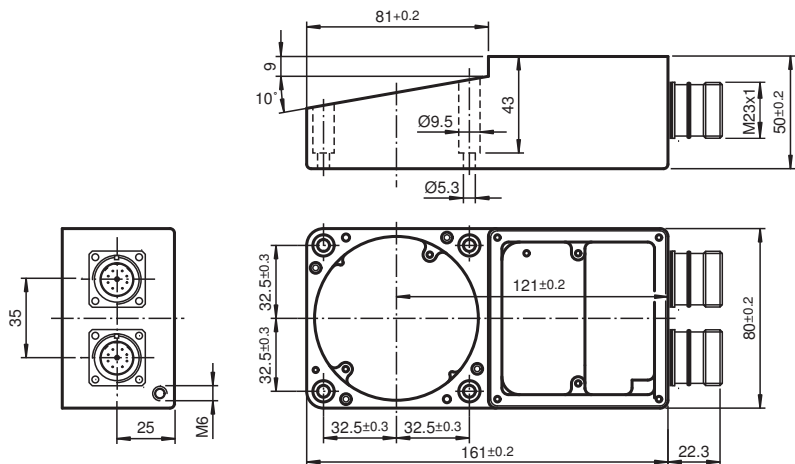

Technical Data

Electrical specifications

Rated operating voltage	U _e	20 ... 30 V DC , ripple 10 % _{SS} , PELV
Power consumption	P ₀	max. 5 W with read/write head IPT*-FP
Galvanic isolation		
Operating voltage/interface		functional insulation acc. to DIN EN 50178, rated insulation voltage 50 V _{eff}

Interface

Physical		RS-485
Protocol		INTERBUS remote bus
ID code		03
Transfer rate		500 kBit/s or 2 MBit/s internally switchable

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS


Technical Data

Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications		
Degree of protection		IP67 according to EN 60529 with IPT*-FP
Connection		Round connector M23, 8+1 Pin Connector: incoming interface socket: outgoing Interface
Interface cable		up to 1.5 mm ²
Supply		up to 3 x 1.5 mm ²
Material		
Housing		aluminum, black anodized

Connection

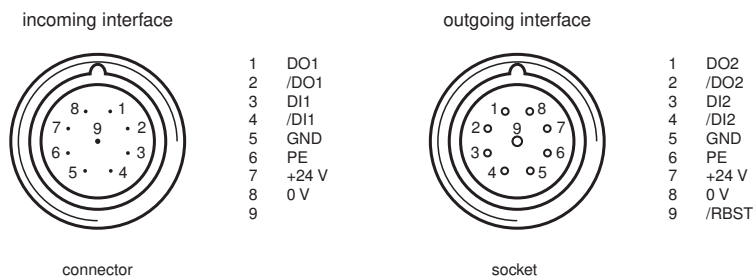

Assembly

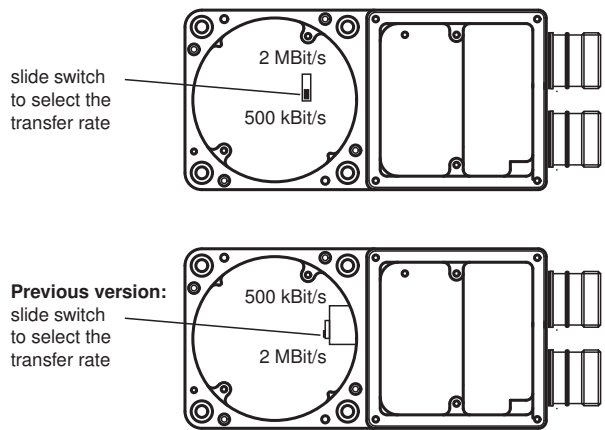

Matching system components

	IPT1-FP	LF R/W system, fully assembled as configuration and test station
--	----------------	--

Release date: 2020-03-31 Date of issue: 2020-03-31 Filename: 119250_eng.pdf