



Model Number


V17-G-20M-PUR

Female cordset, M12, 8-pin, shielded, PUR cable

Features

- Immunity to vibration, with mechanical latching
- Shield applied to Pin 8
- Gold plated contacts
- Halogen-free


Dimensions

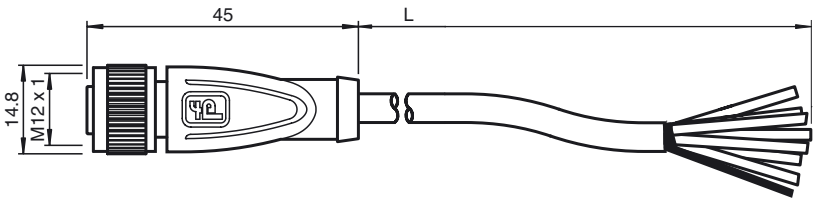

Technical data

General specifications		
Number of pins	7 + 1 x screen	
Connection 1	socket	
Construction type 1	straight	
Threading 1	M12	
Connection 2	cable end	
Electrical specifications		
Operating voltage	U _B	max. 30 V DC
Operating current	I _B	max. 2 A
Volume resistance	< 10 mΩ , Contact resistance 53 Ω/km	
Ambient conditions		
Ambient temperature	cable, flexing: -5 to 70 °C (268 to 343 K), cable, fixed: -25 to 70 °C (248 to 343 K)	
Pollution degree	3	
Mechanical specifications		
Contact elements	spring-loaded contact socket	
Pin diameter	1 mm	
Degree of protection	IP67	
Material		
Contacts	CuSn	
Contact surface	Au	
Body	TPU, black	
Cable	PUR	
Slotted nut	CuZn, nickel-plated	
Core insulation	PP	
Cable	fine-strand, flexible	
Sheath diameter	Ø 6 mm	
Bending radius	> 10 x cable diameter, moving	
Color	grey	
Number of cores	8	
Core cross-section	0.25 mm ²	
Conductor construction	14 x 0.15 mm Ø	
Shield	grid covering 85 %	
Length	L	20 m
Flammability		
Contact carrier	94 HB	
Housing	94 V-2	
Compliance with standards and directives		
Standard conformity		
Degree of protection	EN 60529:2000	
Standards	IEC 61076-2-101:2008	
Flammability	Grip: UL 94	

Electrical connection

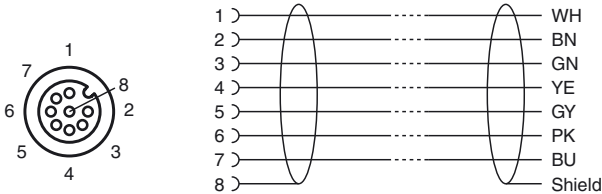

Release date: 2018-03-15 14:32 Date of issue: 2018-03-15 203407_eng.xml